

TSN: Lecture 17

Digital Transmission

Topics Covered

- Digital-To-Digital Conversation
- Line Coding
- Mapping Data symbols onto
- Data rate and Baud rate

4-1 DIGITAL-TO-DIGITAL CONVERSION

*In this section, we see how we can represent digital data by using digital signals. The conversion involves three techniques: **line coding**, **block coding**, and **scrambling**. Line coding is always needed; block coding and scrambling may or may not be needed.*


Topics discussed in this section:

- Line Coding
- Line Coding Schemes
- Block Coding
- Scrambling

Line Coding

- Converting a string of 1's and 0's (digital data) into a sequence of signals that denote the 1's and 0's.
- For example a high voltage level (+V) could represent a "1" and a low voltage level (0 or -V) could represent a "0".

Figure 4.1 *Line coding and decoding*

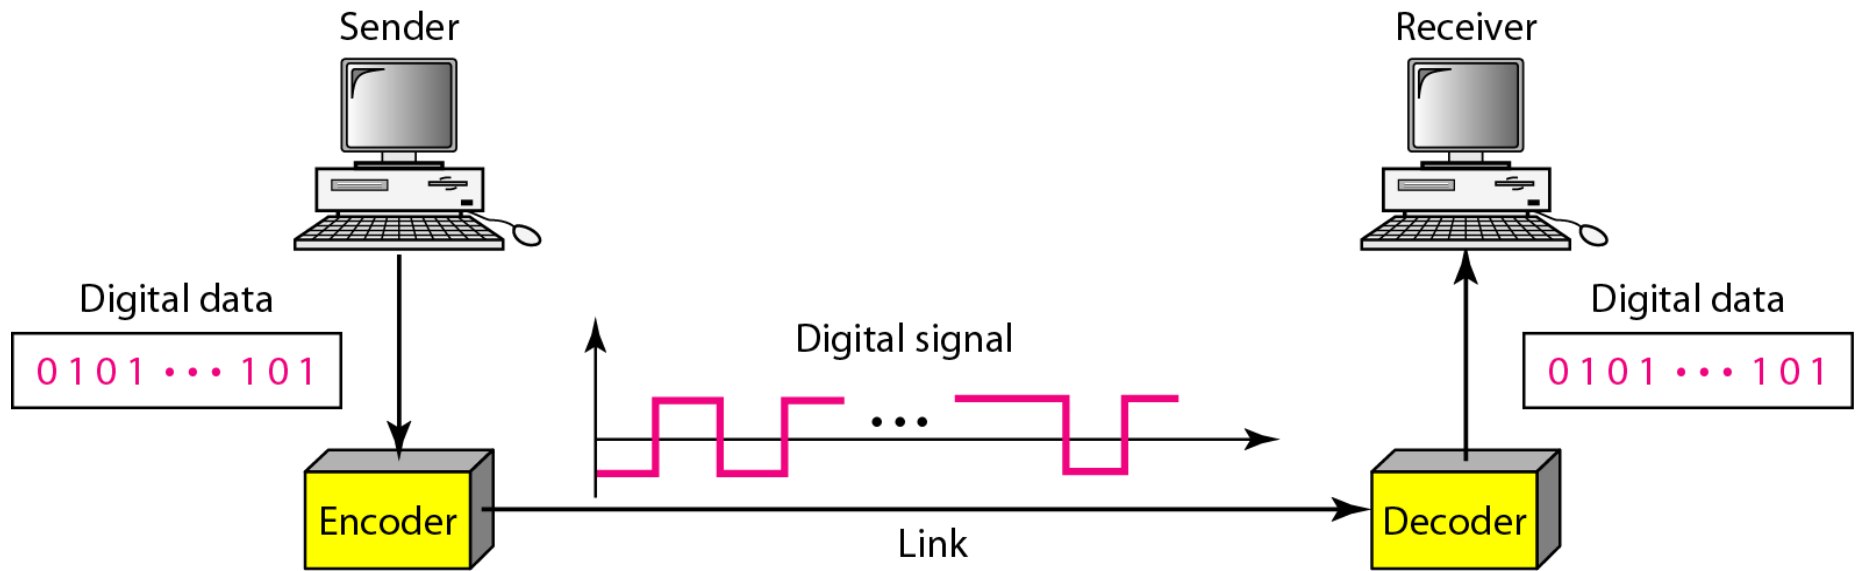


Mapping Data symbols onto Signal levels

- A data symbol (or element) can consist of a number of data bits:
 - 1, 0 or
 - 11, 10, 01,
- A data symbol can be coded into a single signal element or multiple signal elements
 - 1 \rightarrow +V, 0 \rightarrow -V
 - 1 \rightarrow +V and -V, 0 \rightarrow -V and +V
- The ratio 'r' is the number of data elements carried by a signal element.


Relationship between data rate and signal rate

- The data rate defines the number of bits sent per sec - bps. It is often referred to the bit rate.
- The signal rate is the number of signal elements sent in a second and is measured in bauds. It is also referred to as the modulation rate.
- Goal is to increase the data rate whilst reducing the baud rate.


Figure 4.2 Signal element versus data element

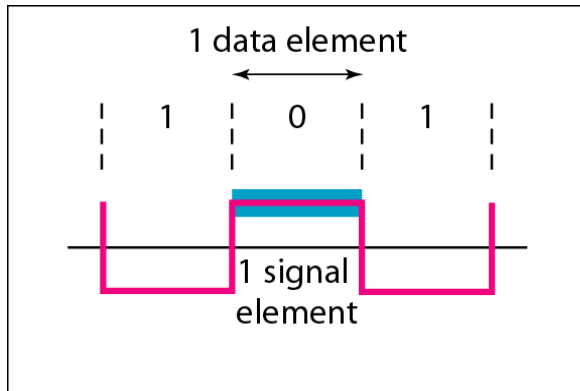


a. One data element per one signal element ($r = 1$)

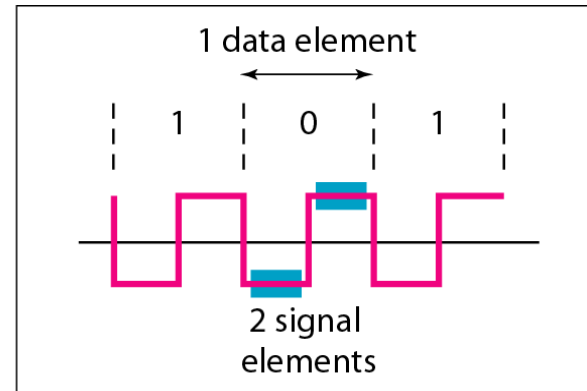

b. One data element per two signal elements ($r = \frac{1}{2}$)

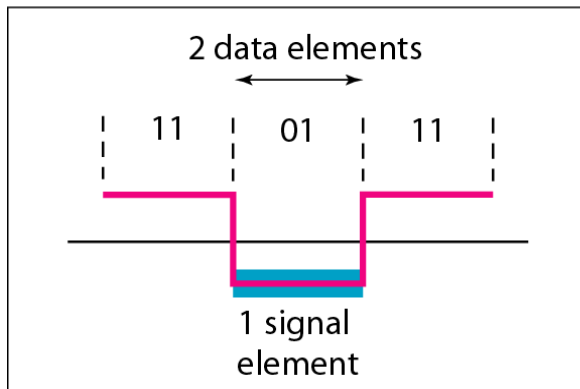

c. Two data elements per one signal element ($r = 2$)

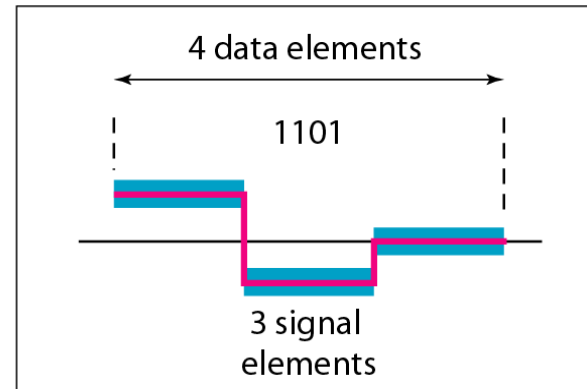

d. Four data elements per three signal elements ($r = \frac{4}{3}$)

Data rate and Baud rate

- The baud or signal rate can be expressed as:

$$S = c \times N \times 1/r \text{ bauds}$$

where N is data rate

c is the case factor (worst, best & avg.)

r is the ratio between data element & signal element

Example 4.1

A signal is carrying data in which one data element is encoded as one signal element ($r = 1$). If the bit rate is 100 kbps, what is the average value of the baud rate if c is between 0 and 1?

Solution

We assume that the average value of c is $1/2$. The baud rate is then

$$S = c \times N \times \frac{1}{r} = \frac{1}{2} \times 100,000 \times \frac{1}{1} = 50,000 = 50 \text{ kbaud}$$