



# Topic Covered: Fourier Analysis



# FOURIER SERIES

- Usually, a signal is described as a function of time .
- There are some **amazing** advantages if a signal can be expressed in the frequency domain.
- Fourier transform analysis is named after Jean Baptiste Joseph Fourier (1768-1830).


- A **Fourier series** (FS) is used for representing a continuous-time periodic signal as weighted superposition of sinusoids.
- **Periodic Signals** A continuous-time signal is said to be **periodic** if there exists a positive constant such that

where  $T_0$  is the period of the signal.


$$x(t) = x(t + T_0)$$

$T_0$

- $T_0$ : fundamental Period
- $f_0 = \frac{1}{T_0}$ : fundamental frequency
- Example: Periodic and aperiodic signal

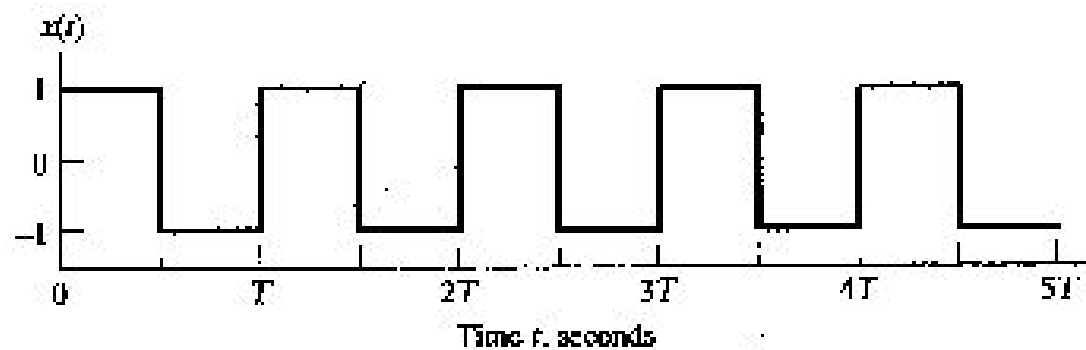

(a)



(b)




## After the analysis, we obtain the following information about the signal:

- I. What all frequency components are presenting the signal?
- II. Their amplitude and
- III. The relative phase difference between these frequency components.

All the frequency components are nothing else but sine waves at those frequencies.

# A sum of Sines and Cosines

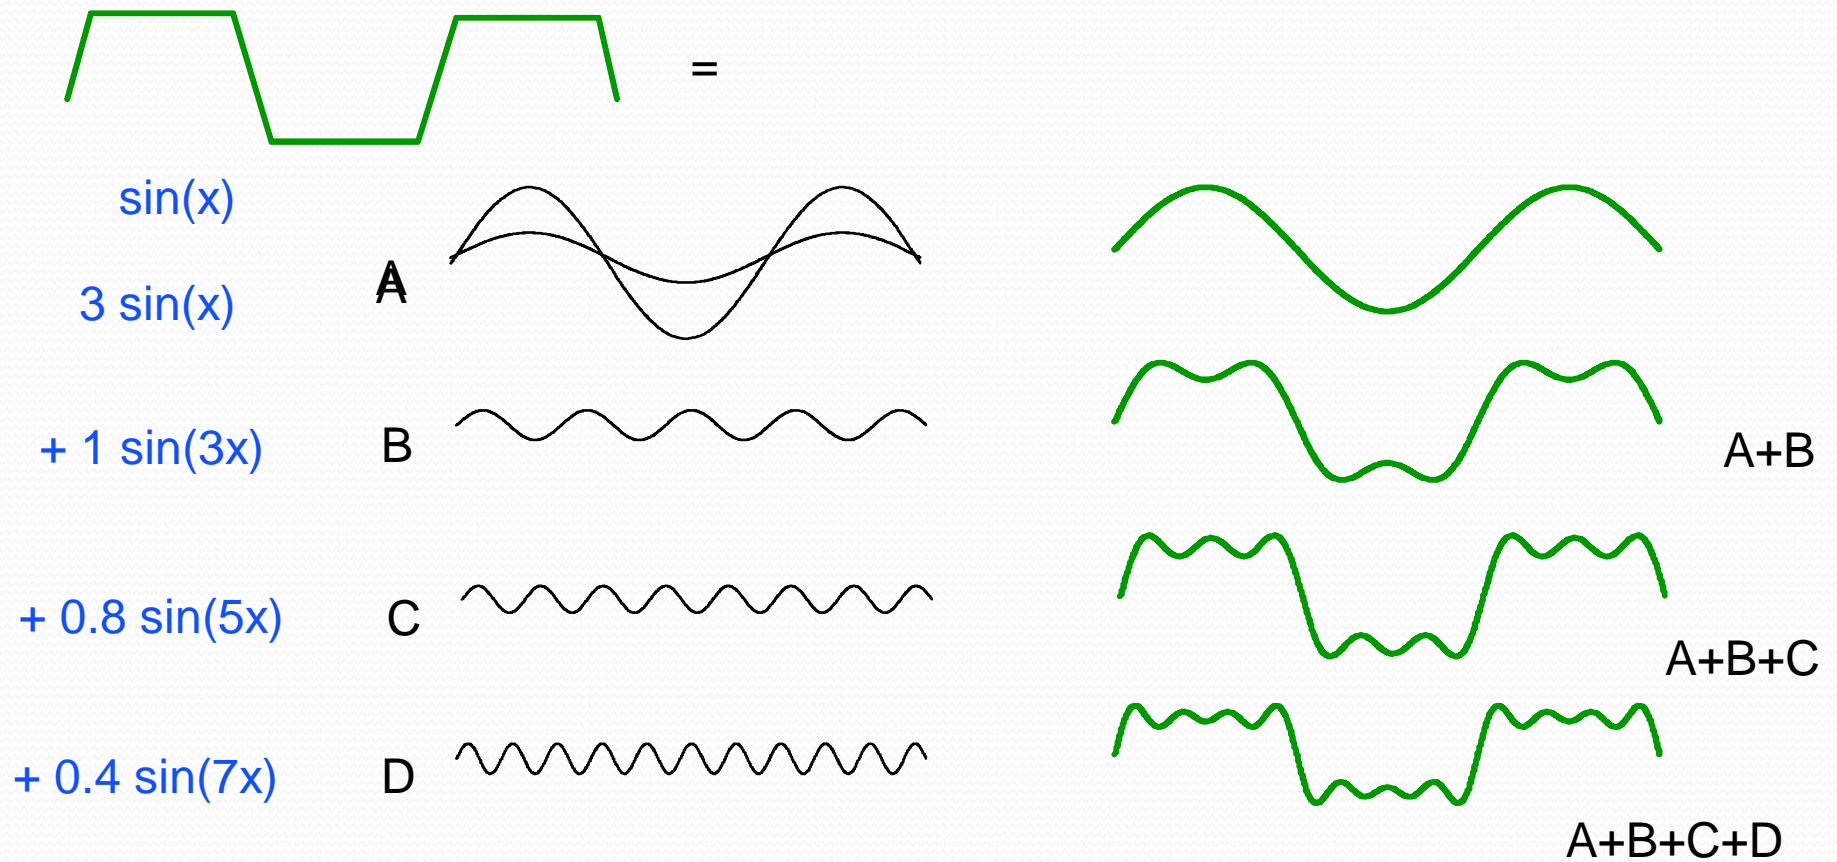

# Existence of the Fourier Series

- Existence

$$\int_0^{T_0} |f(t)| dt < \infty$$

- Convergence for all  $t$

$$|f(t)| < \infty \quad \forall t$$

- Finite number of maxima and minima in one period of  $f(t)$
- These are known as the Dirichlet conditions

# Fourier Series

- General representation of a periodic signal
- Fourier series coefficients
- Polar Form of Fourier series

$$f(t) = a_0 + \sum_{n=1}^{\infty} a_n \cos(n\omega_0 t) + b_n \sin(n\omega_0 t)$$

$$a_0 = \frac{1}{T_0} \int_0^{T_0} f(t) dt$$

$$a_n = \frac{2}{T_0} \int_0^{T_0} f(t) \cos(n\omega_0 t) dt$$

$$b_n = \frac{2}{T_0} \int_0^{T_0} f(t) \sin(n\omega_0 t) dt$$

$$f(t) = c_0 + \sum_{n=1}^{\infty} c_n \cos(n\omega_0 t + \theta_n)$$

where  $c_0 = a_0$ ,  $c_n = \sqrt{a_n^2 + b_n^2}$ , and

$$\theta_n = \tan^{-1} \left( \frac{-b_n}{a_n} \right)$$




- $\{x_n\}$  are called the **Fourier series coefficients** of the signal  $x(t)$ .
- The quantity  $f_0 = \frac{1}{T_0}$  is called the fundamental frequency of the signal  $x(t)$
- The Fourier series expansion can be expressed in terms of angular frequency  $\omega_0 = 2\pi f_0$  by

$$x_n = \frac{\omega_0}{2\pi} \int_{\alpha}^{\alpha+2\pi/\omega_0} x(t) e^{-jn\omega_0 t} dt$$

and

$$x(t) = \sum_{n=-\infty}^{\infty} x_n e^{jn\omega_0 t}$$

- Discrete spectrum - We may write  $x_n = |x_n| e^{j\angle x_n}$ , where  $|x_n|$  gives the magnitude of the  $n$ th harmonic and  $\angle x_n$  gives its phase.

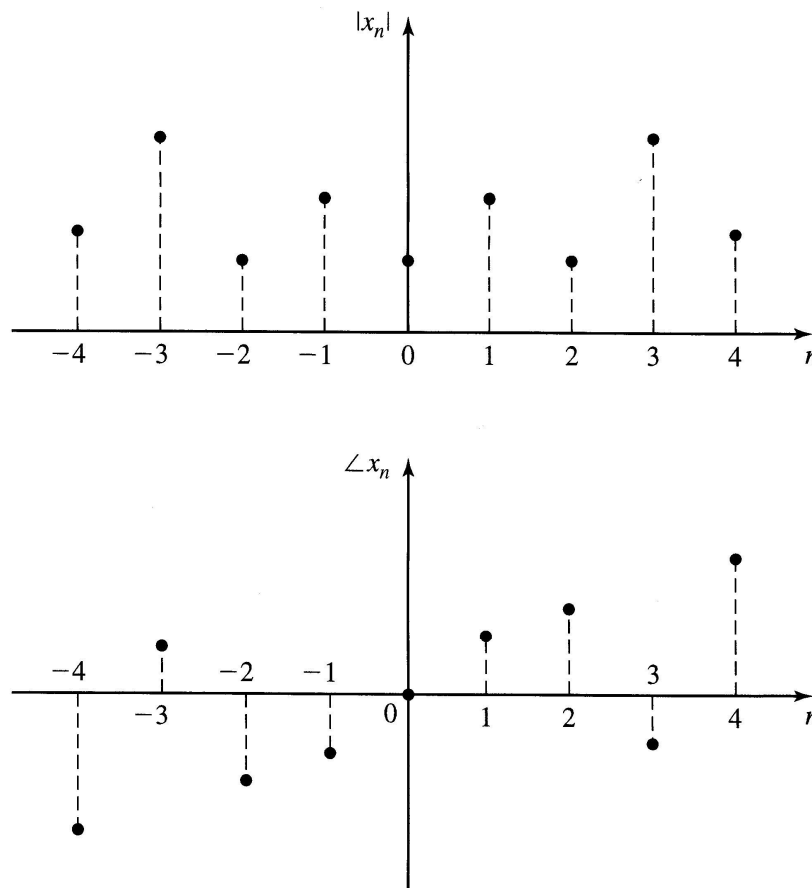

**Figure 2.1** The discrete spectrum of  $x(t)$ .

- Example: Let  $x(t)$  denote the periodic signal depicted in Figure 2.2

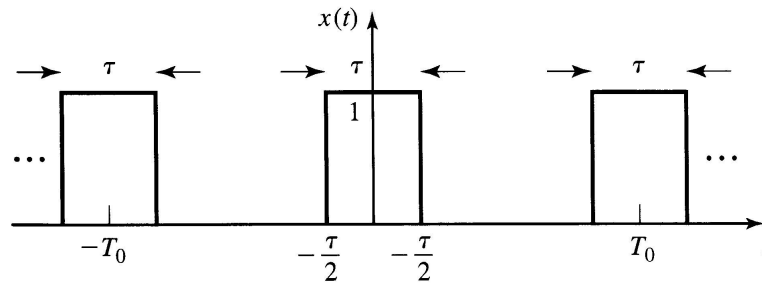


Figure 2.2 Periodic signal  $x(t)$ .

$$x(t) = \sum_{n=-\infty}^{\infty} \Pi\left(\frac{t - nT_0}{\tau}\right), \quad T_0 > \tau,$$

where

$$\Pi(t) = \begin{cases} 1, & |t| < \frac{1}{2} \\ \frac{1}{2}, & |t| = \frac{1}{2} \\ 0, & \text{otherwise.} \end{cases}$$

is a rectangular pulse. Determine the Fourier series expansion for this signal.

Solution: We first observe that the period of the signal is  $T_0$  and

$$x_n = \frac{1}{T_0} \int_{-T_0/2}^{T_0/2} x(t) e^{-jn \frac{2\pi t}{T_0}} dt$$

$$= \frac{1}{T_0} \int_{-\tau/2}^{\tau/2} 1 e^{-jn \frac{2\pi t}{T_0}} dt$$

$$= \frac{1}{T_0 - jn2\pi} \left[ e^{-jn \frac{n\tau}{T_0}} - e^{jn \frac{n\tau}{T_0}} \right]$$


$$= \frac{1}{\pi n} \sin\left(\frac{n\pi\tau}{T_0}\right)$$

$$= \frac{\tau}{T_0} \operatorname{sinc}\left(\frac{n\tau}{T_0}\right)$$



$$\operatorname{sinc}(x) = \frac{\sin(\pi x)}{\pi x}$$

Therefore, we have


$$x(t) = \sum_{n=-\infty}^{\infty} \frac{\tau}{T_0} \operatorname{sinc}\left(\frac{n\tau}{T_0}\right) e^{jn\frac{2\pi}{T_0}t}$$

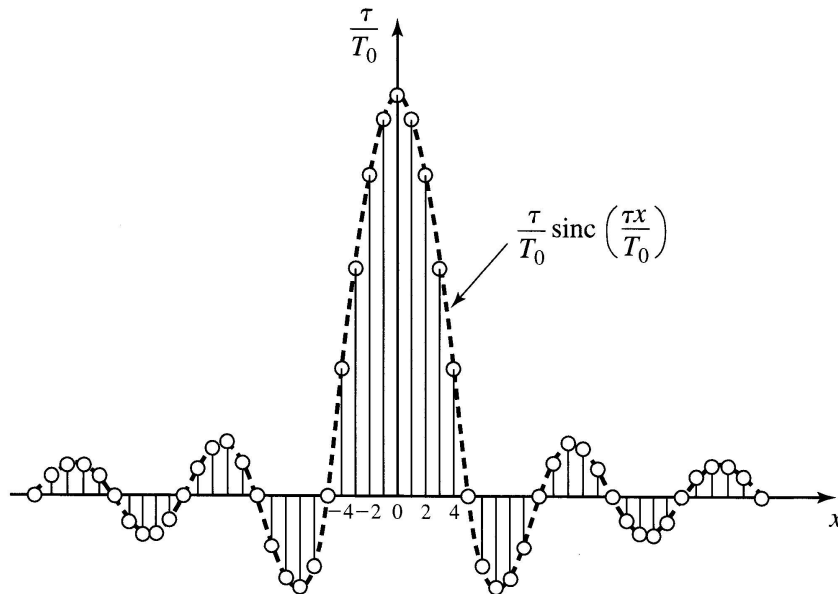

**Figure 2.3** The discrete spectrum of the rectangular pulse train.

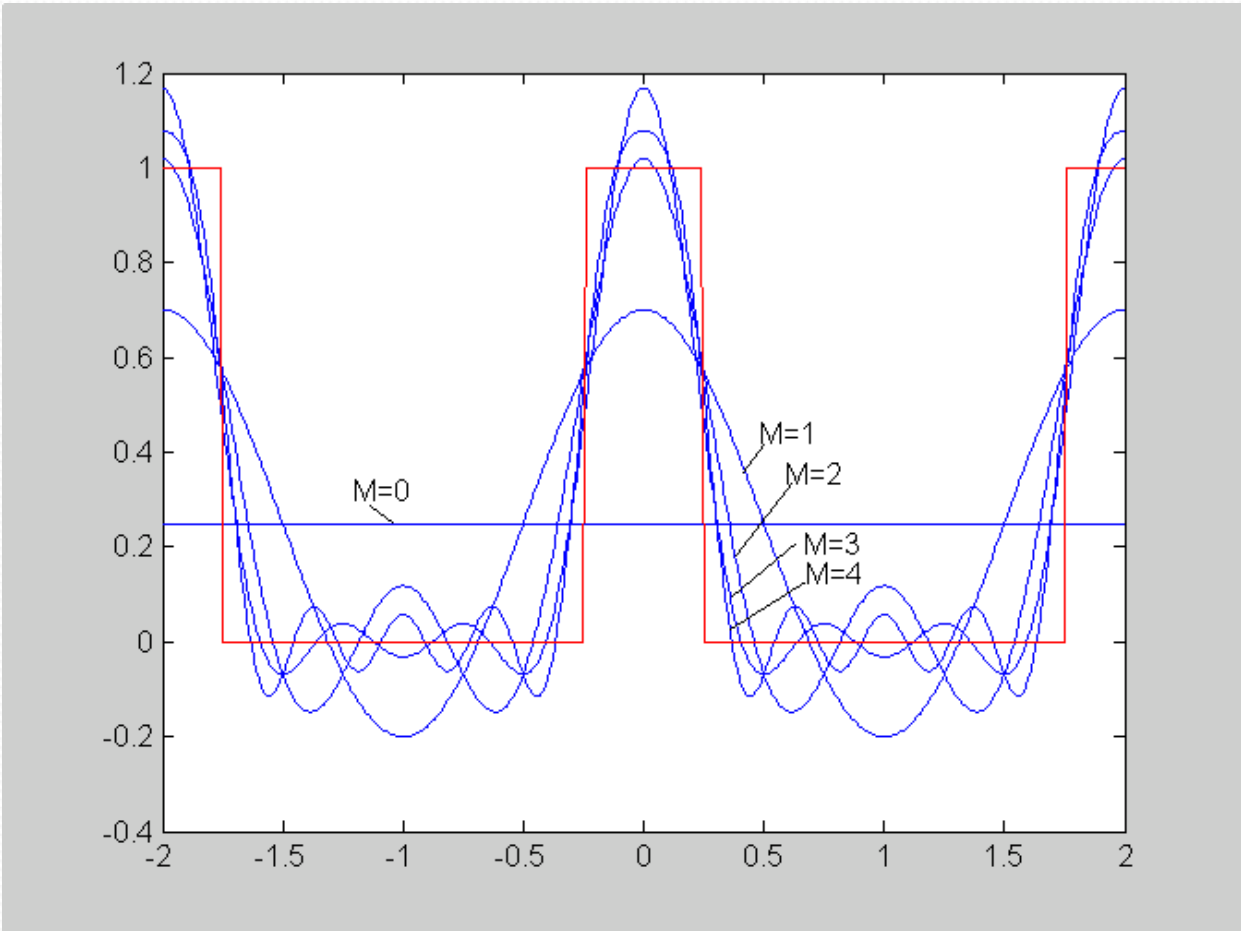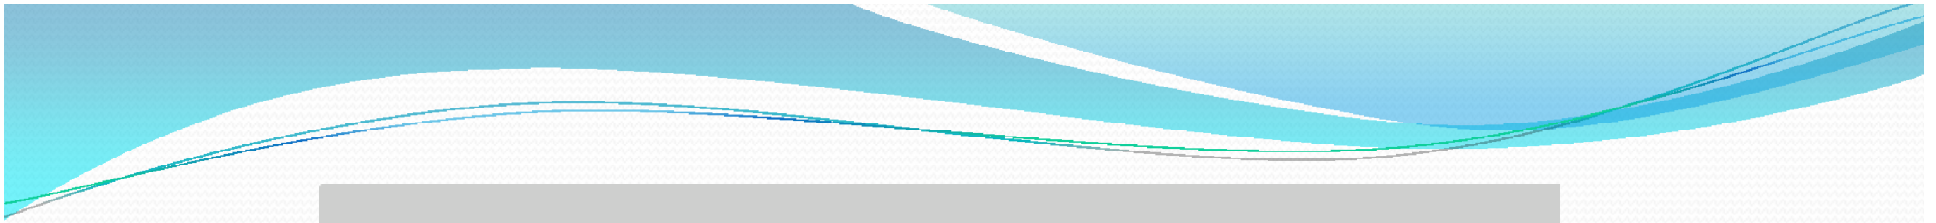

# Example #1

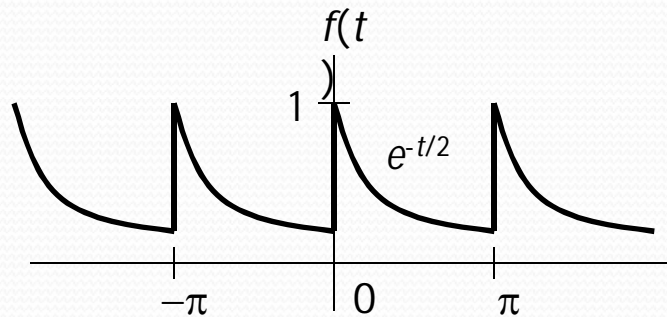

- Fundamental period

$$T_0 = \pi$$

- Fundamental frequency

$$f_0 = 1/T_0 = 1/\pi \text{ Hz}$$

$$\omega_0 = 2\pi/T_0 = 2 \text{ rad/s}$$

$$f(t) = a_0 + \sum_{n=1}^{\infty} a_n \cos(2nt) + b_n \sin(2nt)$$

$$a_0 = \frac{1}{\pi} \int_0^{\pi} e^{-t/2} dt = -\frac{2}{\pi} \left( e^{-\pi/2} - 1 \right) \approx 0.504$$


$$a_n = \frac{2}{\pi} \int_0^{\pi} e^{-t/2} \cos(2nt) dt = 0.504 \left( \frac{2}{1+16n^2} \right)$$

$$b_n = \frac{2}{\pi} \int_0^{\pi} e^{-t/2} \sin(2nt) dt = 0.504 \left( \frac{8n}{1+16n^2} \right)$$

$a_n$  and  $b_n$  decrease in amplitude as  $n \rightarrow \infty$ .

$$f(t) = 0.504 \left[ 1 + \sum_{n=1}^{\infty} \frac{2}{1+16n^2} (\cos(2nt) + 4n \sin(2nt)) \right]$$

# Example #2

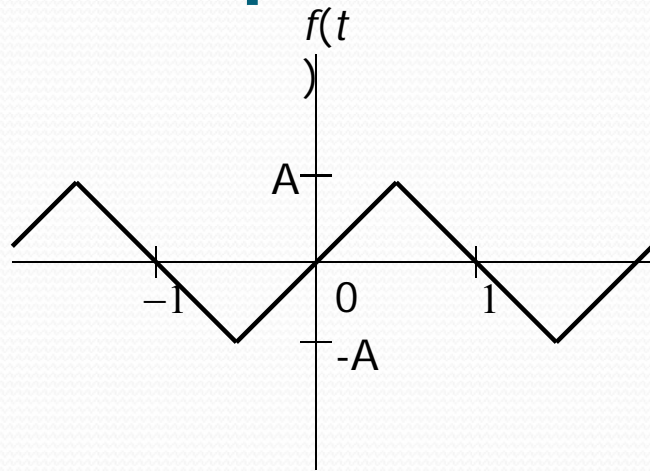

- Fundamental period  
 $T_0 = 2$
- Fundamental frequency  
 $f_0 = 1/T_0 = 1/2$  Hz  
 $\omega_0 = 2\pi/T_0 = \pi$  rad/s

$$f(t) = a_0 + \sum_{n=1}^{\infty} a_n \cos(\pi n t) + b_n \sin(\pi n t)$$

$$a_0 = 0 \quad (\text{by inspection of the plot})$$

$$a_n = 0 \quad (\text{because it is odd symmetric})$$


$$b_n = \frac{2}{\pi} \int_{-1/2}^{1/2} 2A t \sin(\pi n t) dt +$$

$$\frac{2}{\pi} \int_{1/2}^{3/2} (2A - 2A t) \sin(\pi n t) dt$$

$$b_n = \begin{cases} 0 & n \text{ is even} \\ \frac{8A}{n^2 \pi^2} & n = 1, 5, 9, 13, \dots \\ -\frac{8A}{n^2 \pi^2} & n = 3, 7, 11, 15, \dots \end{cases}$$



# Example #3

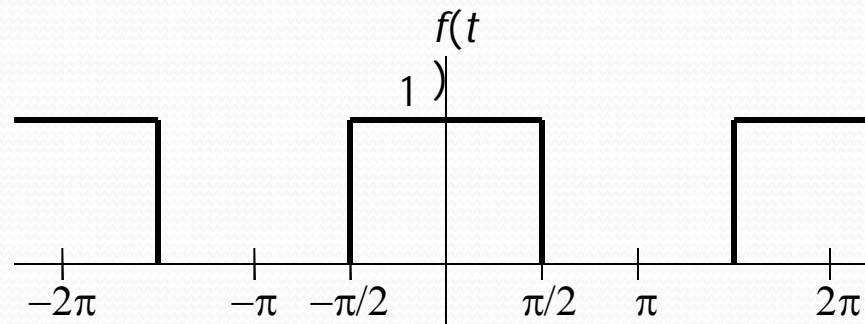

- Fundamental period  
 $T_0 = 2\pi$
- Fundamental frequency  
 $f_0 = 1/T_0 = 1/2\pi$  Hz  
 $\omega_0 = 2\pi/T_0 = 1$  rad/s

$$C_0 = \frac{1}{2}$$

$$C_n = \begin{cases} 0 & n \text{ even} \\ \frac{2}{\pi n} & n \text{ odd} \end{cases}$$


$$\theta_n = \begin{cases} 0 & \text{for all } n \neq 3, 7, 11, 15, \dots \\ -\pi & n = 3, 7, 11, 15, \dots \end{cases}$$

Table 1: Properties of the Continuous-Time Fourier Series

$$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_0 t} = \sum_{k=-\infty}^{+\infty} a_k e^{jk(2\pi/T)t}$$

$$a_k = \frac{1}{T} \int_T x(t) e^{-jk\omega_0 t} dt = \frac{1}{T} \int_T x(t) e^{-jk(2\pi/T)t} dt$$

Property	Periodic Signal	Fourier Series Coefficients
	$\left. \begin{array}{l} x(t) \\ y(t) \end{array} \right\} \begin{array}{l} \text{Periodic with period } T \text{ and} \\ \text{fundamental frequency } \omega_0 = 2\pi/T \end{array}$	$\begin{array}{l} a_k \\ b_k \end{array}$
Linearity	$Ax(t) + By(t)$	$Aa_k + Bb_k$
Time-Shifting	$x(t - t_0)$	$a_k e^{-jk\omega_0 t_0} = a_k e^{-jk(2\pi/T)t_0}$
Frequency-Shifting	$e^{jM\omega_0 t} = e^{jM(2\pi/T)t} x(t)$	$a_{k-M}$
Conjugation	$x^*(t)$	$a_{-k}^*$
Time Reversal	$x(-t)$	$a_{-k}$
Time Scaling	$x(\alpha t), \alpha > 0$ (periodic with period $T/\alpha$ )	$a_k$
Periodic Convolution	$\int_T x(\tau) y(t - \tau) d\tau$	$T a_k b_k$
Multiplication	$x(t) y(t)$	$\sum_{l=-\infty}^{+\infty} a_l b_{k-l}$
Differentiation	$\frac{dx(t)}{dt}$	$jk\omega_0 a_k = jk \frac{2\pi}{T} a_k$
Integration	$\int_{-\infty}^t x(t) dt$ (finite-valued and periodic only if $a_0 = 0$ )	$\left( \frac{1}{jk\omega_0} \right) a_k = \left( \frac{1}{jk(2\pi/T)} \right) a_k$

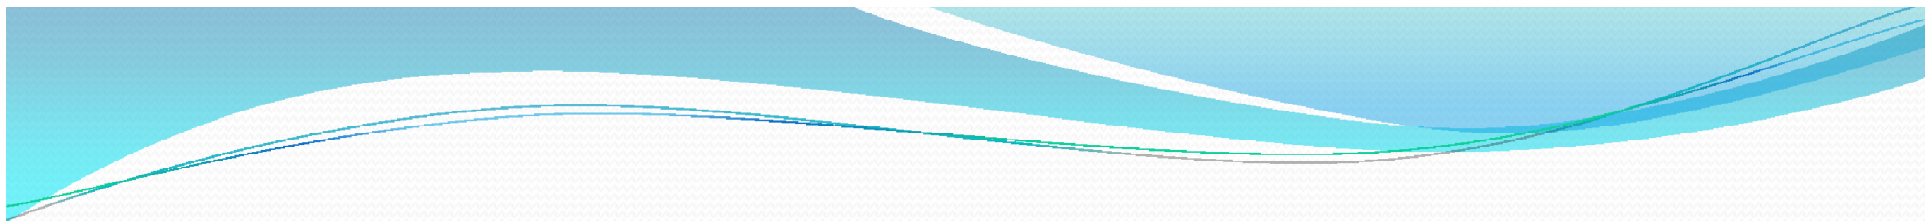

Conjugate Symmetry  
for Real Signals

$x(t)$  real

$$\begin{cases} a_k = a_{-k}^* \\ \Re\{a_k\} = \Re\{a_{-k}\} \\ \Im\{a_k\} = -\Im\{a_{-k}\} \\ |a_k| = |a_{-k}| \\ \angle a_k = -\angle a_{-k} \end{cases}$$

Real and Even Sig-  
nals

$x(t)$  real and even

$a_k$  real and even

Real and Odd Signals

$x(t)$  real and odd

$a_k$  purely imaginary and odd

Even-Odd Decompo-  
sition of Real Signals

$$\begin{cases} x_e(t) = \mathcal{E}v\{x(t)\} & [x(t) \text{ real}] \\ x_o(t) = \mathcal{O}d\{x(t)\} & [x(t) \text{ real}] \end{cases}$$

$$\begin{cases} \Re\{a_k\} \\ j\Im\{a_k\} \end{cases}$$

Parseval's Relation for Periodic Signals

$$\frac{1}{T} \int_T |x(t)|^2 dt = \sum_{k=-\infty}^{+\infty} |a_k|^2$$