



# RS-232 Communications

# Why Serial Communications?

- ◆ Serial communication is the most simplistic form of communication between two devices.
- ◆ It's pretty intuitive once you see the pattern.
- ◆ It's what started networking!

# So What is RS-232?

- ◆ RS-232 is a standard by which two serial devices communicate:
  - The connection must be no longer than 50 feet.
  - Transmission voltages are  $-15\text{V}$  and  $+15\text{V}$ .
  - It is designed around transmission of *characters* (of 7 bits of length).

## RS-232 (cont.)

- ◆ One important aspect of RS-232 is that it is an asynchronous form of communication.
- ◆ Asynchronous communication is important because it is efficient; if no data needs to be sent, the connection is "idle." No additional CPU overhead is required for an idle serial line.

# Logical Voltages

- ◆ RS-232 is a little non-intuitive at first.
- ◆ Logical 1 is  $-15\text{VDC}$ .
- ◆ Logical 0 is  $+15\text{VDC}$ .
- ◆ When the connection is idle, the hardware ties the connection to logical 1.

# How Can You Transmit Data?

- ◆ RS-232 communication is dependent on a set timing speed at which both pieces of hardware communicate. In other words, the hardware knows how long a bit should be high or low.
- ◆ RS-232 also specifies the use of “start” and “stop” bits.

# Sending One Character

- ◆ Every time a character is sent, the same communication occurs:
  1. Start bit sent.
  2. Seven data bits sent.
  3. Stop bit sent.
  
- ◆ This communication is dependent on the fact that both devices are sampling the bits at the same rate! We'll see what happens if this doesn't happen...

# Ok, So What's the Start Bit?

- ◆ The start bit is a logical 0 sent on the line to tell the other device to start sampling.
- ◆ Remember, the logical 0 is +15VDC.




# And the Stop Bit?

- ◆ The stop bit is a logical 1. –15VDC.
- ◆ A stop bit is always sent (per RS-232 standards).

# To Talk the Talk...

- ◆ We've mentioned that both devices must have the same speeds to talk, but they must also know to handle problems.
- ◆ The transmission rate of serial devices is called *baud*. It is the number of changes in the signal per second.

# A Sample Transmission

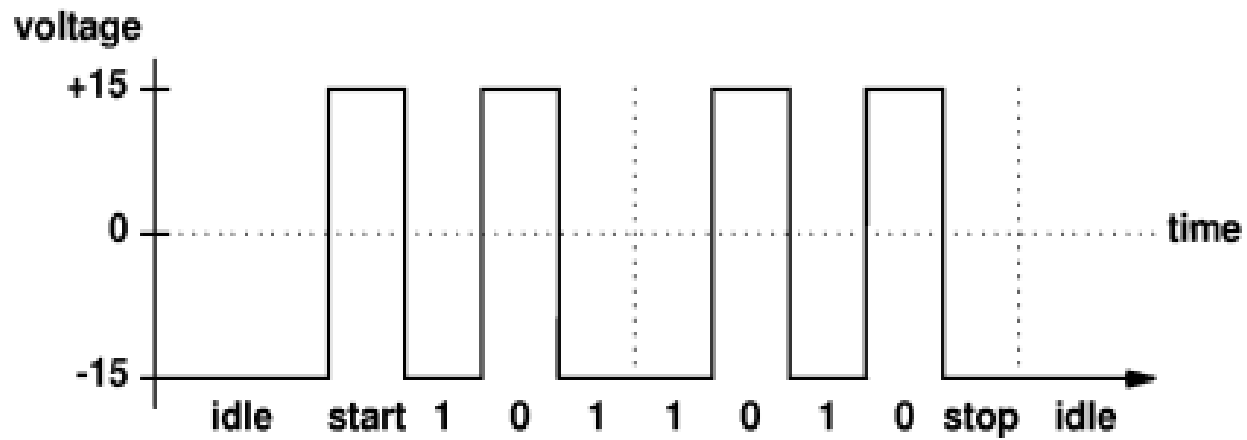

# Common Serial Settings

- ◆ Most settings are read in the following form:
  - Bits per second
  - Number of data bits
  - Parity
  - Number of Stop bits
- ◆ If you want to know what Parity is right now, read chapter 6.7. Otherwise, wait.

# Common Serial Settings cont.


- ◆ Most everything comes out of the box with 9600,8,none,1. Including most Internet related devices like routers.
- ◆ Another common (old-school) setting is 9600,7,even,2.

# Line Sampling & Framing

- ◆ RS-232 hardware samples the line multiple times during a single bit transmission.
- ◆ If the samples do not all have the same voltage, a *framing error* occurs.
- ◆ A framing error should only occur if one device is sending faster than the other device is set to receive.
- ◆ An intentional frame error can be caused by sending a BREAK.

# Full Duplex Transmission

- ◆ Full duplex transmission (FDX) occurs when data is transmitted (or can be transmitted) simultaneously by both devices. Special wiring is needed for FDX.

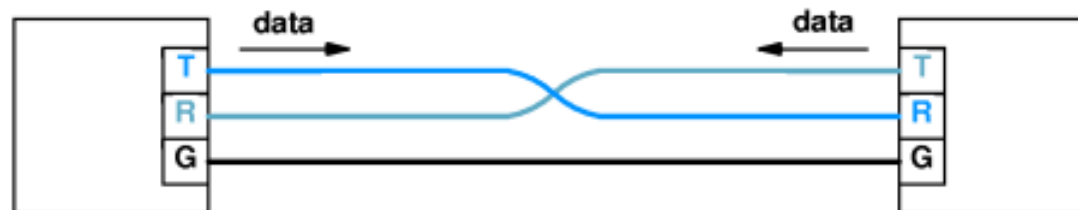


# Wiring RS-232

- ◆ The RS-232 specification denotes usage of a 25 pin cable, where each pin has a specific usage.
- ◆ However, most devices never need to use all of the pins, so the cabling requirements for specific devices may vary.
- ◆ Many common serial devices (modems for example), use a 9 pin serial connection.




# RS-232 DB25 Pin Out

DB-25M	Function	Abbreviation
Pin #1	Chassis/Frame Ground	GND
Pin #2	Transmitted Data	TD
Pin #3	Receive Data	RD
Pin #4	Request To Send	RTS
Pin #5	Clear To Send	CTS
Pin #6	Data Set Ready	DSR
Pin #7	Signal Ground	GND
Pin #8	Data Carrier Detect	DCD or CD
Pin #9	Transmit + (Current Loop)	TD+
Pin #11	Transmit - (Current Loop)	TD-
Pin #18	Receive + (Current Loop)	RD+
Pin #20	Data Terminal Ready	DTR
Pin #22	Ring Indicator	RI
Pin #25	Receive - (Current Loop)	RD-

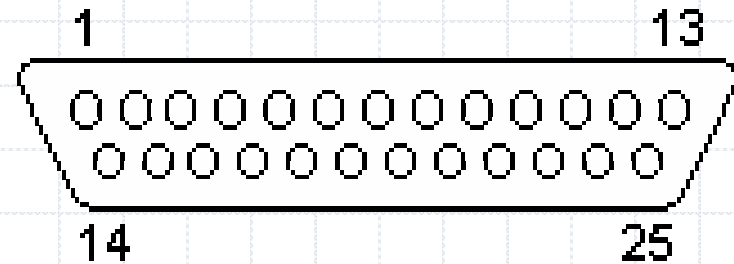

# RS-232 DB9 Pin Out

DB-9M	Function	Abbreviation
Pin #1	Data Carrier Detect	CD
Pin #2	Receive Data	RD or RX or RXD
Pin #3	Transmitted Data	TD or TX or TXD
Pin #4	Data Terminal Ready	DTR
Pin #5	Signal Ground	GND
Pin #6	Data Set Ready	DSR
Pin #7	Request To Send	RTS
Pin #8	Clear To Send	CTS
Pin #9	Ring Indicator	RI



# Connector Types

- ◆ The two different connectors are associated with two major types of hardware
- ◆ The Computer Terminal Equipment (CTE) and the Data Terminal Equipment (DTE).

# Connector Types (cont.)

- ◆ For ease-of-use, a computer will transmit on pin 2 and receive on pin 3 (the CTE, remember).
- ◆ Vice versa: a modem will transmit on pin 3, and receive on pin 2 (for the DTE).

# Speed Limitations


- ◆ For people familiar with modem communications, there is a speed limitation associated with the transmission.
- ◆ 56k (56 kilobit) analog modems are pretty much the fastest analog modems that consumers are going to see. This limitation is due to telephone systems, not the computer systems.

# Speed Limitations (cont.)

- ◆ However, serial communications between devices also has its own speed barrier.
- ◆ RS-232 was designed with the understanding that the analog world is far from perfect.
- ◆ Digital is fast, analog is slow. RS-232 is analog, therefore is it slow (in computing terms).

# Why Is It Slow?

- ◆  $\Delta t$  exists. The change is not instantaneous.
- ◆ Sampling does not occur immediately, so it must wait  $\Delta t + t_0$
- ◆ Cable length increases delay.
- ◆ Etc.

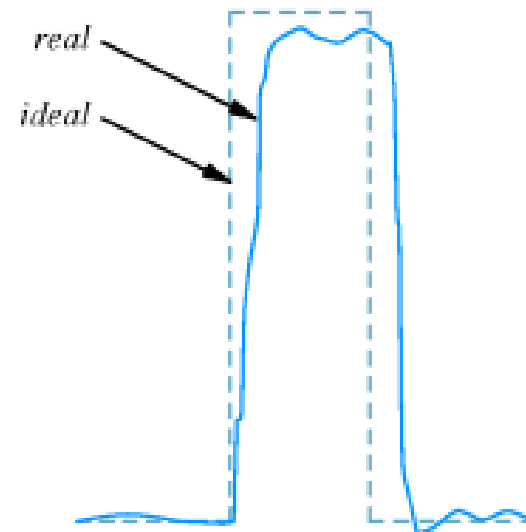

# Noise

- ◆ Signal noise is bad. It is caused by a variety of sources, all of which lead to lower speeds and less reliable transmission.
- ◆ Shannon's Theorem shows that the maximum transmission rate of a voice call (analog) is  $\sim 30,000$  bps (30kbps).