THE OSI REFERENCE MODEL

Design issues for the Layers

- Mechanism for identifying senders and receivers
- Rules for data transfer (Simplex, Half Duplex, Full Duplex)
- Error control mechanism
- Flow control Mechanism
- Data sequencing.
- Multiplexing and Demultiplexing Mechanism
- Routing

2-1   LAYERED TASKS

We use the concept of layers in our daily life. As an example, let us consider two friends who communicate through postal mail. The process of sending a letter to a friend would be complex if there were no services available from the post office.
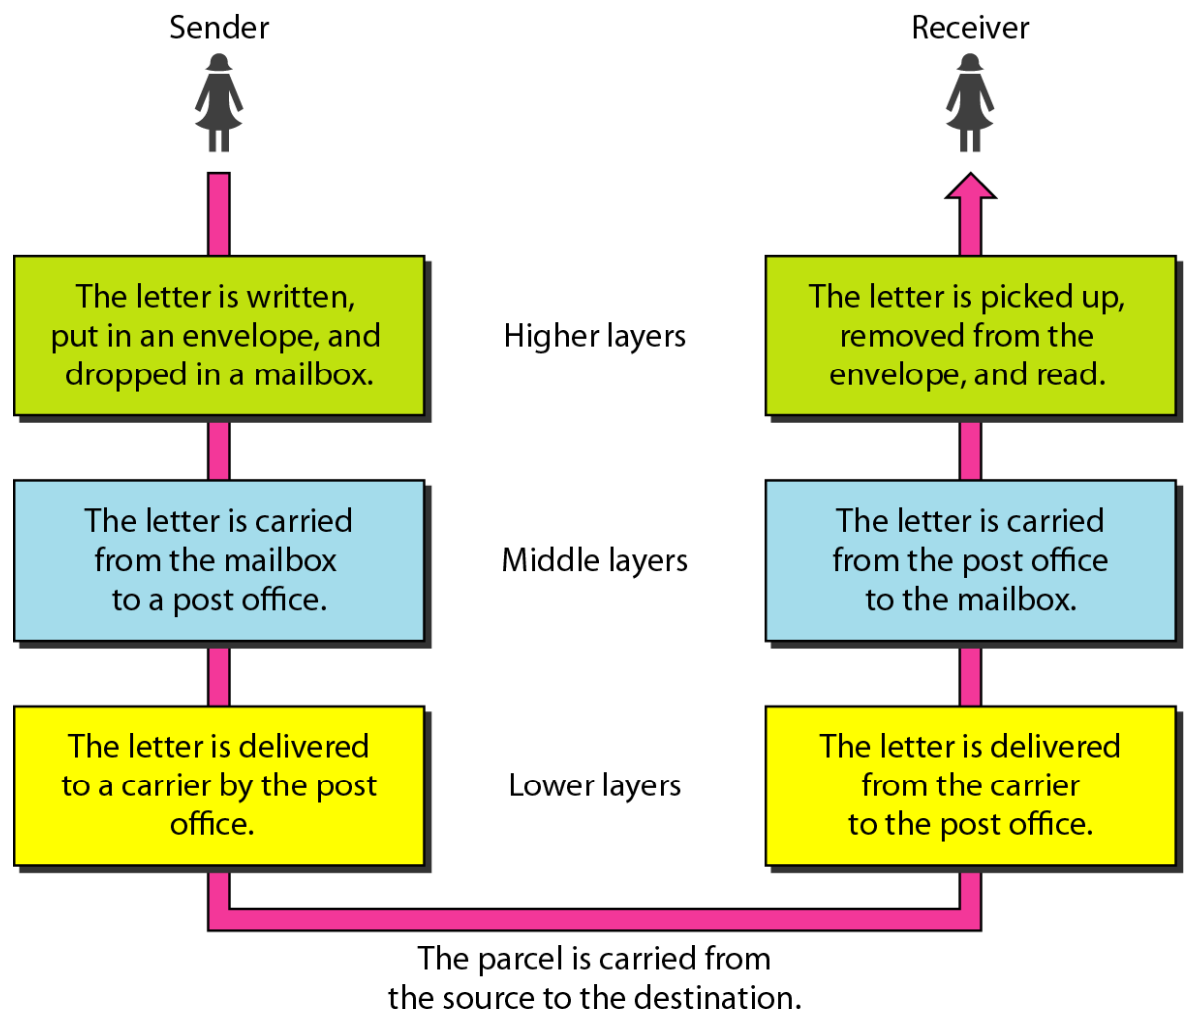
Topics discussed in this section:

Sender, Receiver, and Carrier
Hierarchy

# Figure 2.1 Tasks involved in sending a letter

2-2   THE OSI MODEL

Established in 1947, the International Standards Organization (ISO) is a multinational body dedicated to worldwide agreement on international standards. An ISO standard that covers all aspects of network communications is the Open Systems Interconnection (OSI) model. It was first introduced in the late 1970s.

Topics discussed in this section:

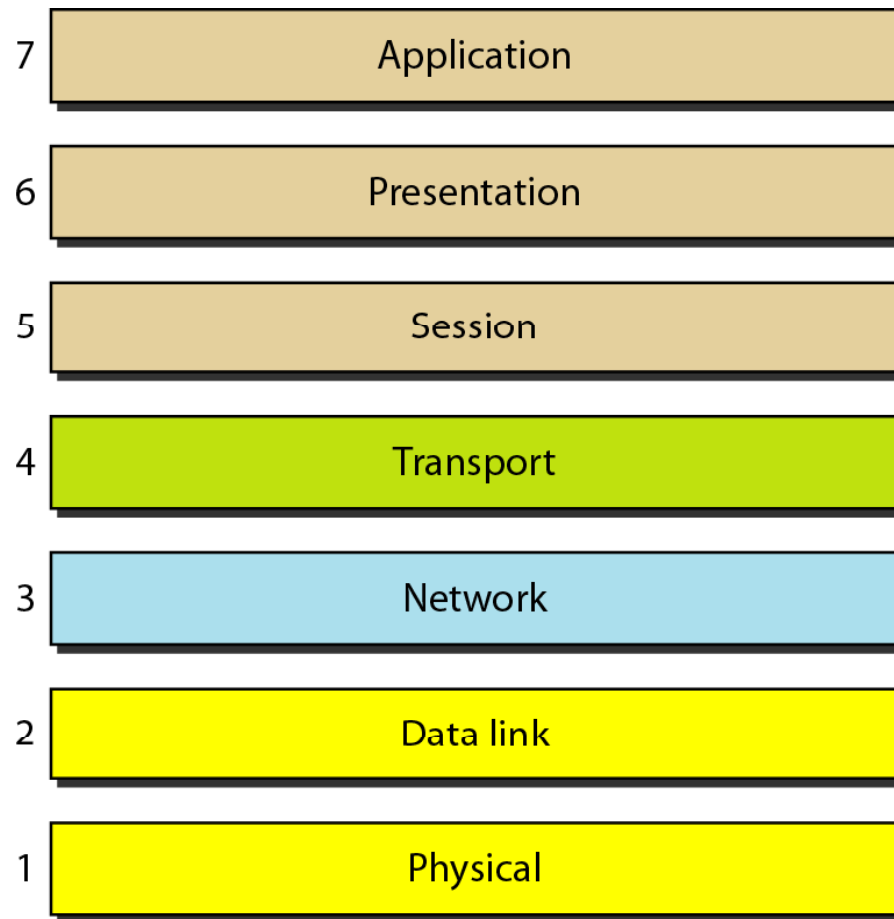**Layered Architecture**
Peer-to-Peer Processes
Encapsulation
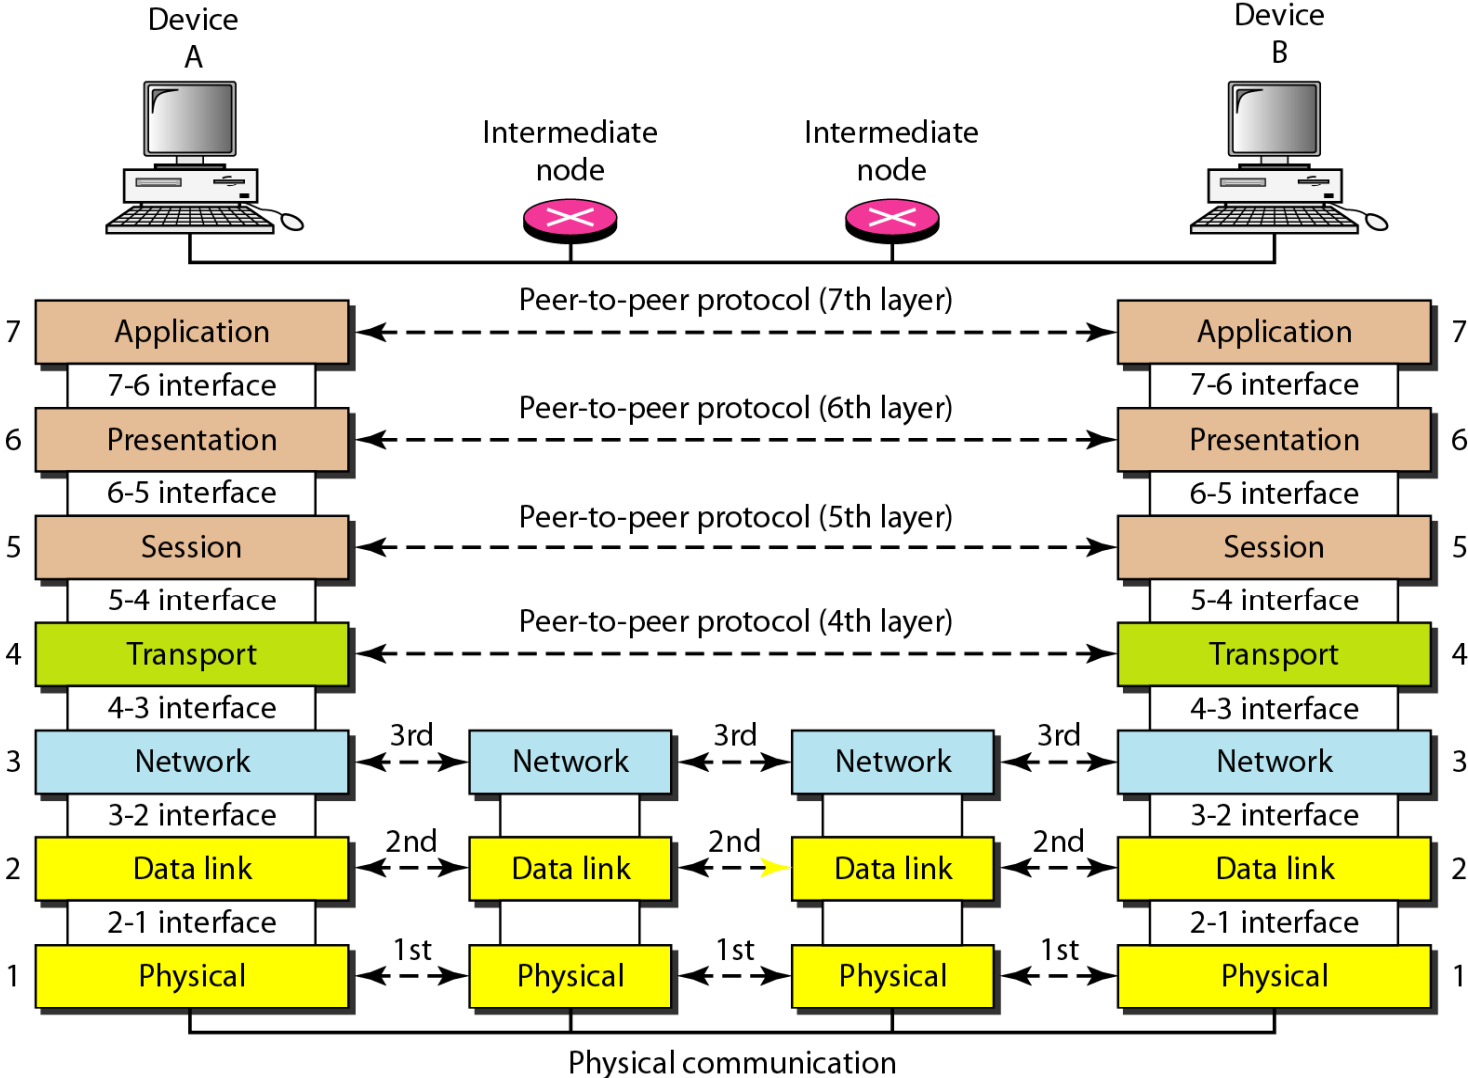
Note

ISO is the organization.
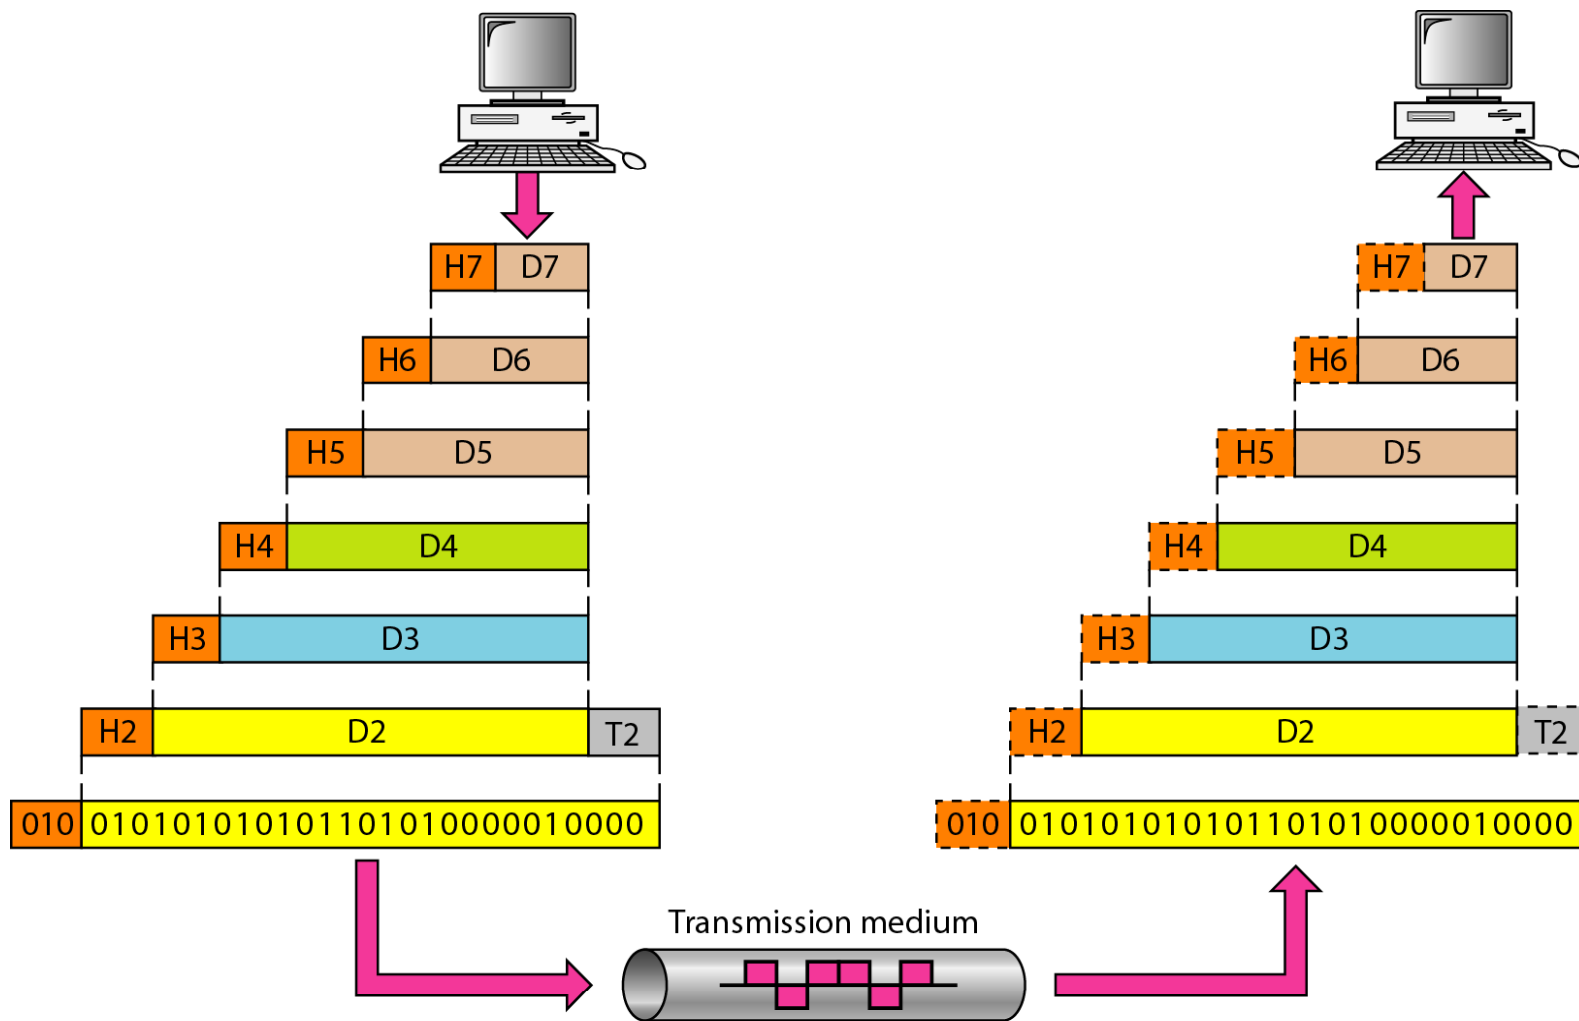OSI is the model.

Figure 2.2 *Seven layers of the OSI model*

7	Application
6	Presentation
5	Session
4	Transport
3	Network
2	Data link
1	Physical

Figure 2.3 *The interaction between layers in the OSI model*

Device
A

Intermediate
node

Intermediate
node

Device
B

Peer-to-peer protocol (7th layer)

| 7 | Application | | Application | 7 |

7-6 interface

Peer-to-peer protocol (6th layer)

7-6 interface

| 6 | Presentation | | Presentation | 6 |

6-5 interface

Peer-to-peer protocol (5th layer)

6-5 interface

| 5 | Session | | Session | 5 |

5-4 interface

Peer-to-peer protocol (4th layer)

5-4 interface

| 4 | Transport | | Transport | 4 |

4-3 interface

4-3 interface

| 3 | Network | 3rd | Network | 3rd | Network | 3rd | Network | 3 |

3-2 interface

3-2 interface

| 2 | Data link | 2nd | Data link | 2nd | Data link | 2nd | Data link | 2 |

2-1 interface

2-1 interface

| 1 | Physical | 1st | Physical | 1st | Physical | 1st | Physical | 1 |

Physical communication

Figure 2.4 *An exchange using the OSI model*

2-3 LAYERS IN THE OSI MODEL

In this section we briefly describe the functions of each layer in the OSI model.

Topics discussed in this section:

Physical Layer
Data Link Layer
Network Layer
Transport Layer
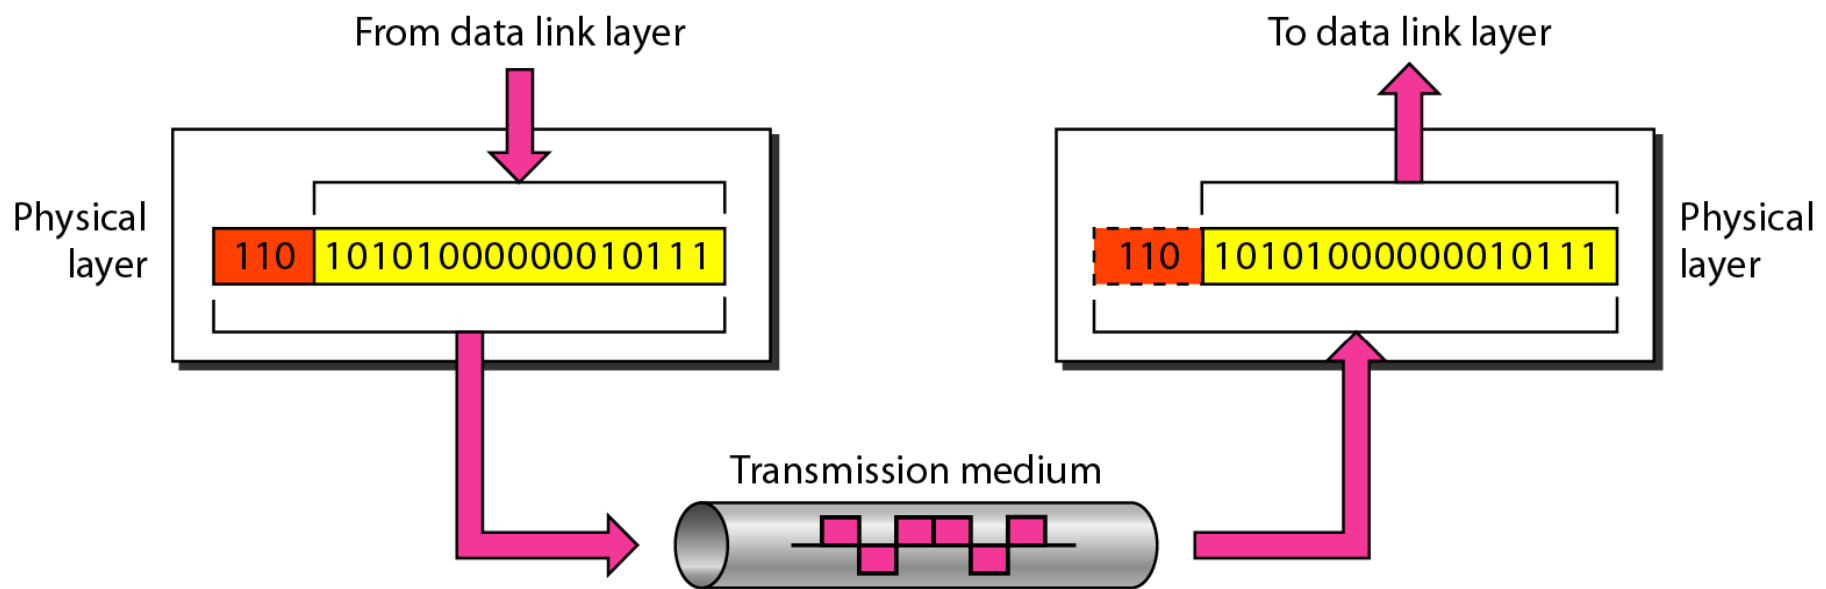Session Layer
Presentation Layer
Application Layer

Physical Layer

- **Provides physical interface for transmission of information.**

- **Defines rules by which bits are passed from one system to another on a physical communication medium.**

- **Covers all - mechanical, electrical, functional and procedural - aspects for physical communication.**

- **Such characteristics as voltage levels, timing of voltage changes, physical data rates, maximum transmission distances, physical connectors, and other similar attributes are defined by physical layer specifications.**

Figure 2.5 *Physical layer*

From data link layer

To data link layer

Physical
layer

110 | 10101000000010111

110 | 10101000000010111

Physical
layer

Transmission medium

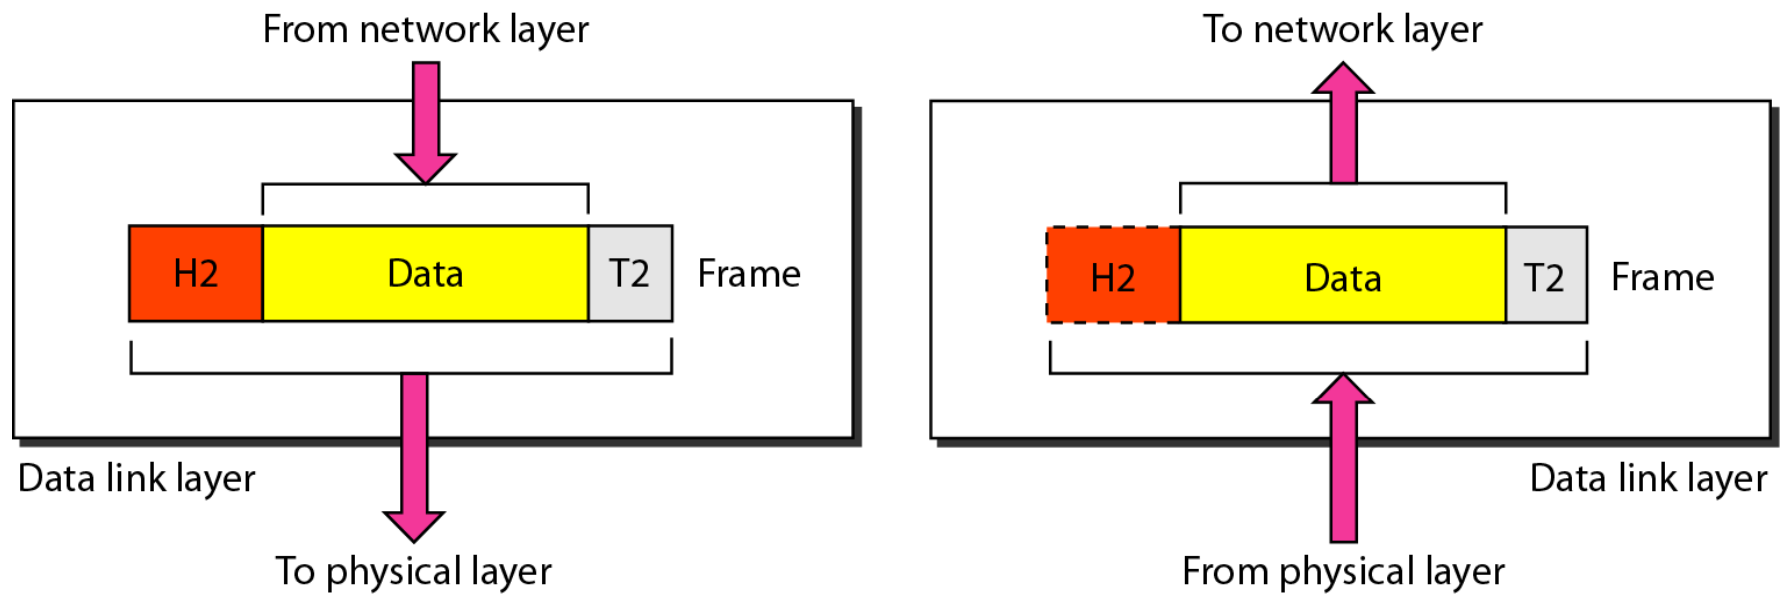The physical layer is responsible for movements of individual bits from one hop (node) to the next.

Data Link Layer

- Data link layer attempts to provide reliable communication over the physical layer interface.

- Breaks the outgoing data into frames and reassemble the received frames.

- Create and detect frame boundaries.

- Handle errors by implementing an acknowledgement and retransmission scheme.

- Implement flow control.

- Supports points-to-point as well as broadcast communication.

- Supports simplex, half-duplex or full-duplex communication.

Figure 2.6 *Data link layer*

Figure 2.7 *Hop-to-hop delivery*
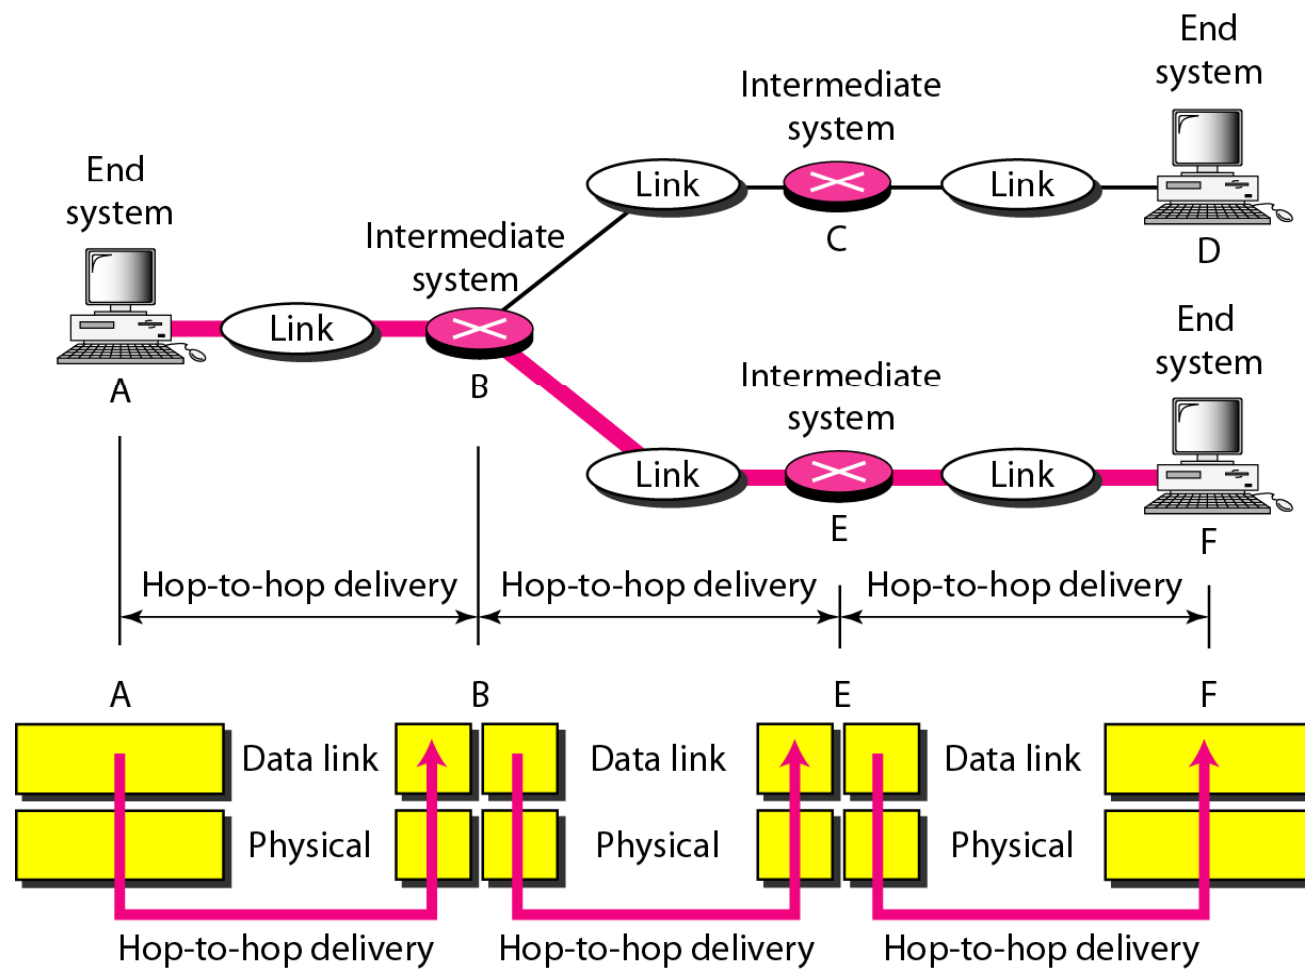
**The data link layer is responsible for moving
frames from one hop (node) to the next.**

Network Layer

- Implements routing of frames (packets) through the network.

- Defines the most optimum path the packet should take from the source to the destination

- Defines logical addressing so that any endpoint can be identified.

- Handles congestion in the network.

- Facilitates interconnection between heterogeneous networks (Internetworking).

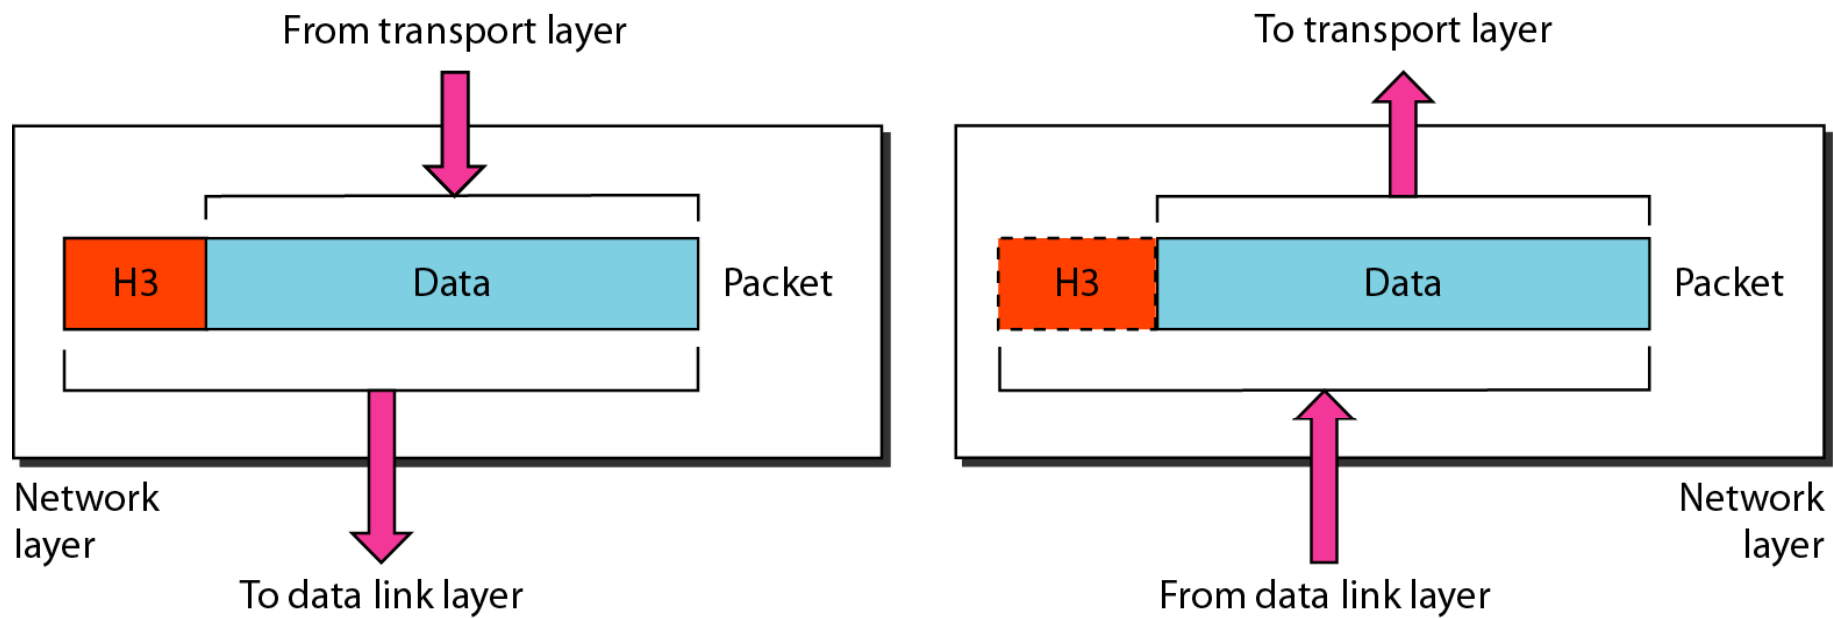- The network layer also defines how to fragment a packet into smaller packets to accommodate different media.

# Figure 2.9 *Source-to-destination delivery*
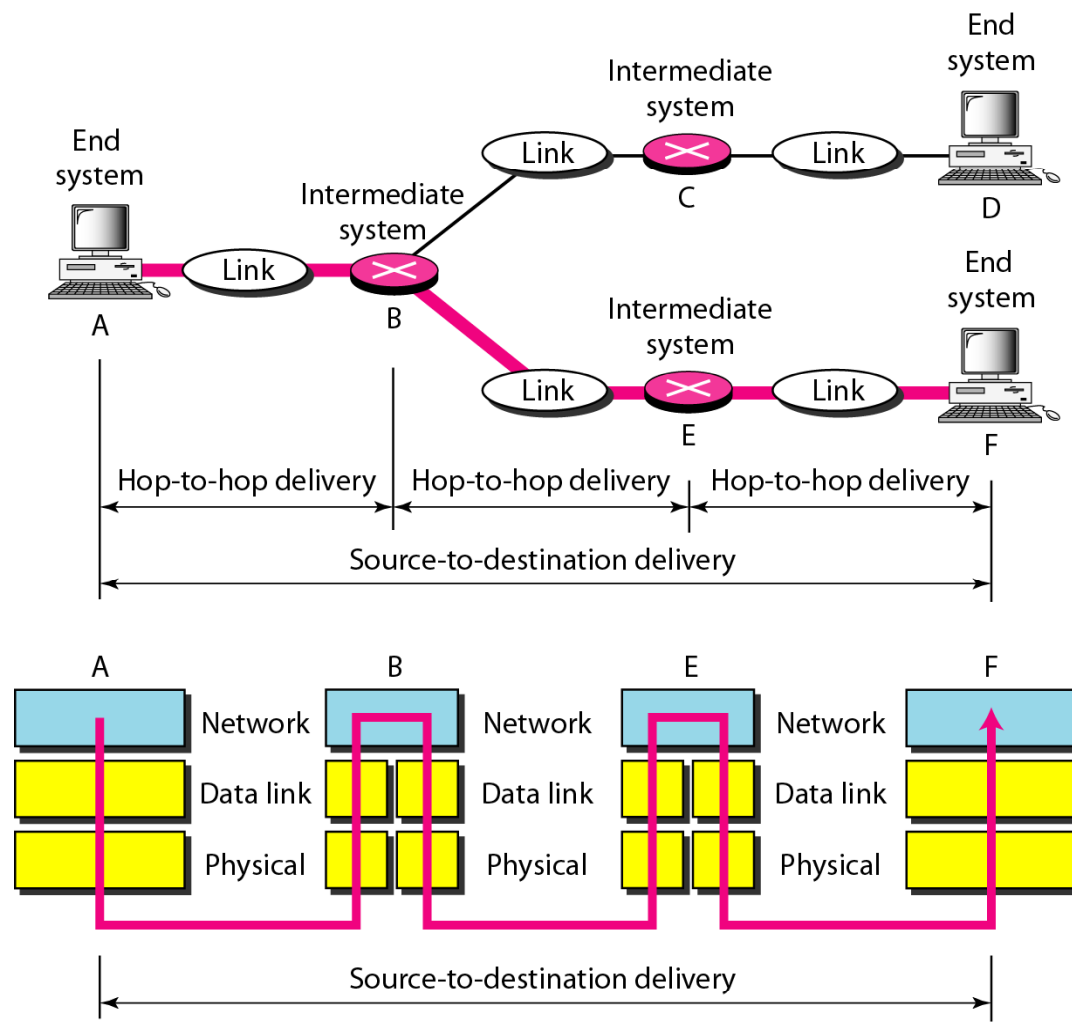
Figure 2.8 *Network layer*

Note

The network layer is responsible for the
delivery of individual packets from
the source host to the destination host.

Transport Layer

- Purpose of this layer is to provide a reliable mechanism for the exchange of data between two processes in different computers.

- Ensures that the data units are delivered error free.

- Ensures that data units are delivered in sequence.

- Ensures that there is no loss or duplication of data units.

- Provides connectionless or connection oriented service.

- Provides for the connection management.
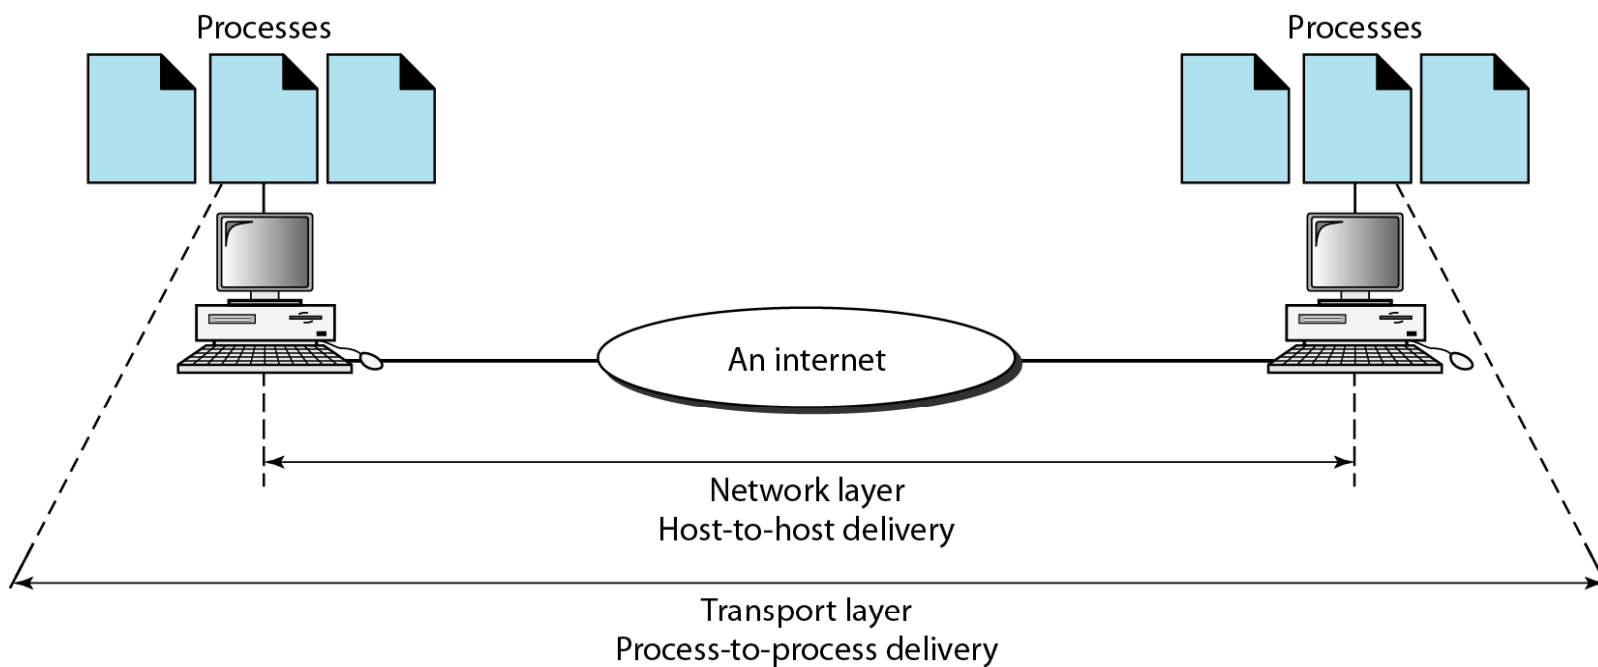
- Multiplex multiple connection over a single channel.

Figure 2.10 *Transport layer*
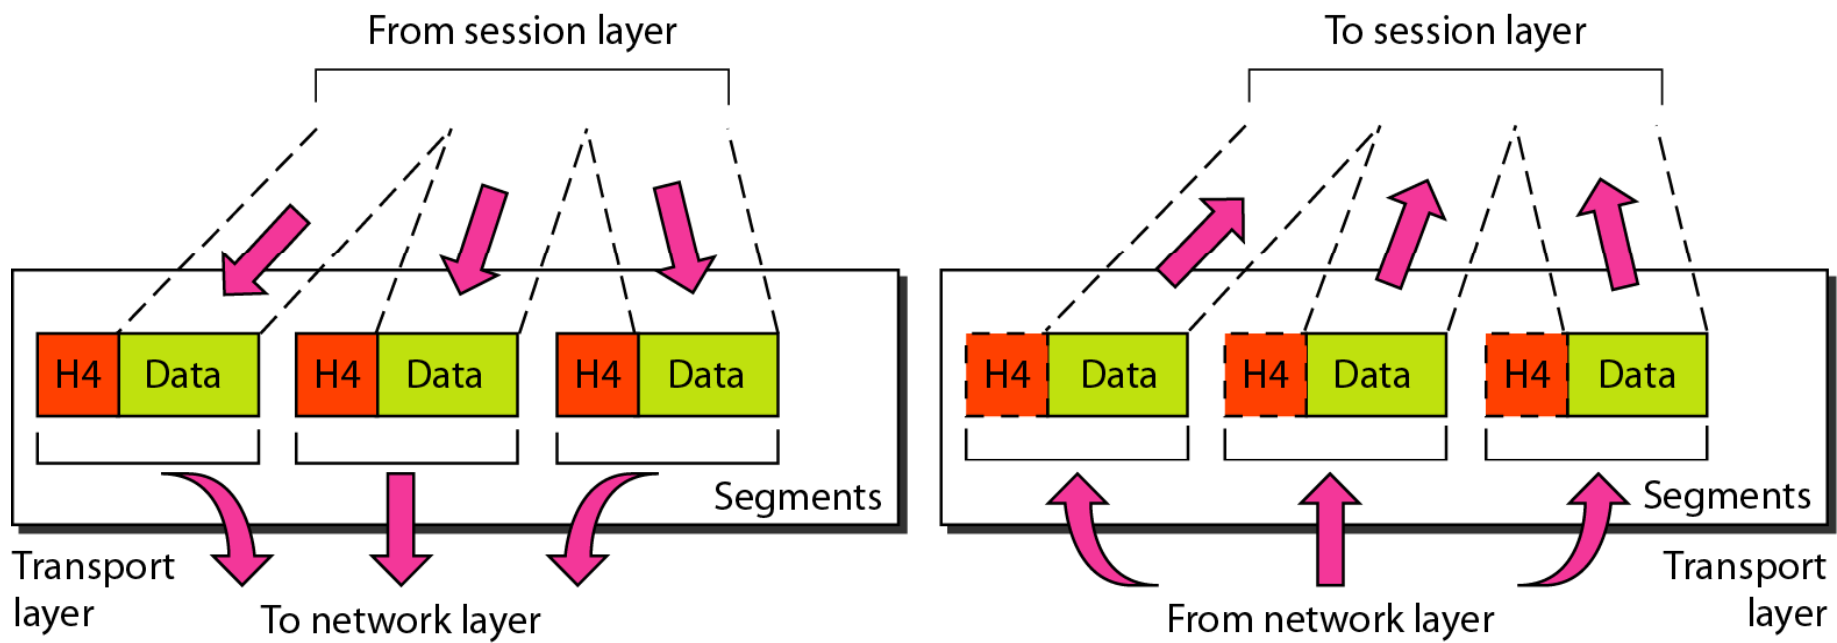
Figure 2.11 *Reliable process-to-process delivery of a message*

Processes

Processes

An internet

Network layer
Host-to-host delivery

Transport layer
Process-to-process delivery

Note

The transport layer is responsible for the delivery
of a message from one process to another.

Session Layer

- Session layer provides mechanism for controlling the dialogue between the two end systems. It defines how to start, control and end conversations (called sessions) between applications.

- This layer requests for a logical connection to be established on an end-user's request.

- Any necessary log-on or password validation is also handled by this layer.

- Session layer is also responsible for terminating the connection.

- This layer provides services like dialogue discipline which can be full duplex or half duplex.

- Session layer can also provide check-pointing mechanism such that if a failure of some sort occurs between checkpoints, all data can be retransmitted from the last checkpoint.

Figure 2.12 *Session layer*
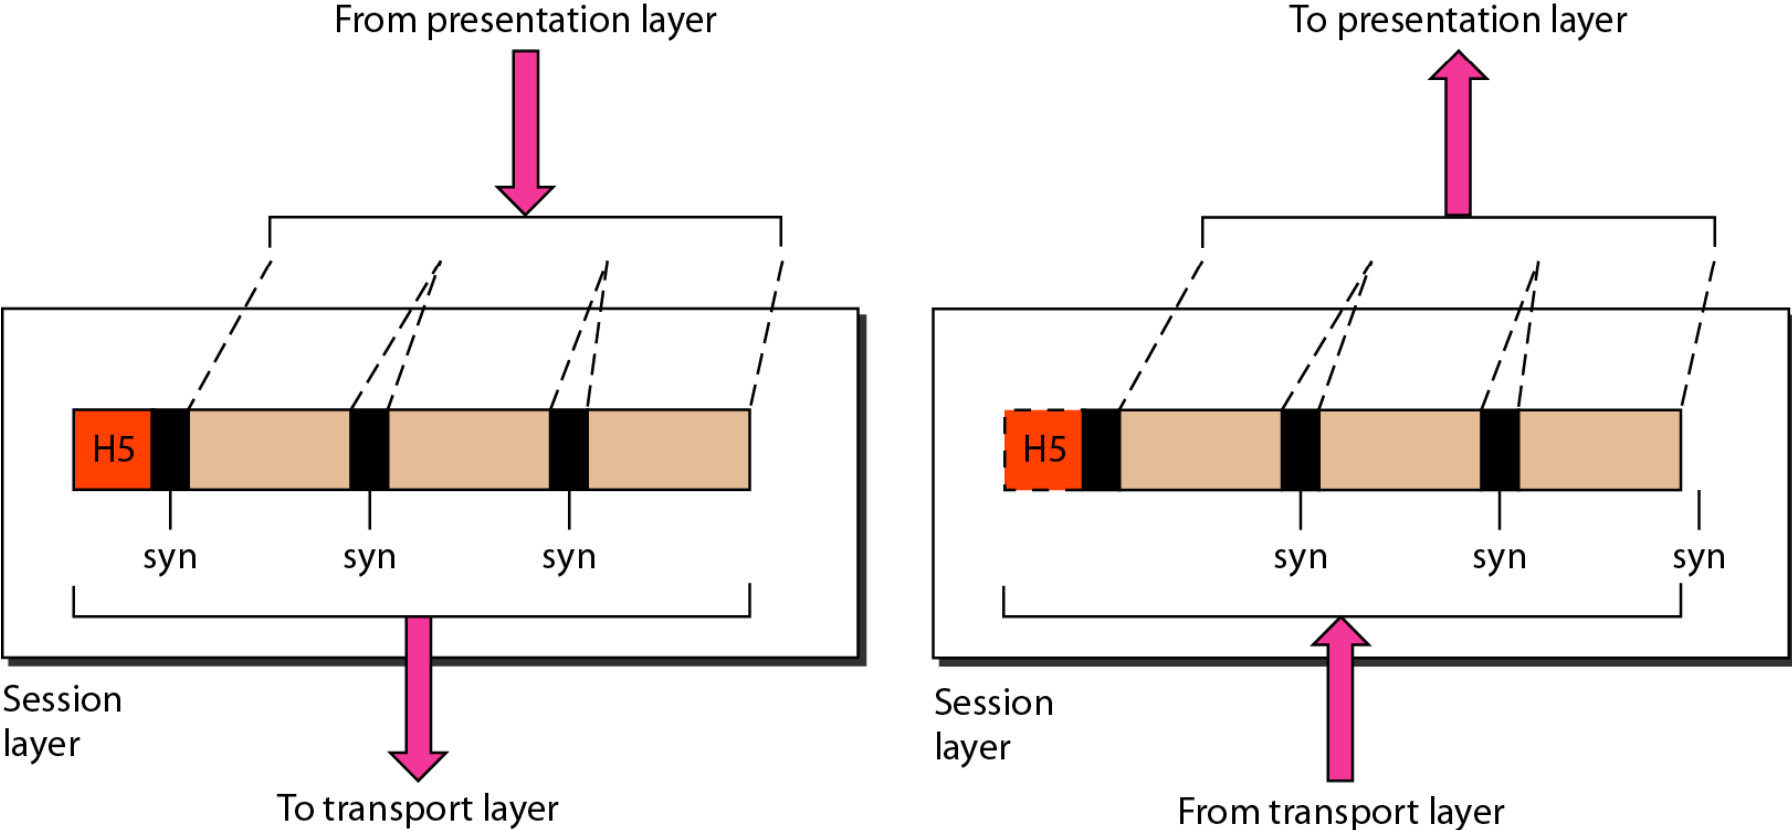
Note

The session layer is responsible for dialog control and synchronization.
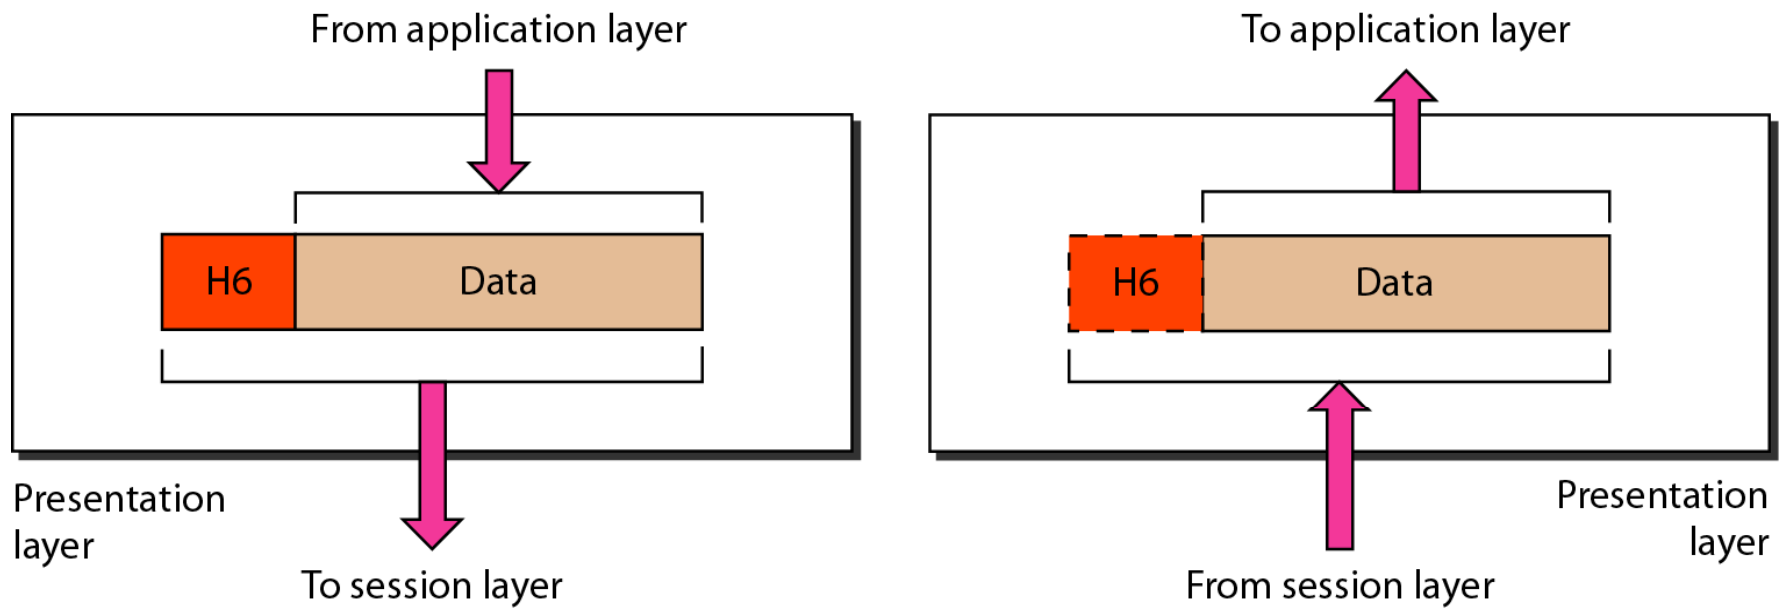
Presentation Layer

- Presentation layer defines the format in which the data is to be exchanged between the two communicating entities.

- Also handles data compression and data encryption (cryptography).
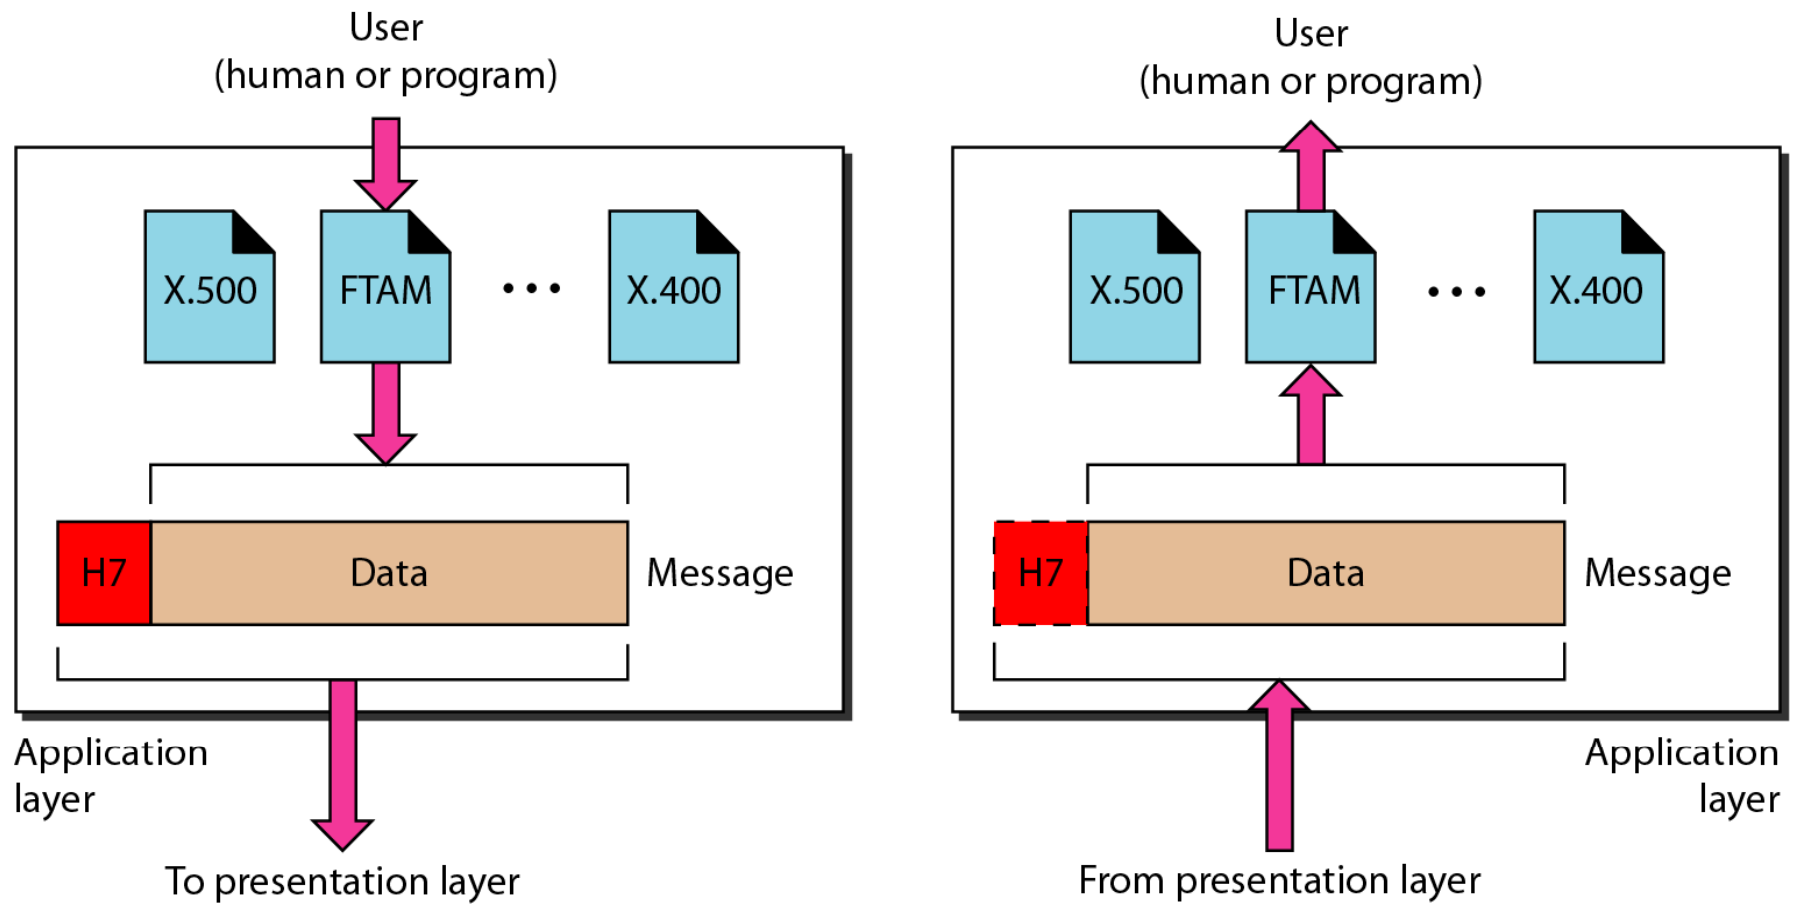
Figure 2.13 *Presentation layer*

Note

The presentation layer is responsible for translation, compression, and encryption.

Figure 2.14 *Application layer*

Application Layer

- Application layer interacts with application programs and is the highest level of OSI model.

- Application layer contains management functions to support distributed applications.

- Examples of application layer are applications such as file transfer, electronic mail, remote login etc.

Note

The application layer is responsible for
providing services to the user.

Figure 2.15 *Summary of layers*

To translate, encrypt, and compress data

To provide reliable process-to-process message delivery and error recovery

To organize bits into frames; to provide hop-to-hop delivery

| Application |
| Presentation |
| Session |
| Transport |
| Network |
| Data link |
| Physical |

To allow access to network resources

To establish, manage, and terminate sessions

To move packets from source to destination; to provide internetworking

To transmit bits over a medium; to provide mechanical and electrical specifications