



Quality of Service

By Nidhi Jindal

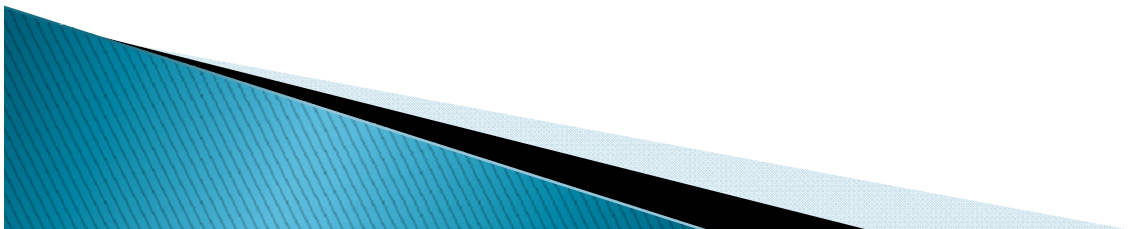


Realtime Applications

- ▶ Require “deliver on time” assurances
 - must come from *inside* the network


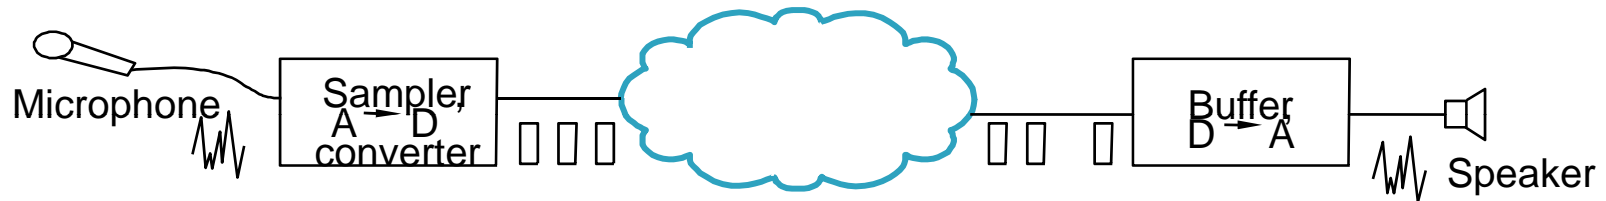


- ▶ Example application (audio)
 - sample voice once every 125us
 - each sample has a *playback time*
 - packets experience variable delay in network
 - add constant factor to playback time: *playback point*


Playback Buffer

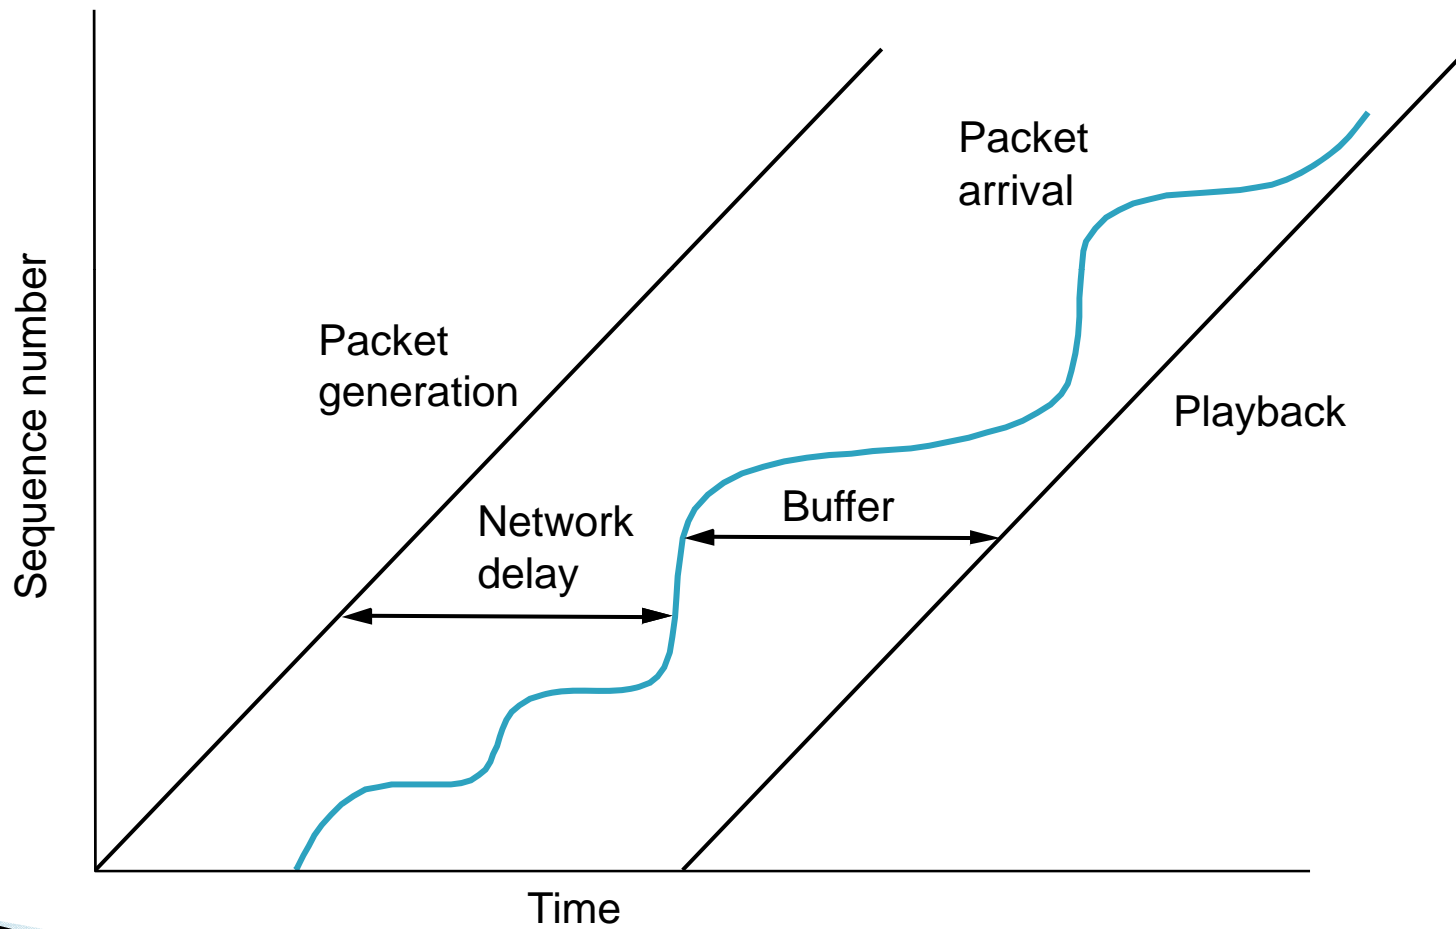

Example Distribution of Delays

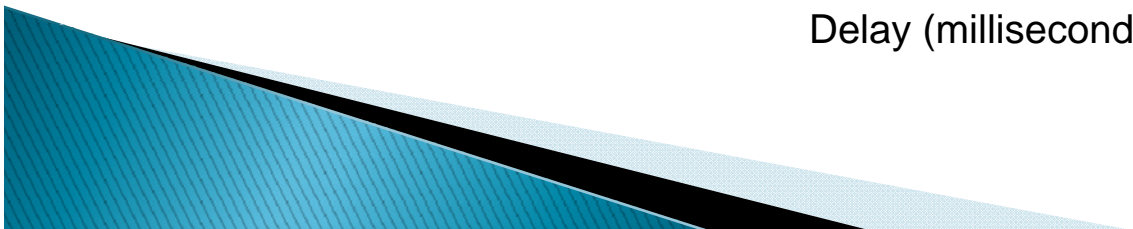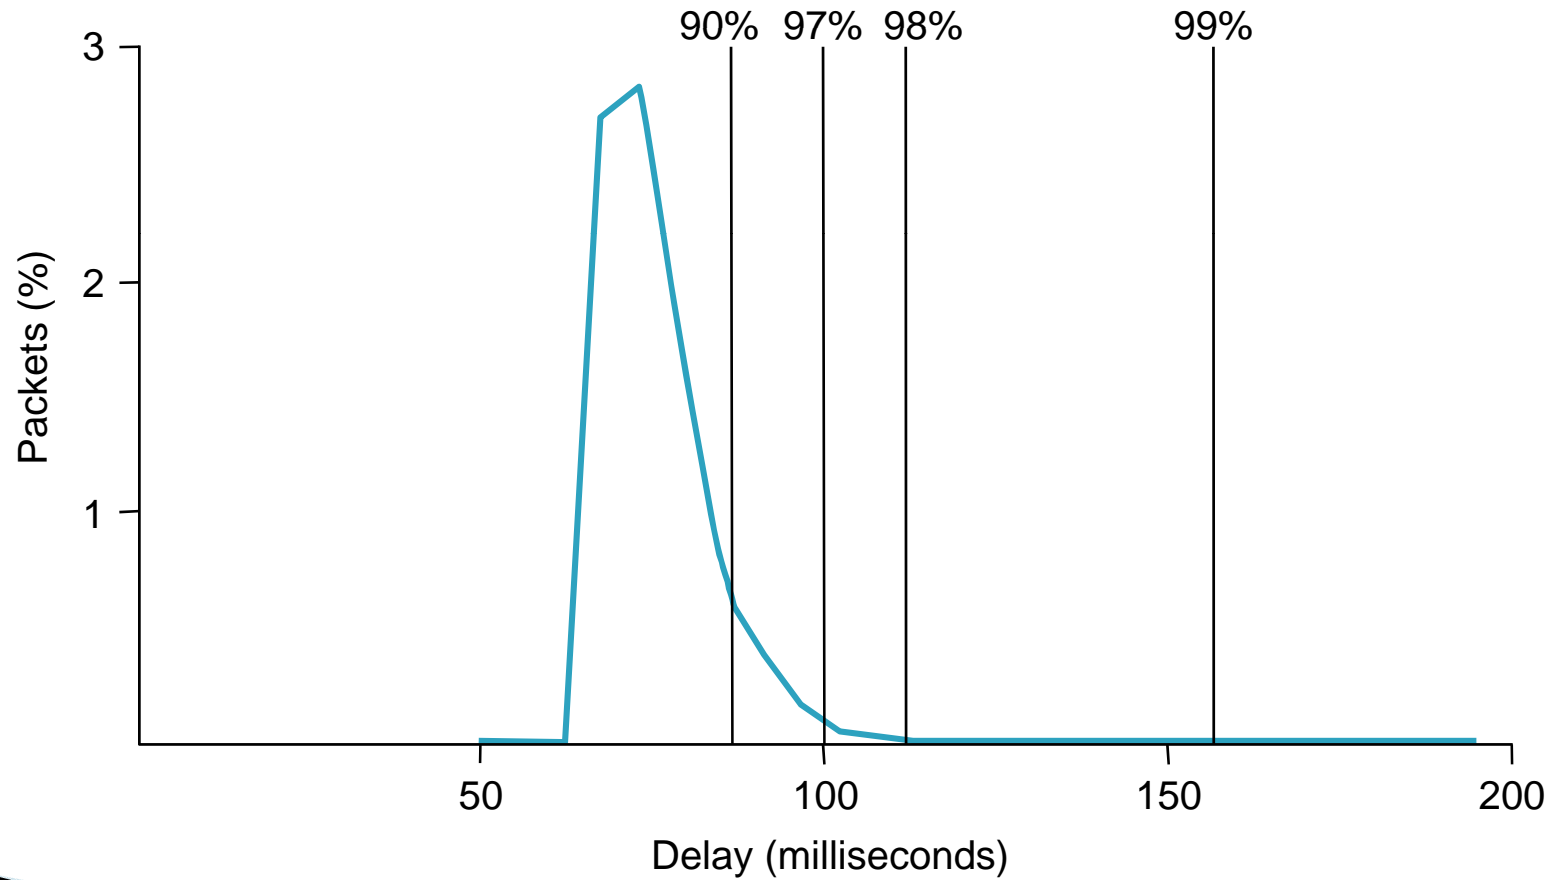


Taxonomy

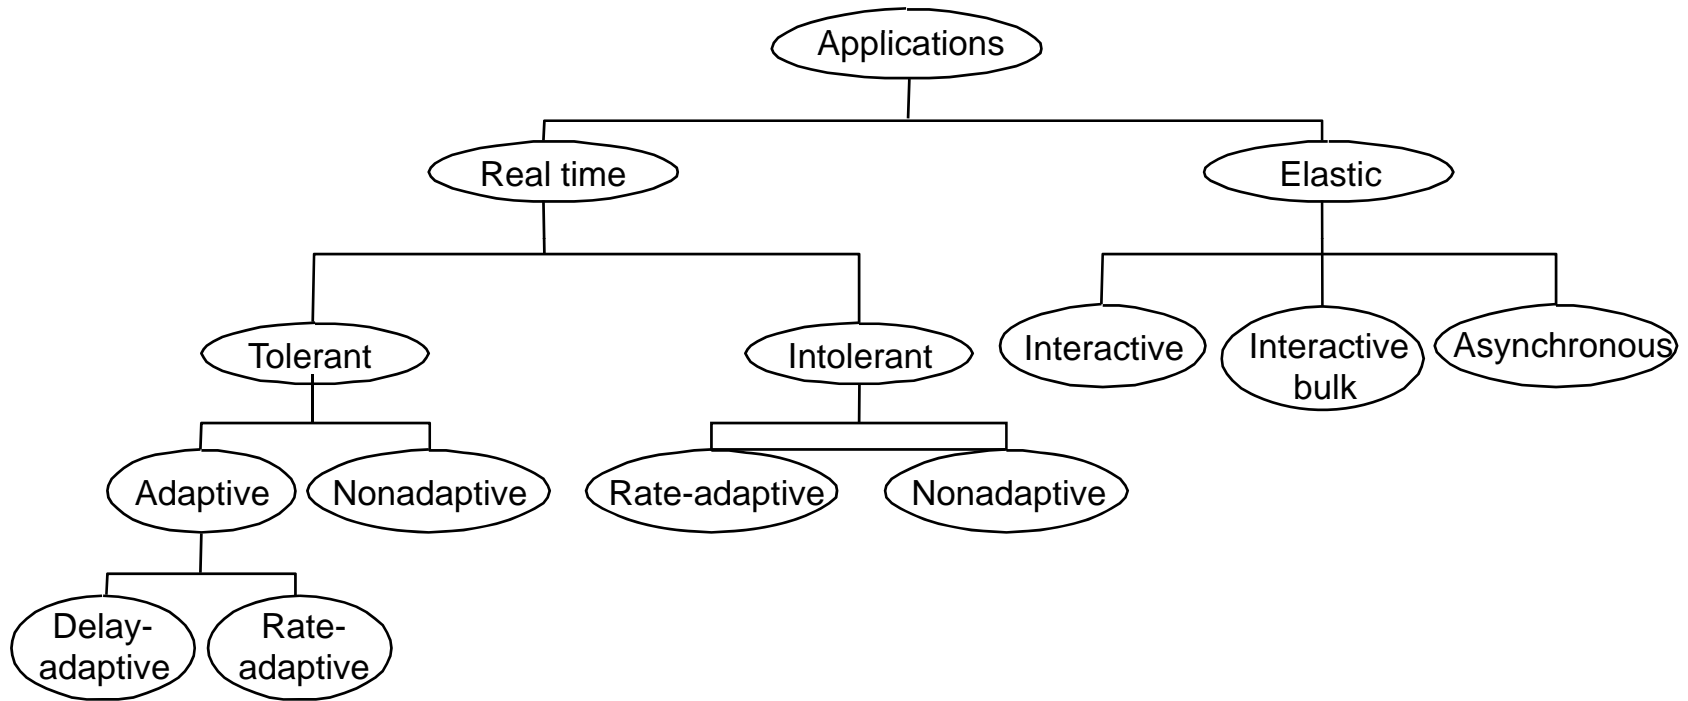

Integrated Services

- ▶ Service Classes
 - guaranteed
 - controlled-load
- ▶ Mechanisms
 - signalling protocol
 - admission control
 - policing
 - packet scheduling

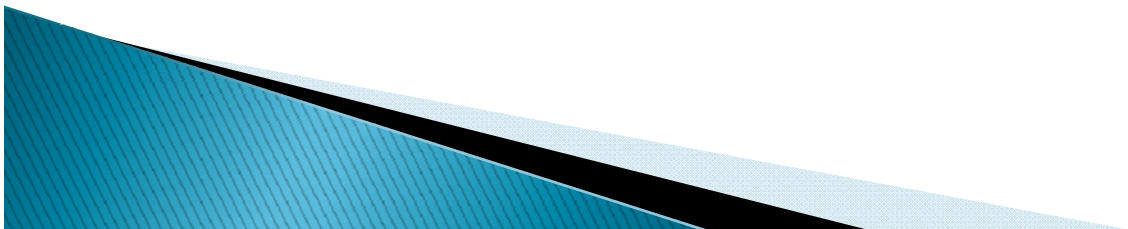


Flowspec

- ▶ *Rspec*: describes service requested from network
 - controlled-load: none
 - guaranteed: delay target
- ▶ *Tspec*: describes flow's traffic characteristics
 - average bandwidth + burstiness: *token bucket* filter
 - token rate r
 - bucket depth B
 - must have a token to send a byte
 - must have n tokens to send n bytes
 - start with no tokens
 - accumulate tokens at rate of r per second
can accumulate no more than B tokens

Per-Router Mechanisms


- ▶ Admission Control
 - decide if a new flow can be supported
 - answer depends on service class
 - not the same as *policing*
- ▶ Packet Processing
 - classification: associate each packet with the appropriate reservation
 - scheduling: manage queues so each packet receives the requested service

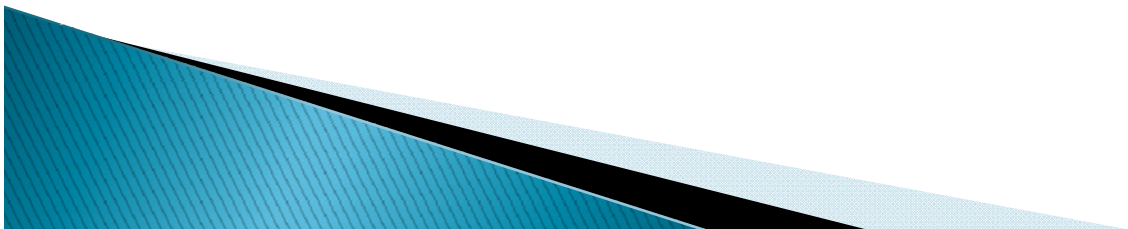

Reservation Protocol

- ▶ Called signaling in ATM
- ▶ Proposed Internet standard: RSVP
- ▶ Consistent with robustness of today's connectionless model
- ▶ Uses soft state (refresh periodically)
- ▶ Designed to support multicast
- ▶ Receiver-oriented
- ▶ Two messages: PATH and RESV
- ▶ Source transmits PATH messages every 30 seconds
- ▶ Destination responds with RESV message
- ▶ Merge requirements in case of multicast
- ▶ Can specify number of speakers

RSVP Example

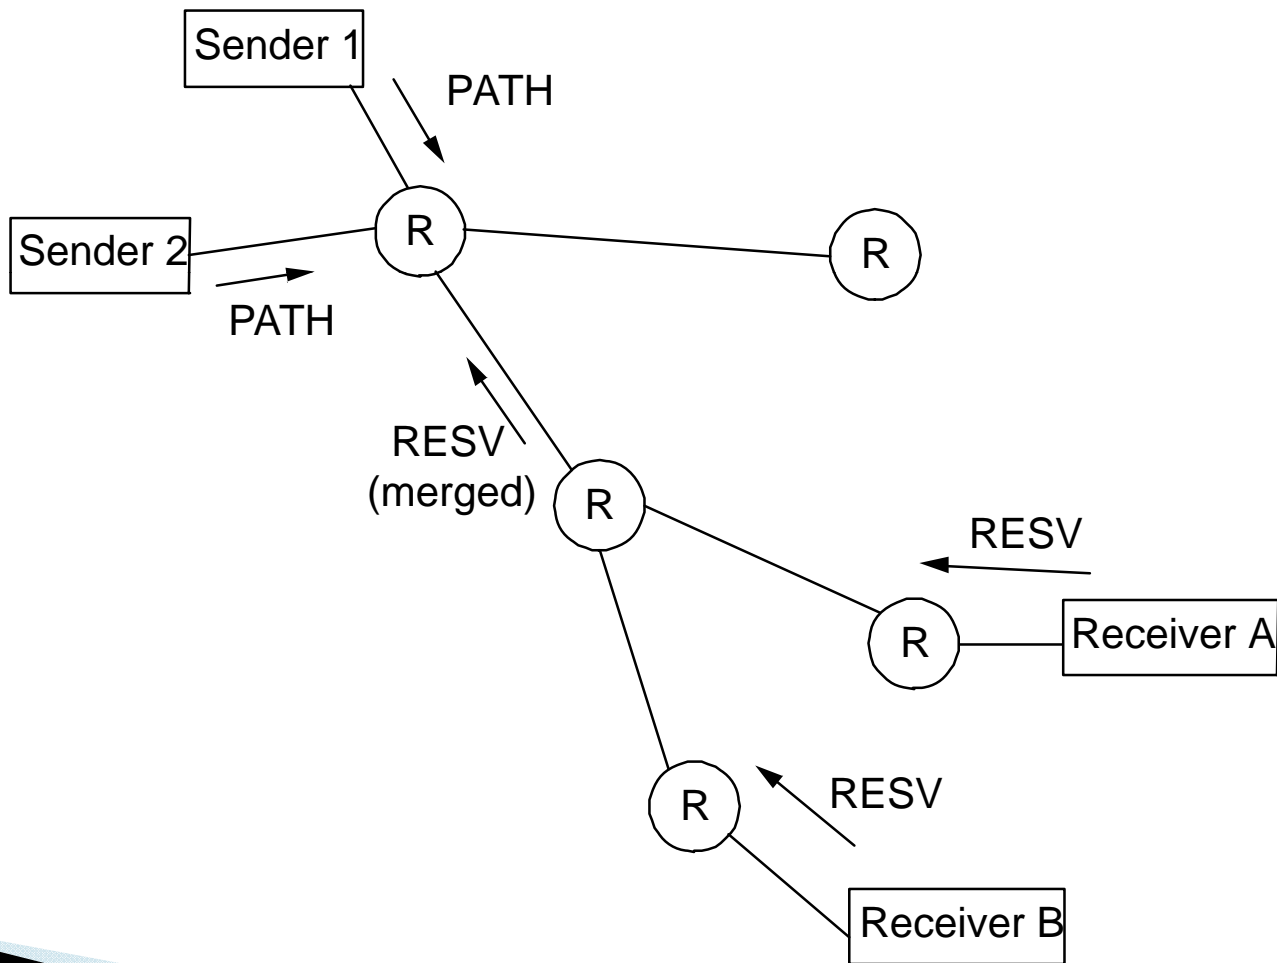


RSVP versus ATM (Q.2931)

▶ RSVP

- receiver generates reservation
- soft state (refresh/timeout)
- separate from route establishment
- QoS can change dynamically
- receiver heterogeneity


▶ ATM

- sender generates connection request
- hard state (explicit delete)
- concurrent with route establishment
- QoS is static for life of connection
- uniform QoS to all receivers

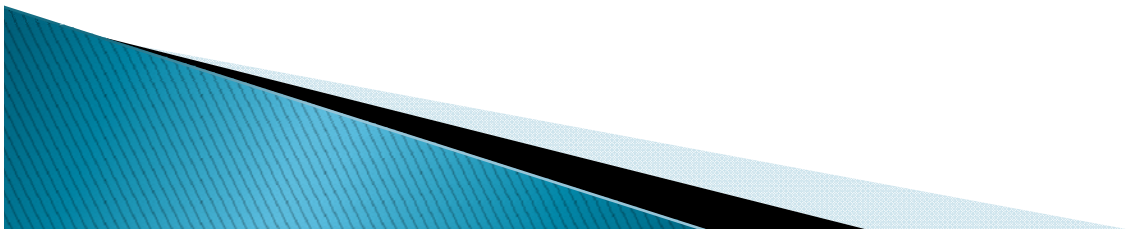


Differentiated Services

- ▶ Problem with IntServ: scalability
- ▶ Idea: segregate packets into a small number of classes
 - e.g., premium vs best-effort
- ▶ Packets marked according to class at edge of network
- ▶ Core routers implement some per-hop-behavior (PHB)
- ▶ Example: Expedited Forwarding (EF)
 - rate-limit EF packets at the edges
 - PHB implemented with class-based priority queues or WFQ

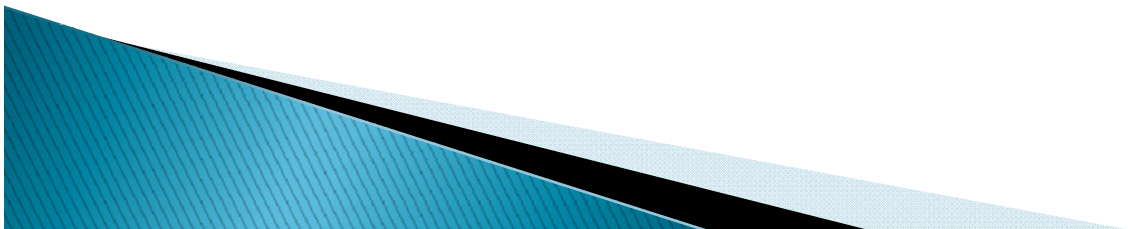


DiffServ (cont)

- ▶ Assured Forwarding (AF)
 - customers sign service agreements with ISPs
 - edge routers mark packets as being “in” or “out” of profile
 - core routers run RIO: RED with in/out

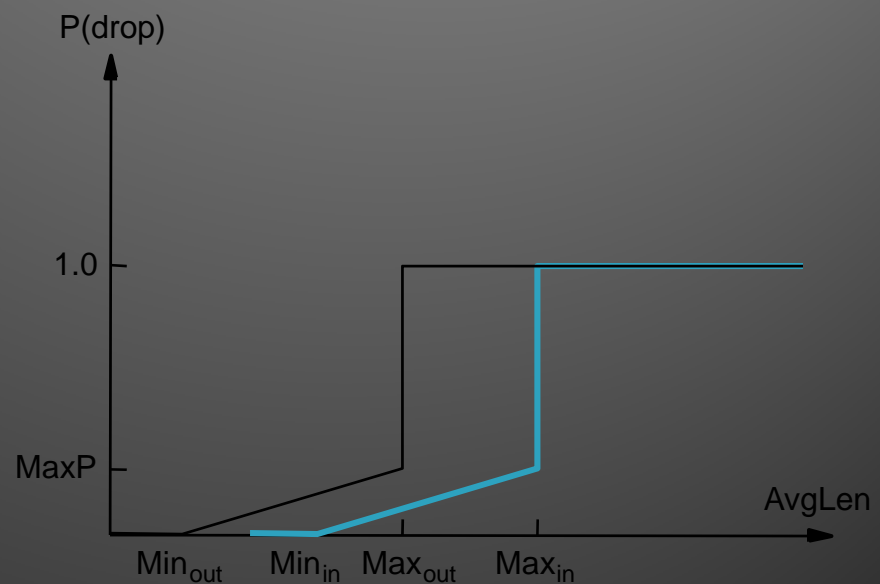


Scope of Research

- ▶ Qos Issues
- ▶ Differentiated services in IPv6
- ▶ Qos in Wireless networks
- ▶ Qos in Mobile Networks

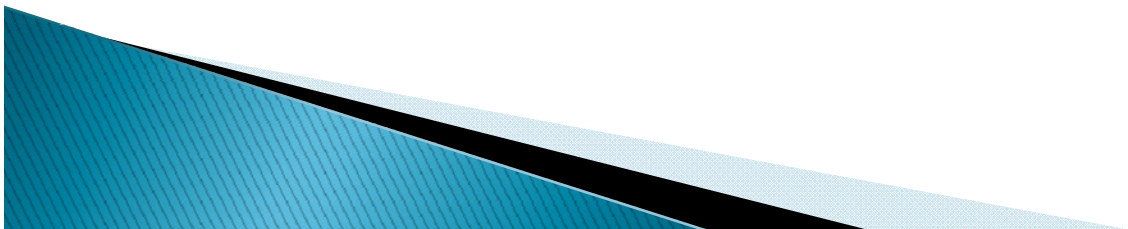

Assignment 30

- ▶ What do you mean by Quality of service?
- ▶ Which field in IPv4 and IPv6 header is used for specifying classes of service?

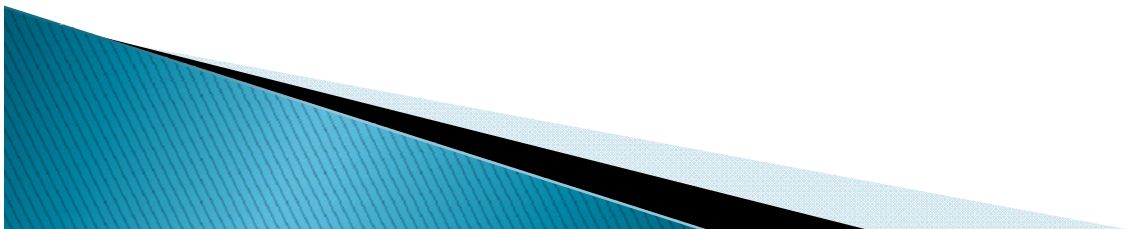

THANKYOU

