


Introduction



Circle is a frequently used component in pictures and graphs. The procedure for generating either full circles or circular arcs is included in most graphics packages.



Polar co-ordinates for a circle

- We could use polar coordinates r and θ ,

$$x = x_c + r \cos\theta \quad y = y_c + r \sin\theta$$

- A fixed angular step size can be used to plot equally spaced points along the circumference
- A step size of $1/r$ can be used to set pixel positions to approximately 1 unit apart for a continuous boundary
- But, note that circle sections in adjacent octants within one quadrant are symmetric with respect to the 45 deg line dividing the two octants
- Thus we can generate all pixel positions around a circle by calculating just the points within the sector from $x=0$ to $x=y$
- **This method is still computationally expensive**

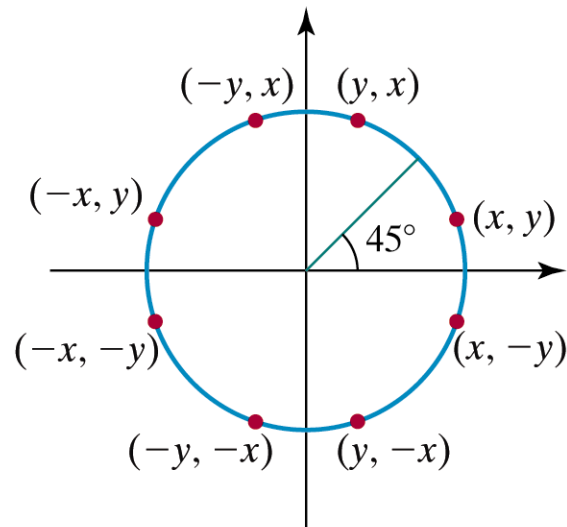


Figure 3-18

Symmetry of a circle. Calculation of a circle point (x, y) in one octant yields the circle points shown for the other seven octants.

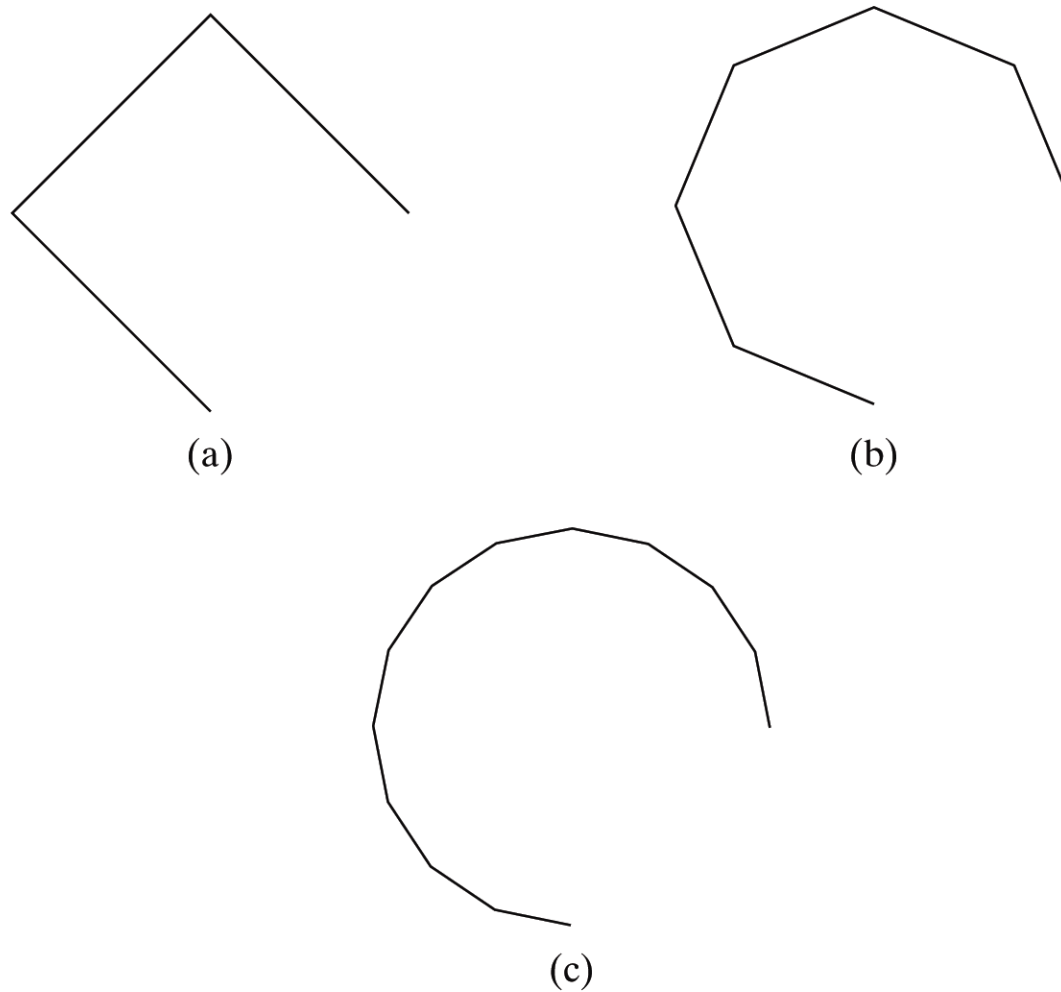


Figure 3-15

A circular arc approximated with (a) three straight-line segments, (b) six line segments, and (c) twelve line segments.



Bresenham to Midpoint

- Bresenham requires explicit equation
 - Not always convenient (many equations are implicit)
 - Based on implicit equations: Midpoint Algorithm (circle, ellipse, etc.)
 - Implicit equations have the form $F(x,y)=0$.



Midpoint Circle Algorithm

- We will first calculate pixel positions for a circle centered around the origin (0,0). Then, each calculated position (x,y) is moved to its proper screen position by adding xc to x and yc to y
- Note that along the circle section from x=0 to x=y in the first octant, the slope of the curve varies from 0 to -1
- Circle function around the origin is given by
$$f_{\text{circle}}(x,y) = x^2 + y^2 - r^2$$
- Any point (x,y) on the boundary of the circle satisfies the equation and circle function is zero


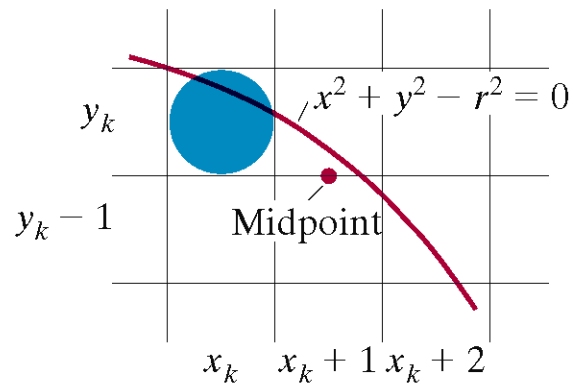


Figure 3-19

Midpoint between candidate pixels at sampling position $x_k + 1$ along a circular path.

Midpoint Circle Algorithm

- For a point in the interior of the circle, the circle function is negative and for a point outside the circle, the function is positive
- Thus,
 - $f_{\text{circle}}(x,y) < 0$ if (x,y) is inside the circle boundary
 - $f_{\text{circle}}(x,y) = 0$ if (x,y) is on the circle boundary
 - $f_{\text{circle}}(x,y) > 0$ if (x,y) is outside the circle boundary

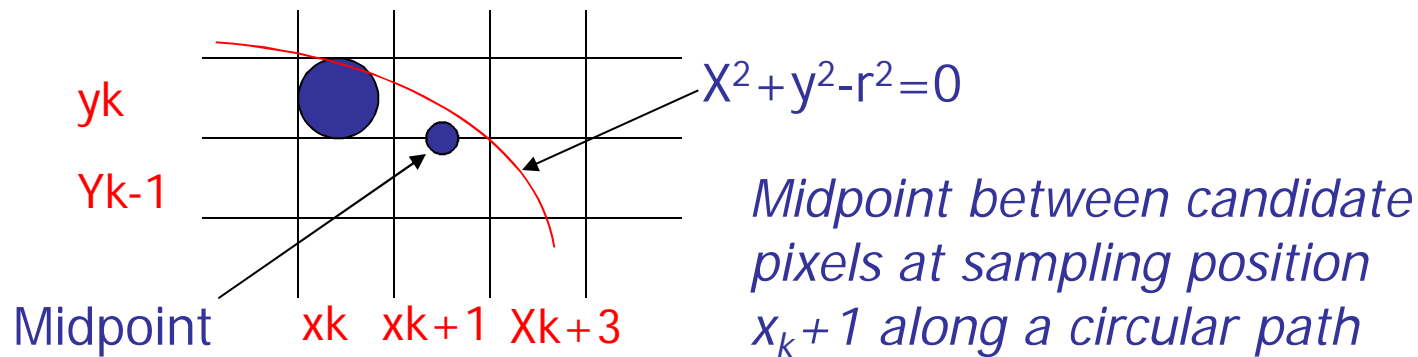



Midpoint Circle Algorithm

- Assuming we have just plotted the pixel at (x_k, y_k) , we next need to determine whether the pixel at position $(x_k + 1, y_k - 1)$ is closer to the circle
- Our decision parameter is the circle function evaluated at the midpoint between these two pixels

$$p_k = f_{circle}(x_k + 1, y_k - 1/2) = (x_k + 1)^2 + (y_k - 1/2)^2 - r^2$$

If $p_k < 0$, this midpoint is inside the circle and the pixel on the scan line y_k is closer to the circle boundary. Otherwise, the mid position is outside or on the circle boundary, and we select the pixel on the scan line $y_k - 1$



Midpoint Circle Algorithm

- Successive decision parameters are obtained using incremental calculations

$$\begin{aligned}P_{k+1} &= f_{\text{circle}}(x_{k+1}+1, y_{k+1}-1/2) \\ &= [(x_{k+1})+1]^2 + (y_{k+1}-1/2)^2 - r^2\end{aligned}$$

OR

$$P_{k+1} = P_k + 2(x_{k+1}) + (y_{k+1}^2 - y_k^2) - (y_{k+1} - y_k) + 1$$

Where y_{k+1} is either y_k or y_{k-1} , depending on the sign of p_k

- Increments for obtaining P_{k+1} :

$2x_{k+1}+1$ if p_k is negative

$2x_{k+1}+1-2y_{k+1}$ otherwise



Midpoint circle algorithm

- Note that following can also be done incrementally:

$$2x_{k+1} = 2x_k + 2$$

$$2y_{k+1} = 2y_k - 2$$

- At the start position $(0, r)$, these two terms have the values 2 and $2r-2$ respectively
- Initial decision parameter is obtained by evaluating the circle function at the start position $(x_0, y_0) = (0, r)$

$$p_0 = f_{circle}(1, r-1/2) = 1 + (r-1/2)^2 - r^2$$

OR

$$P_0 = 5/4 - r$$

- If radius r is specified as an integer, we can round p_0 to

$$p_0 = 1 - r$$



The actual algorithm

1: Input radius r and circle center (x_c, y_c) and obtain the first point on the circumference of the circle centered on the origin as

$$(x_0, y_0) = (0, r)$$

2: Calculate the initial value of the decision parameter as

$$P_0 = 5/4 - r$$

3: At each x_k position starting at $k = 0$, perform the following test:

If $p_k < 0$, the next point along the circle centered on $(0,0)$ is (x_{k+1}, y_k) and

$$p_{k+1} = p_k + 2x_{k+1} + 1$$



The algorithm

Otherwise the next point along the circle is (x_{k+1}, y_{k-1}) and

$$p_{k+1} = p_k + 2x_{k+1} + 1 - 2y_{k+1}$$

Where $2x_{k+1} = 2x_{k+2}$ and $2y_{k+1} = 2y_k - 2$

4: Determine symmetry points in the other seven octants

5: Move each calculated pixel position (x, y) onto the circular path centered on (x_c, y_c) and plot the coordinate values

$$x = x + x_c, \quad y = y + y_c$$

6: Repeat steps 3 through 5 until $x \geq y$



Application

- It is used to draw circle efficiently without any error.