


# Motivation

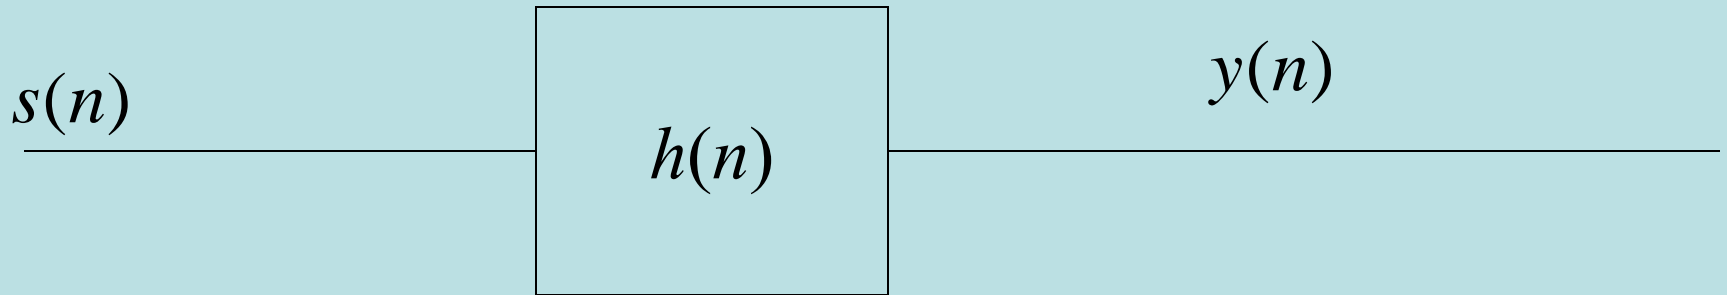

$$y(n) = x(n) * h(n)$$

Fast convolution --- compute convolution using FFT

# Outline

- Fast convolution of short sequences;
- Fast convolution of long sequences.

# Convolution of short sequences

- *Let  $x(n)$  be length  $L$ , ( $n=0, 1, \dots, L-1$ );*
- *$h(n)$  be length  $M$ , ( $n=0, 1, \dots, M-1$ );*
- *$y(n)$  should have  $L+M-1$  samples, given by:*

$$y(n) = x(n) * h(n) = \sum_{m=0}^{N-1} h(m)x(n-m)$$

Where  $n=0, 1, \dots, N$  ( $N=L+M-1$ )

**This equation is referred to as linear convolution**

# Convolution of short sequences

- *Total computations (Assume  $M < L$ )*
  - $n=0$ , 1 multiplication
  - $n=1$ , 2 multiplications and 1 addition;
  - $n=2$ , 3 multiplications and 2 additions;
  - ...
  - if  $M-1 \leq n \leq L-1$ ,  $M$  multiplications, ...
  - ....
  - $n=L+M-2$ , 1 multiplication and no addition
  - **Hence,  $ML$  multiplications for convolving  $x(n)$  and  $H(n)$**


# Convolution of short sequences

- Let us see if DFT can be used for computing the convolution.
- As the length of  $x(n), h(n)$  and  $y(n)$  are  $L, M$  and  $(L+M-1)$  respectively, we consider  $N$ -point DFTs of them, where  $N > L+M-1$ :

$$X(k) = \sum_{n=0}^{L-1} x(n)W_N^{nk}, \quad H(k) = \sum_{n=0}^{M-1} h(n)W_N^{nk}$$

$$Y(k) = \sum_{n=0}^{L+M-1} y(n)W_N^{nk}$$

# Convolution of short sequences
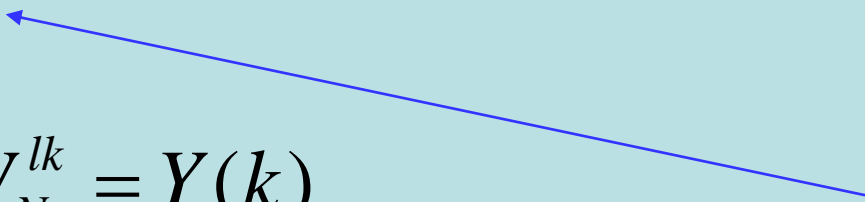
$$\begin{aligned} X(k)H(k) &= \sum_{n=0}^{L-1} x(n)W_N^{nk} \sum_{m=0}^{M-1} h(m)W_N^{mk} \\ &= \sum_{n=0}^{L-1} \sum_{m=0}^{M-1} x(n)h(m)W_N^{(n+m)k} \leftarrow \text{let } n+m=l \\ &= \sum_{l=0}^{L+M-1} \sum_{m=0}^{M-1} x(l-m)h(m)W_N^{lk} \\ &= \sum_{l=0}^{L+M-1} y(l)W_N^{lk} = Y(k) \end{aligned}$$


# Convolution of short sequences

Hence convolution can be computed via DFT's:

- Step 1.

Compute N-point DFT of  $x(n)$  and  $h(n)$ , where  $N > L + M - 1$

- Step 2.

Compute  $Y(k) = X(k)H(k)$

- Step 3.

Compute N-point IDFT of  $Y(k)$  to get  $y(n)$

# Convolution of short sequences: Is it more efficient to use DFTs?

- Multiplications:  $(1/2)N\log N$  for each FFT and IFFT. Hence  $(3/2) N\log N + N$  complex multiplications are required; where  $N \geq L+M-1$
- The direct convolution involves  $ML$  real multiplications;
- Which one is more efficient? FFT is more efficient when  $L$  and  $M$  are large.
- For example: when  $L=M$  .....



# Circular convolution

- Note that  $N$  must be bigger than  $L+M-1$ . Otherwise the result will not be correct. Why?
- Naturally multiplication in frequency domain is equivalent to circular convolution.
- If  $N < L+M-1$ , the circular convolution will involve overlaps .

# Circular convolution

- Circular convolution of  $x(n)$  and  $h(n)$  is defined as the convolution of  $h(n)$  with a periodic signal  $x_p(n)$  :

$$y_p(n) = x_p(n) * h(n)$$

where

$$x_p(n) = x(n \bmod N), \quad -\infty < n < \infty$$

# Circular Convolution

$x(n)$  length  $N$



\*

$h(n)$  length  $M$



# Circular Convolution

$x(n)$  length  $N$




\*


$h(n)$  length  $M$




# Circular Convolution

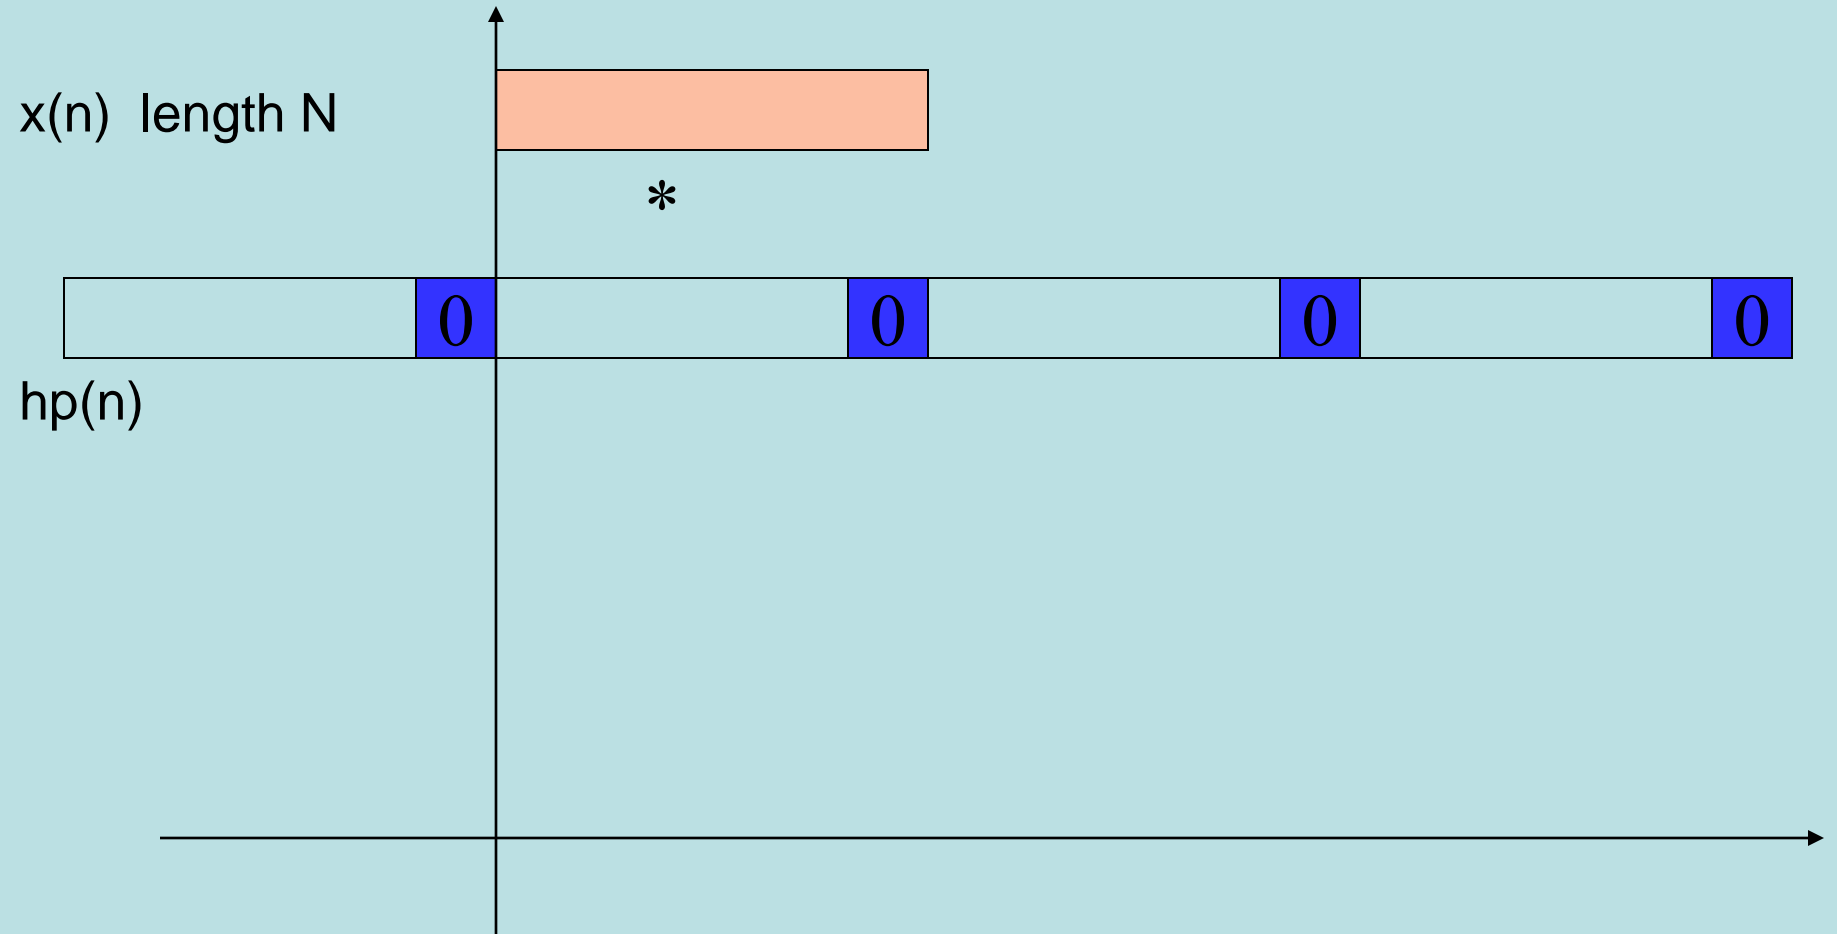


# Circular Convolution

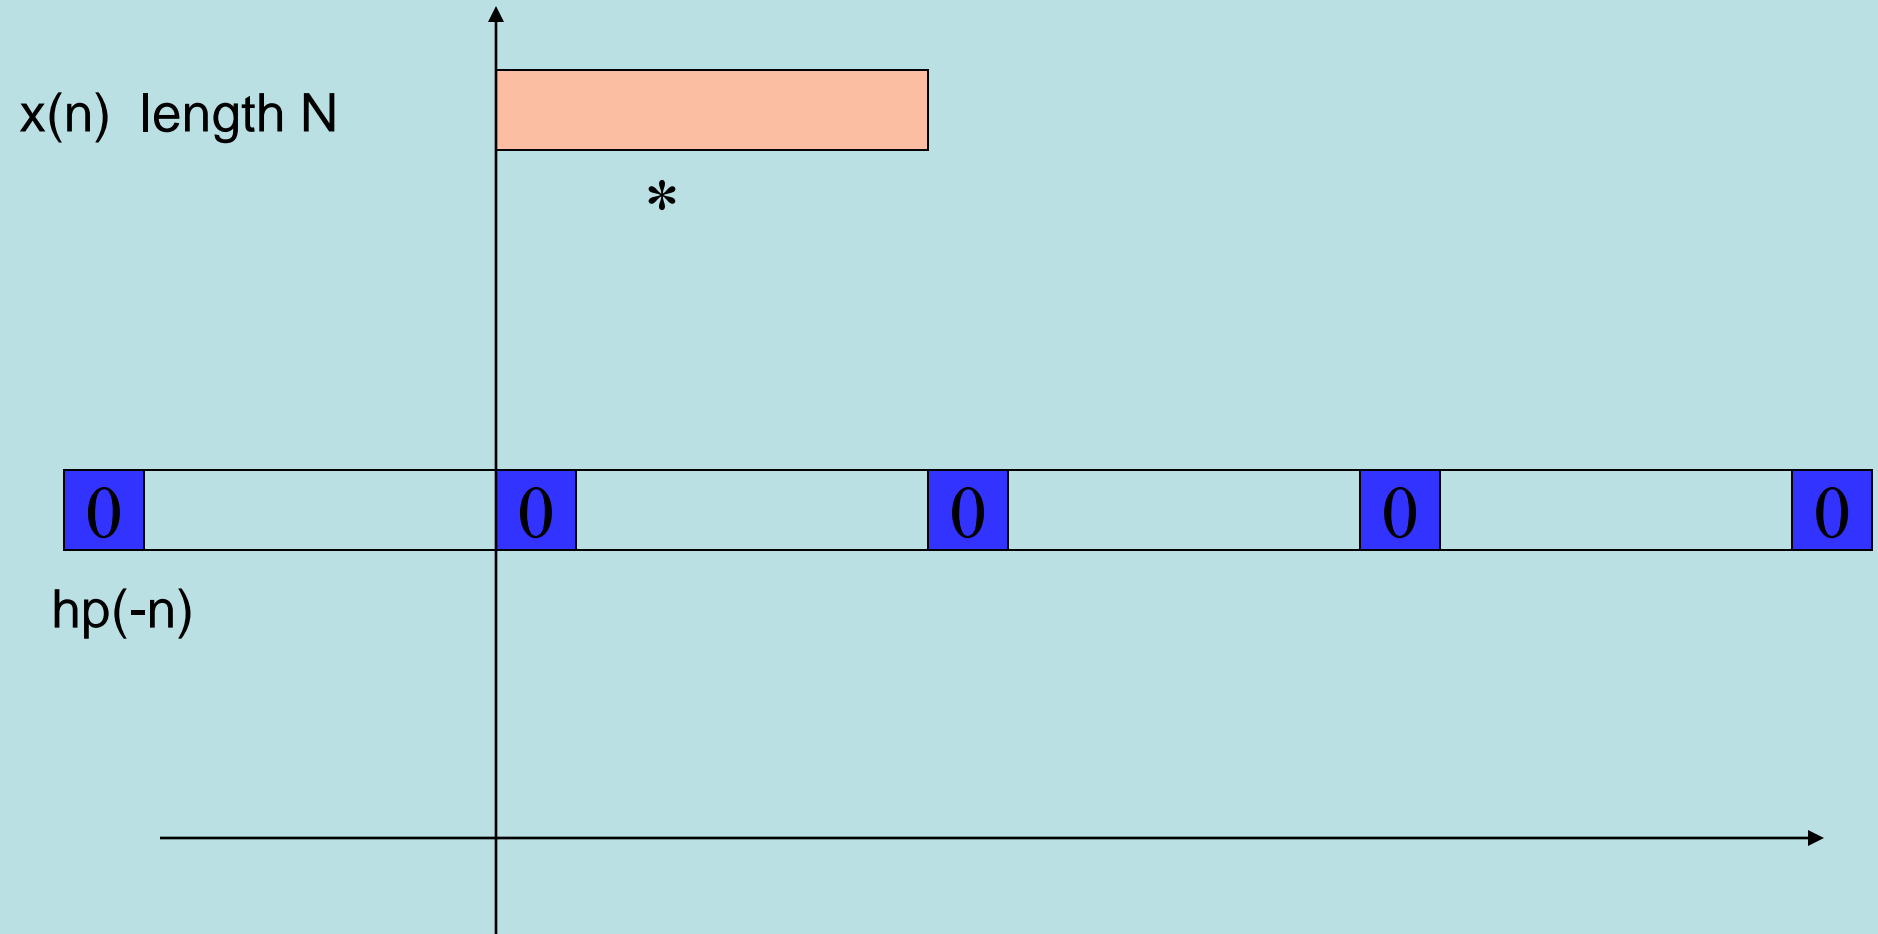

# Circular Convolution

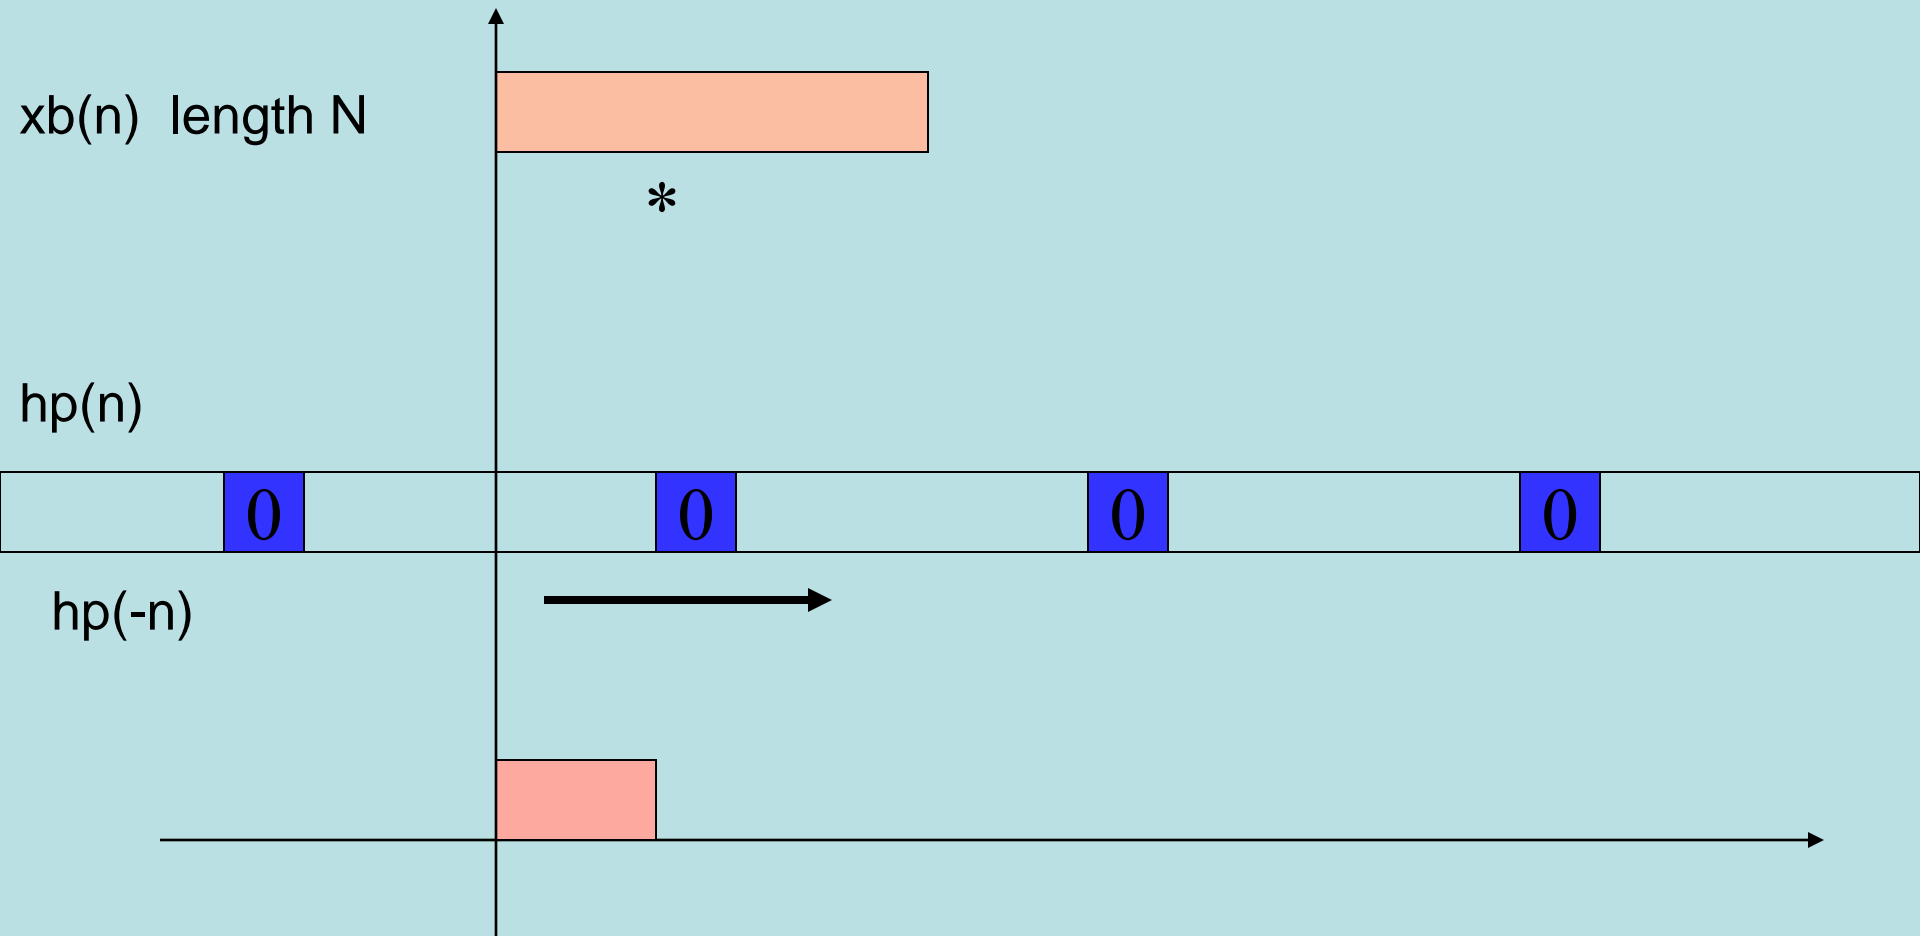


# Circular Convolution

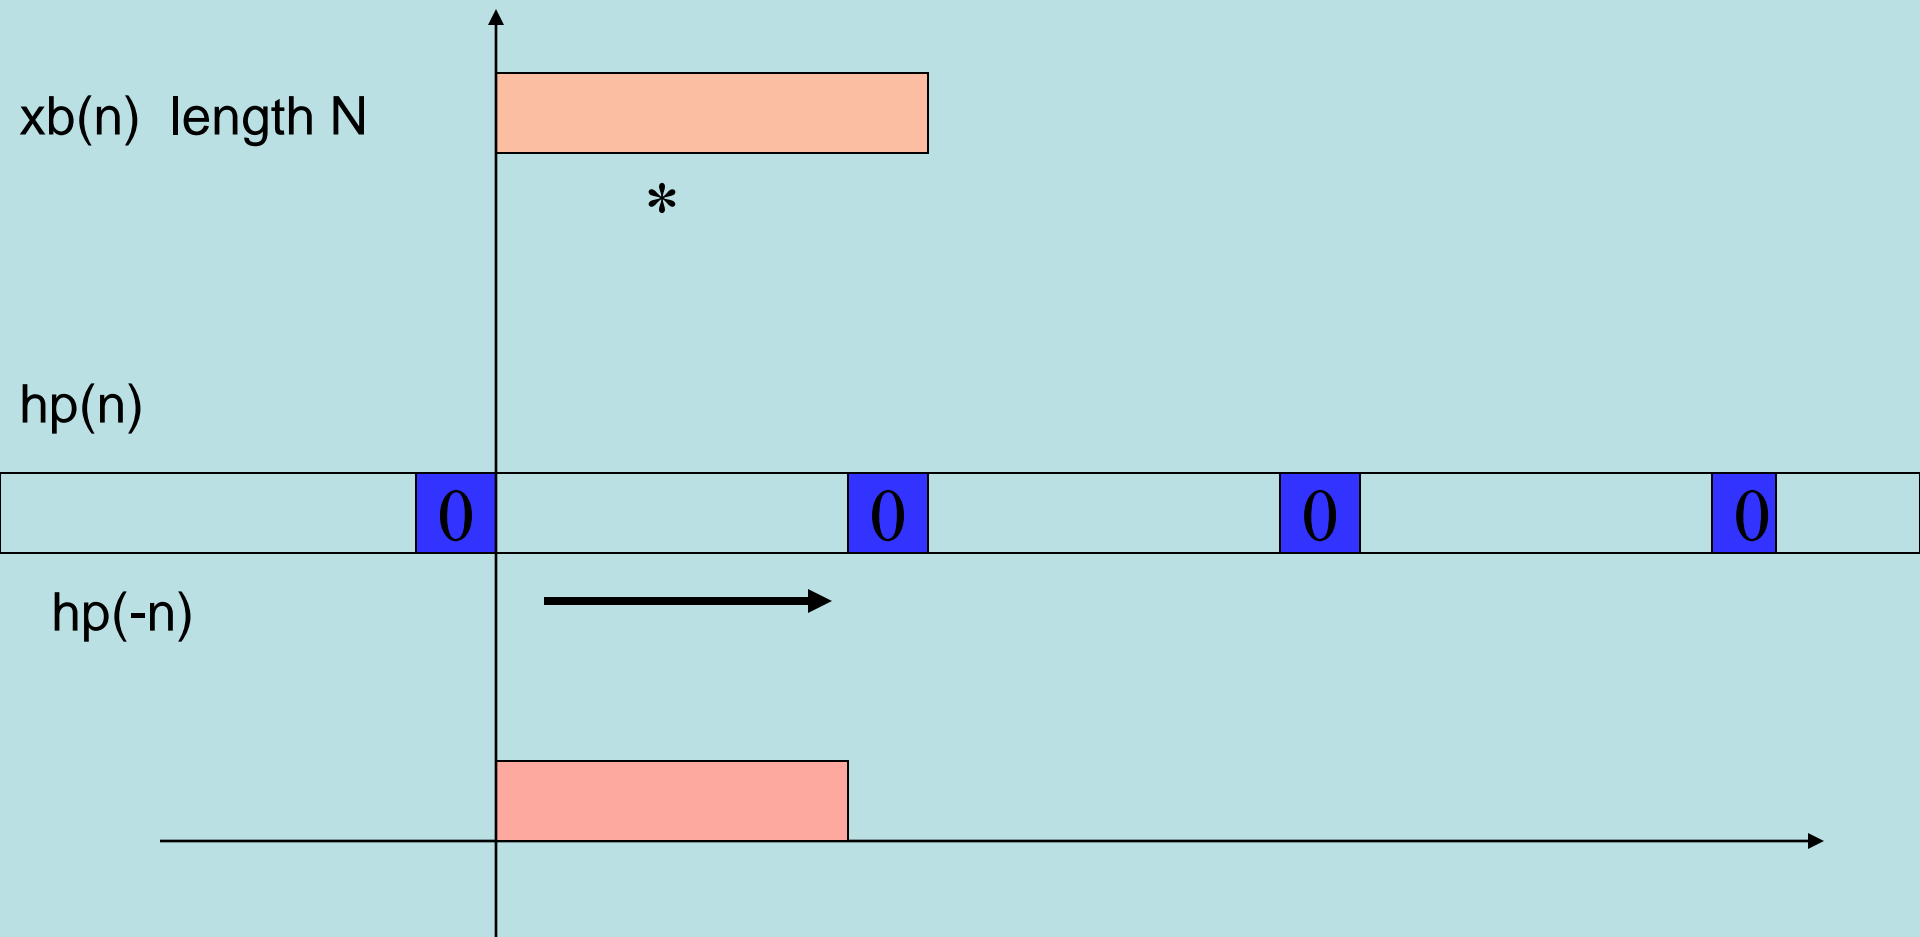



# Circular Convolution

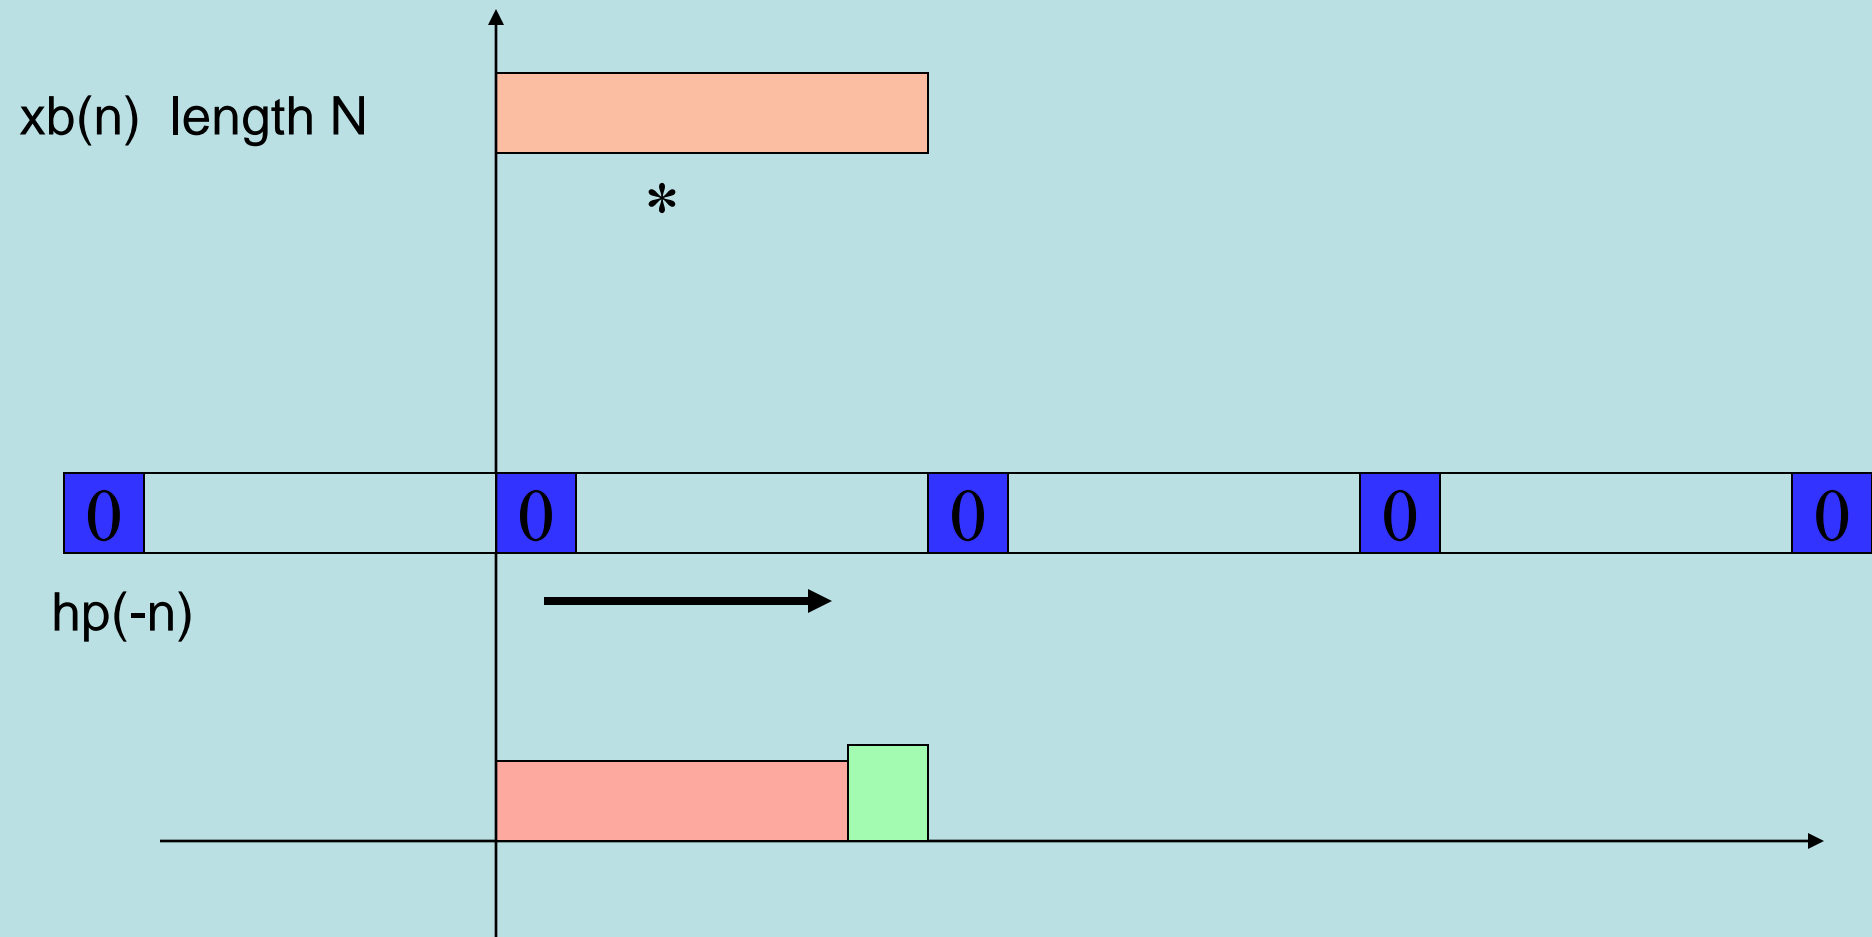

# Examples

- Let  $\{x(n)\}=\{1,2,3\}$  and  $\{h(n)\}=\{1,1,1\}$ , then the result should be  $\{y(n)\}=\{1,3,6,5,3\}$
- With  $L=M=3$ , we should choose  $N=5$
- however if we take  $N=4$ , the extended signals are
  - $\{x(n)\}=\{1,2,3,0\}$  and  $\{h(n)\}=\{1,1,1,0\}$
- The DFT yields
  - $X(k)=\{6,-2-2j,2,-2+2j\}$
  - $H(k)=\{3,-j,1,j\}$
  - $Y(k)=\{18,-2+2j,2,-2-2j\}$
  - Hence  $y(n)=\{4,3,6,5\}$

# Examples

$$x_p(n) = \{\dots 3, 0, 1, 2, 3, 0, 1, 2, 3, 0, 1, 2, 3, 0, 1, 2, 3, 0, 1, 2, 3, 0, \dots\}$$



$$x_p(-n) = \{\dots 3, 2, 1, 0, 3, 2, 1, 0, 3, 2, 1, 0, 3, 2, 1, 0, 3, 2, 1, 0, \dots\}$$

$$\{h(n)\} = \{1, 1, 1\},$$

$$y(n) = 4, 3, 6, 5$$

# Examples

If  $x(n)=\{1,2,3,0,0\} \rightarrow$  5 point DFT

$h(n)=\{1,1,1,0,0\} \rightarrow$  5 point DFT

we can get  $y(n)=\{1,3,6,5,3\}$

$\{1,2,3,0,0,1,2,3,0,0,1,2,3,0,0,1,2,3,0,0,1,2,3,0,0\}$

$\{1,1,1\}$

$x_p(n)=\{\dots,2,3,0,0,1,2,3,0,0,1,2,3,0,0,1,2,3,0,0,1,2,3,0\dots\}$

-----\*----- $\rightarrow$

$x_p(-n)=\{\dots,0,0,3,2,1,0,0,3,2,1,0,0,3,2,1,0,0,3,2,1,0,0,\dots\}$

$\{h(n)\} = \{1,1,1\},$


$y(n)=1,3,6,5,3$

# Convolution of long sequences

$x(n)$



$h(n)$



# Convolution of long sequences

$x(n)$



$h(n)$



# Convolution of long sequences

$x(n)$



# Convolution of long sequences

$x(n)$






# Convolution of long sequences

$x(n)$



# Convolution of long sequences

$x(n)$

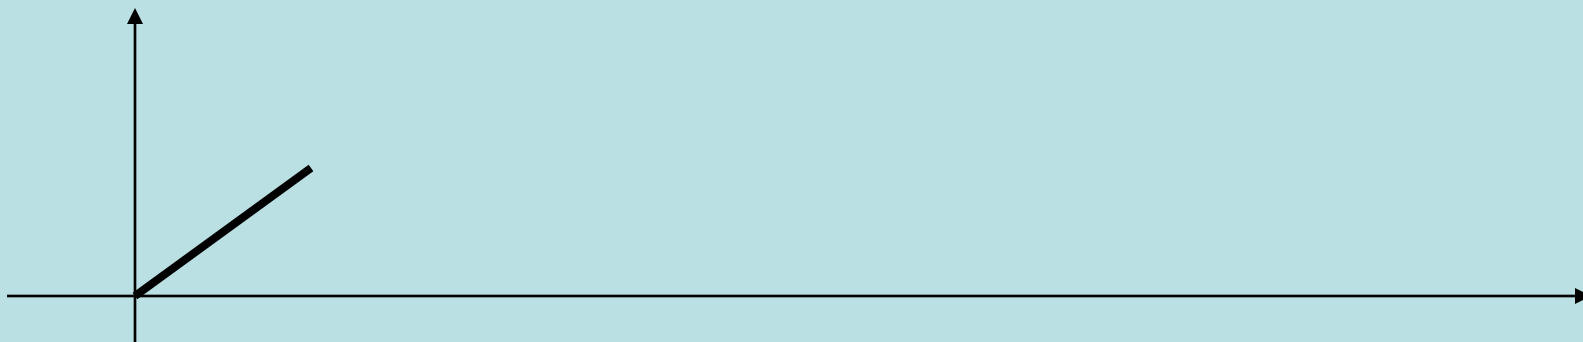

# Convolution of long sequences

$x(n)$



# Convolution of long sequences

$x(n)$



# Convolution of long sequences

$x(n)$



# Convolution of long sequences

$x(n)$



$h(n)$



# Convolution of long sequences

$x(n)$



$h(n)$



# Convolution of long sequences

$x(n)$




$h(n)$






# Convolution of long sequences

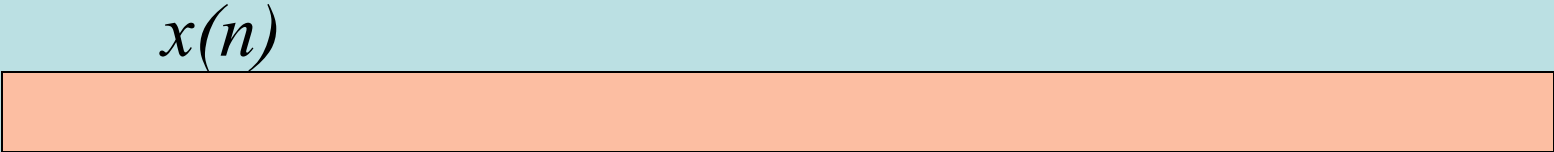


$h(n)$



# Convolution of long sequences

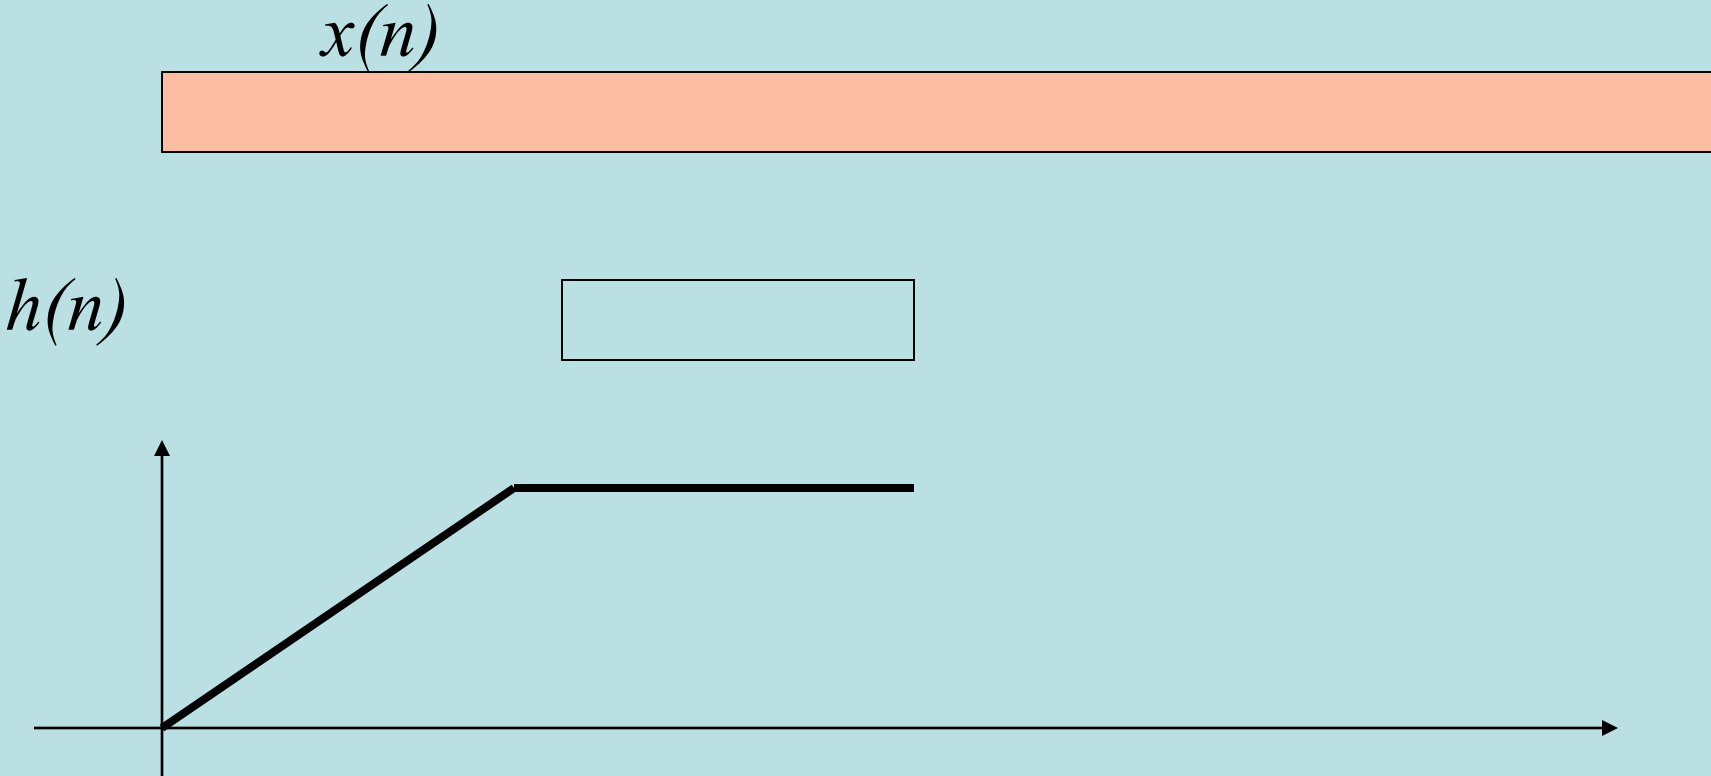


# Convolution of long sequences

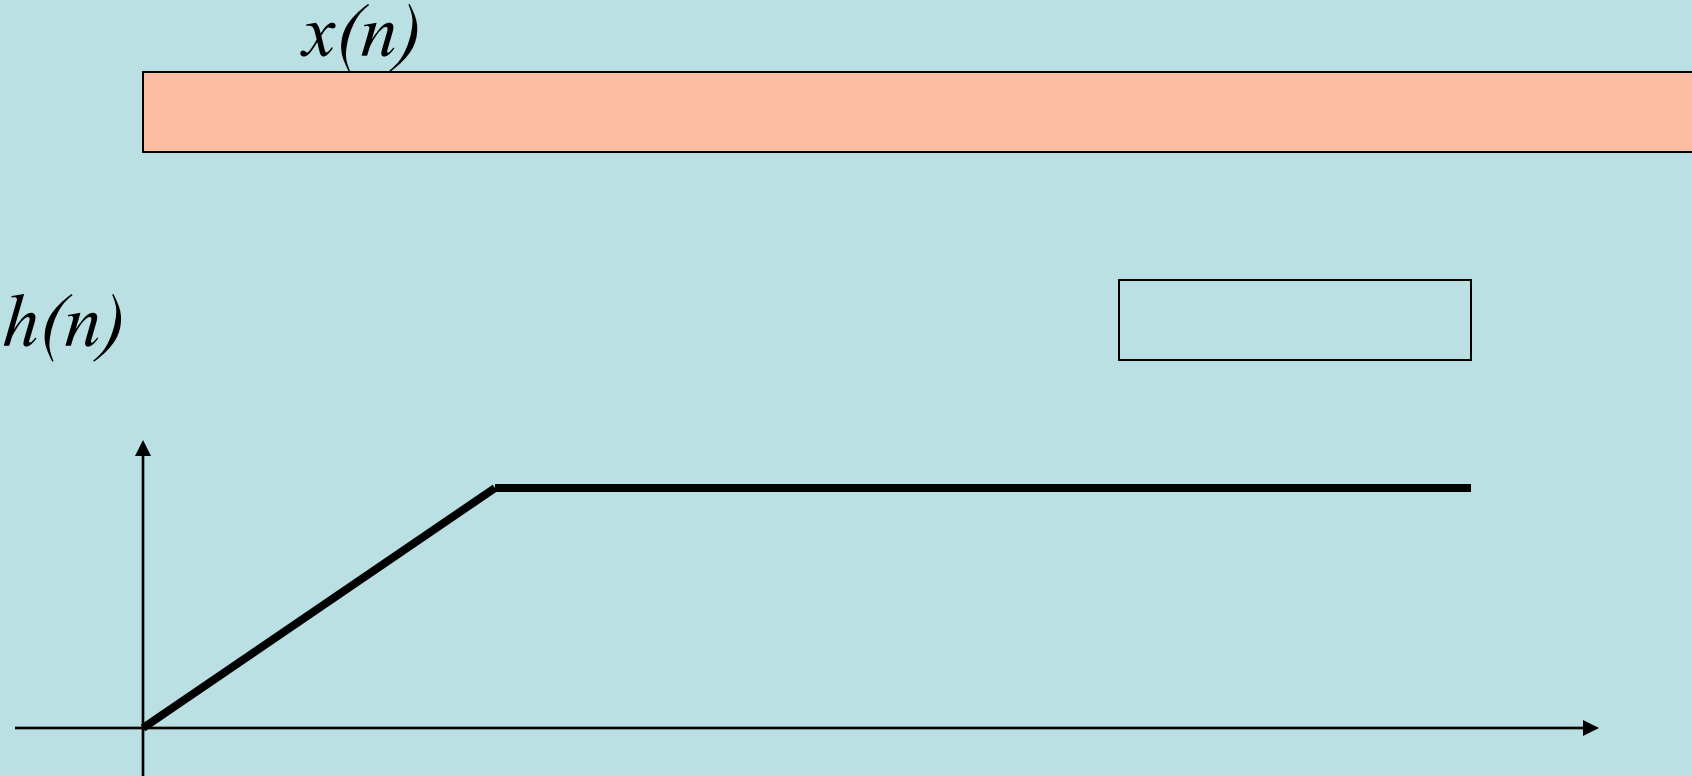

# Convolution of Long Sequences --- Block Based approach

- $x(n)$  are divided into blocks;
- convolutions are performed for each block and  $h(n)$  --- short time convolution;
- construct the output by combining the results of block convolution;
- Issues : how to construct the blocks? How to construct the output?
- Two approaches: overlap-save and overlap-add


# Convolution of long sequences

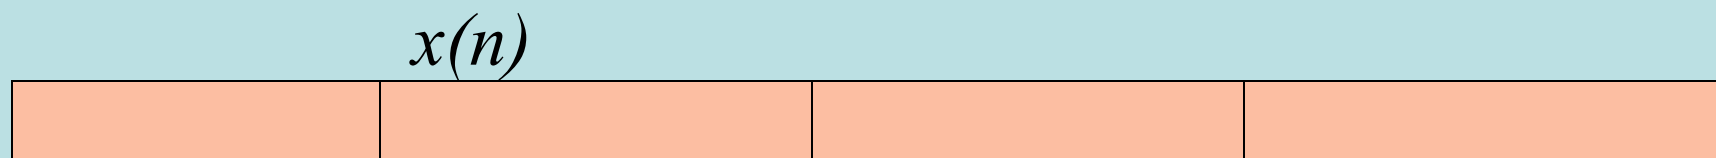

$h(n)$




# Overlap-save approach

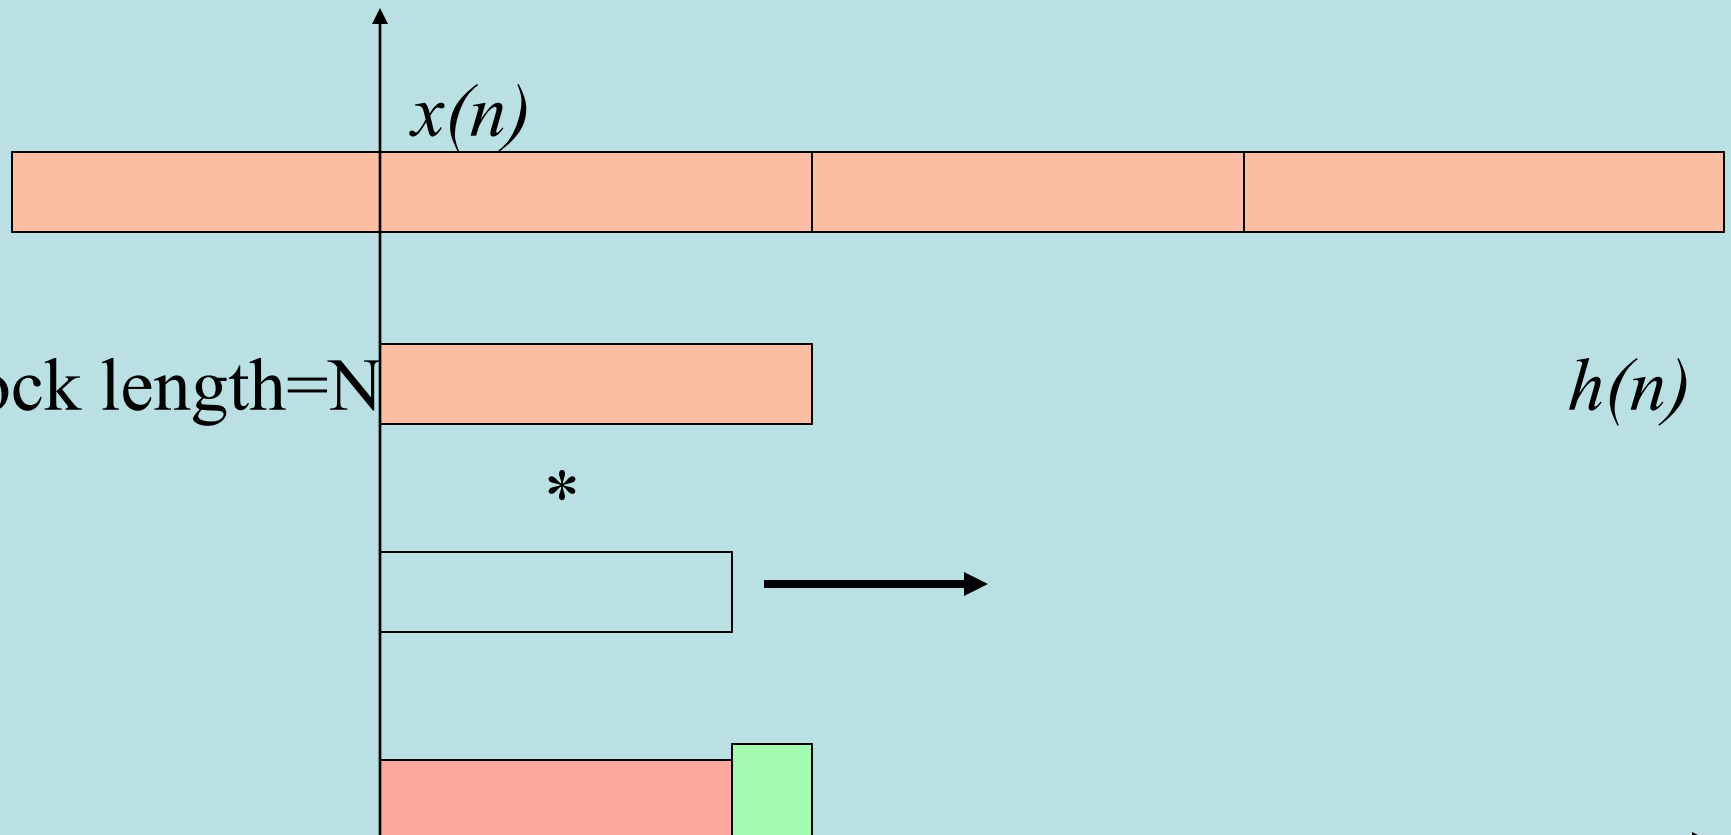


If N-point circular convolution is performed, the first  $M-1$  samples of the result will not be correct; only the last  $N-M+1$  samples are correct;

# Overlap-save approach

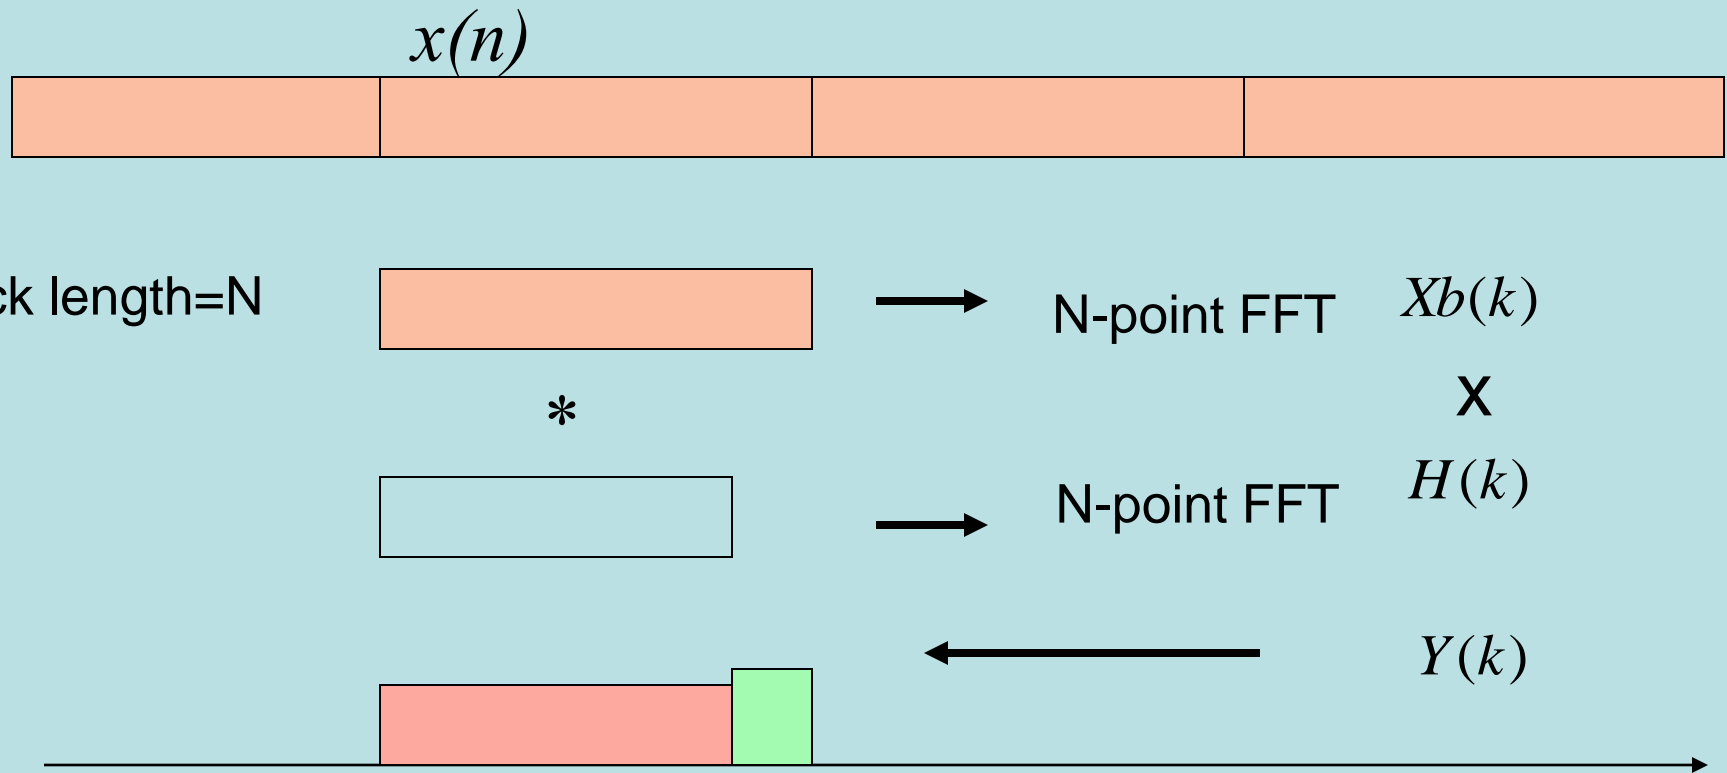

The first  $(M-1)$  samples will not be correct; only the  $(N-M+1)$  samples are correct;

# Overlap-save approach

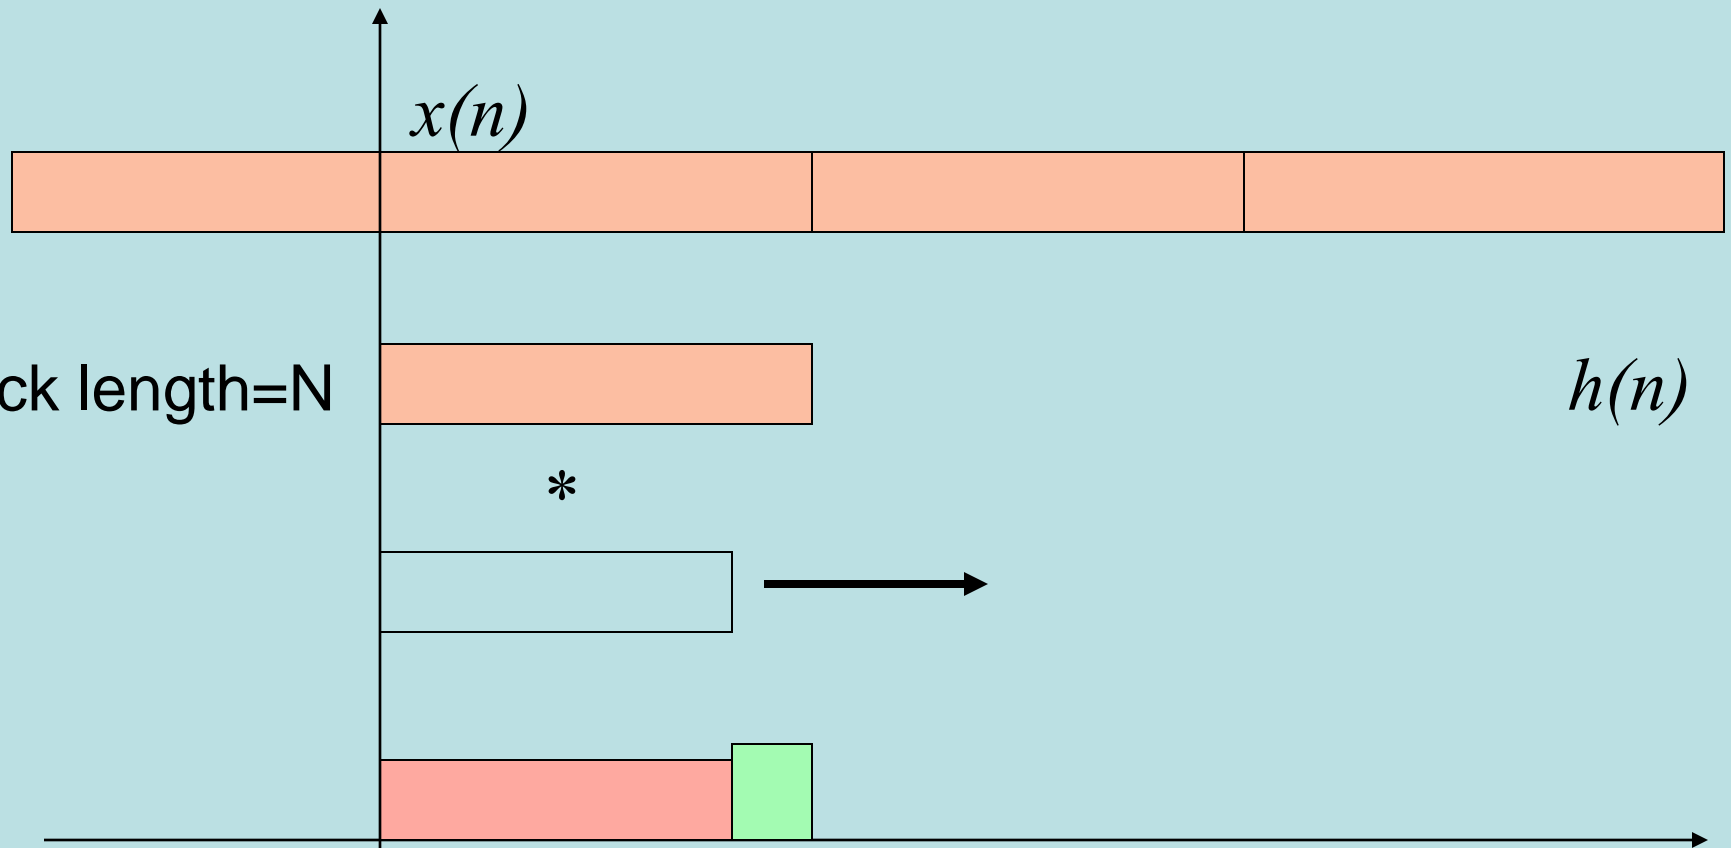

Block length= $N$


$h(n)$

\*


The first  $M-1$  samples will not be correct; only the  $N-M+1$  samples are correct;



# Overlap-save approach

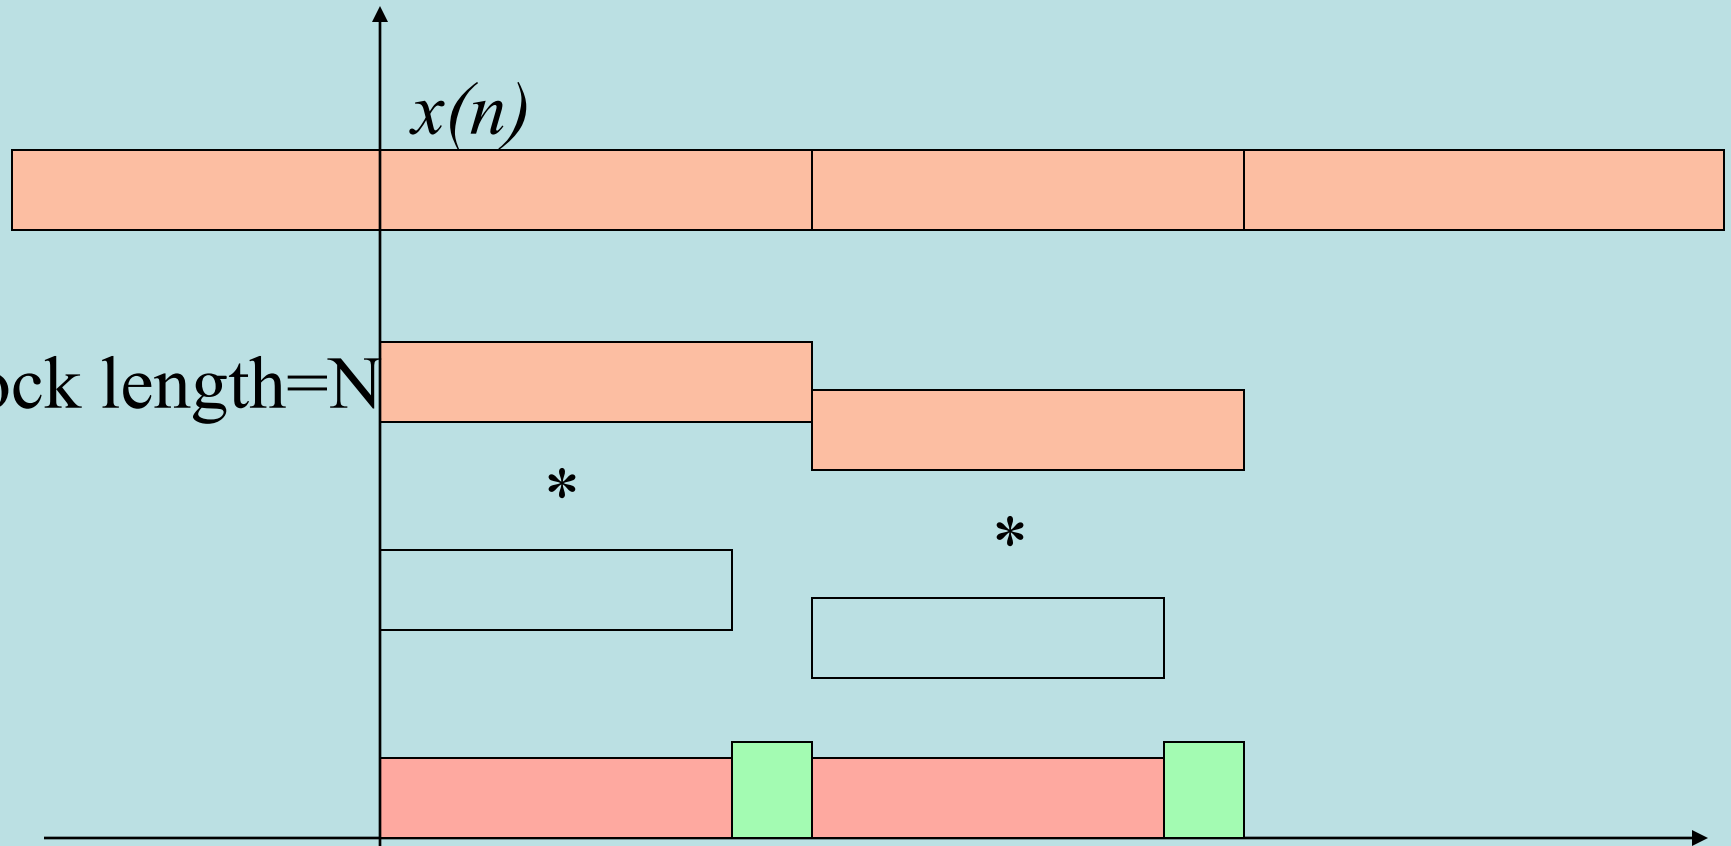


Some data will get lost if there is no overlap between the blocks

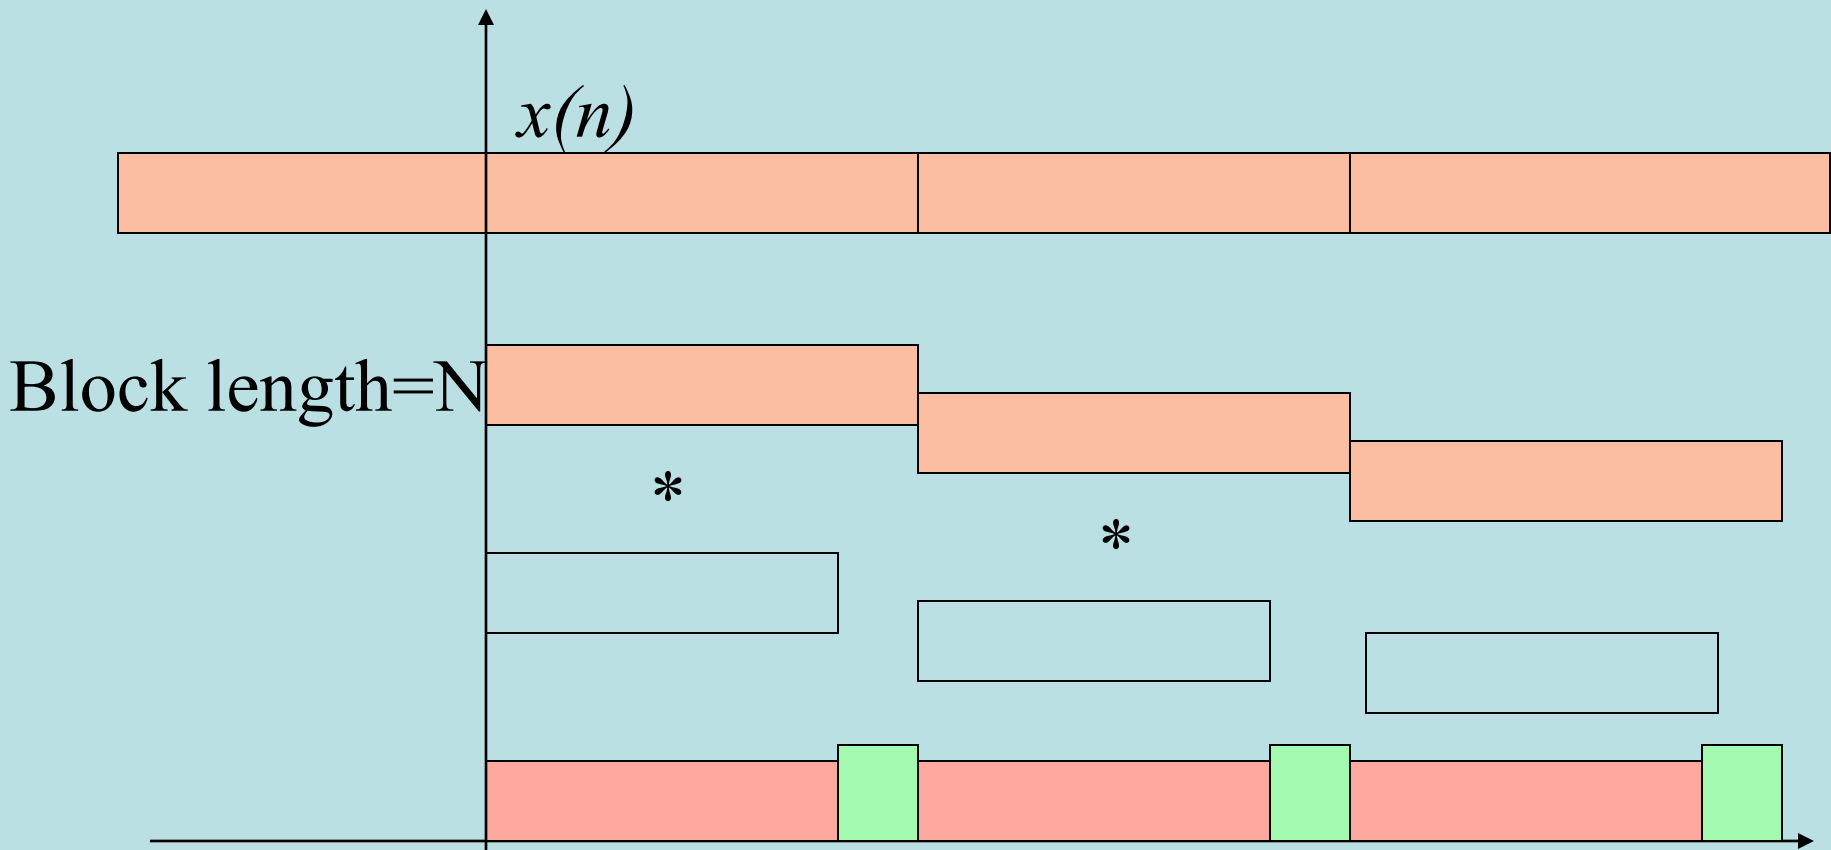

Block length= $N$

Some data will get lost if there is no overlap between the blocks

# Overlap-save approach

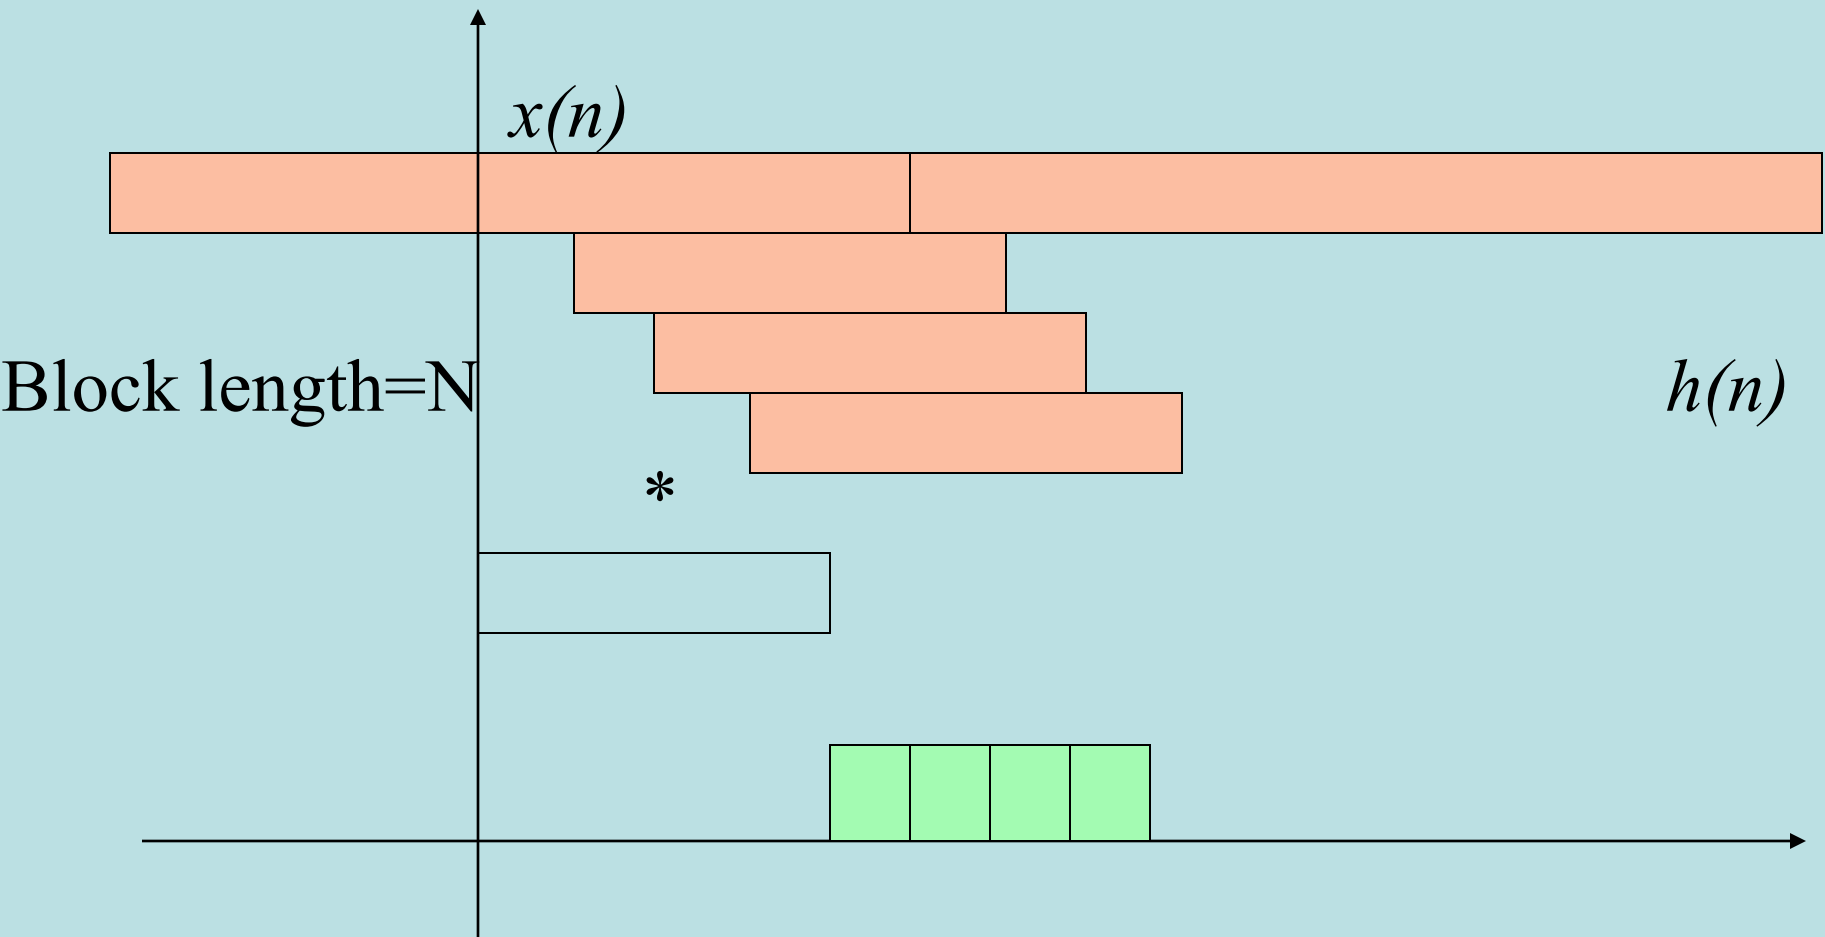

# Overlap-save approach

- The above process is called overlap-save methods:
  - Take  $N$  signal samples as a block;
  - do  $N$ -point DFT of the block, and  $N$ -point DFT of  $h(n)$  ( $N > M$  the length of  $h(n)$ );
  - Multiple  $X_b(k)$  and  $H(k)$ ;
  - Do the IDFT of  $Y(k)$
  - Discard the first  $(M-1)$  samples of  $y(n)$ ;

# Overlap-save approach

- Get the next block by getting  $N-M+1$  new samples, and discard  $(N-M+1)$  oldest samples
- Repeat the above convolution process.


# Overlap-save approach--- an example

- Convolve a 50-point sequence  $h(n)$  with a long sequence  $x(n)$ :
  - 1. Let  $N=64$ ;
  - 2. taking 64 samples from  $x(n)$ , perform circular convolution using 64-point FFT. Discard the first 49 samples and keep the last  $64-50+1=15$  samples;
  - Move the block by getting 15 samples from  $x(n)$ , repeat step 2 and keep the next 15 samples of the result....
  - Combine all the 15 samples together to get the convolution results

# Convolution of Long Sequences --- Overlap-Add Method

- Here we try to use linear convolution instead of circular convolution:
  - Take a block  $x_b(n)$  of length  $L$ ;
  - $H(n)$  is of length  $M$ ;
  - Take the  $N$ -point DFT of them, where  $N=L+M-1$
  - Calculate  $Y(k)=X(k)H(k)$ ,  $k=0, 1, \dots, N-1$
  - Calculate IDFT of  $Y(k)$  yield  $y(n)$ ,  $n=0, 1, \dots, N-1$

# Convolution of long sequences

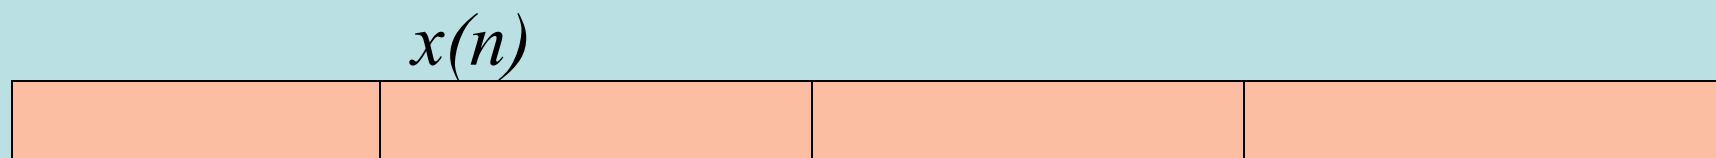


$h(n)$






# Convolution of long sequences

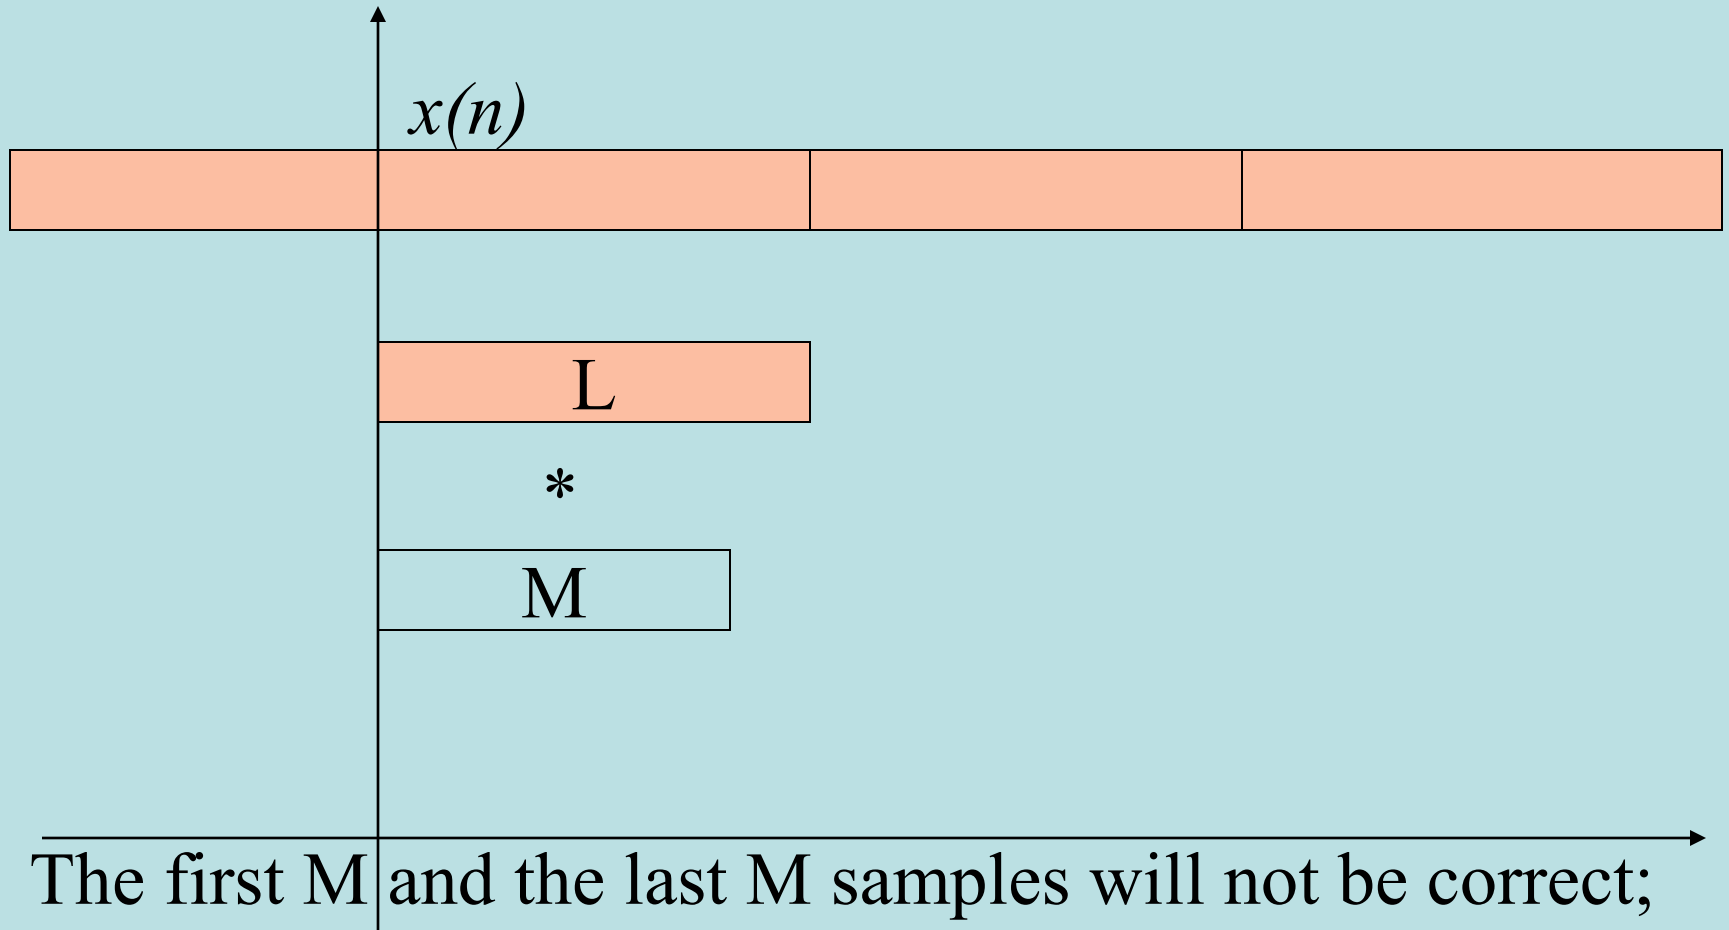


The first  $M$  and the last  $M$  samples will not be correct;  
only the  $N-M$  samples are correct;

# Convolution of long sequences

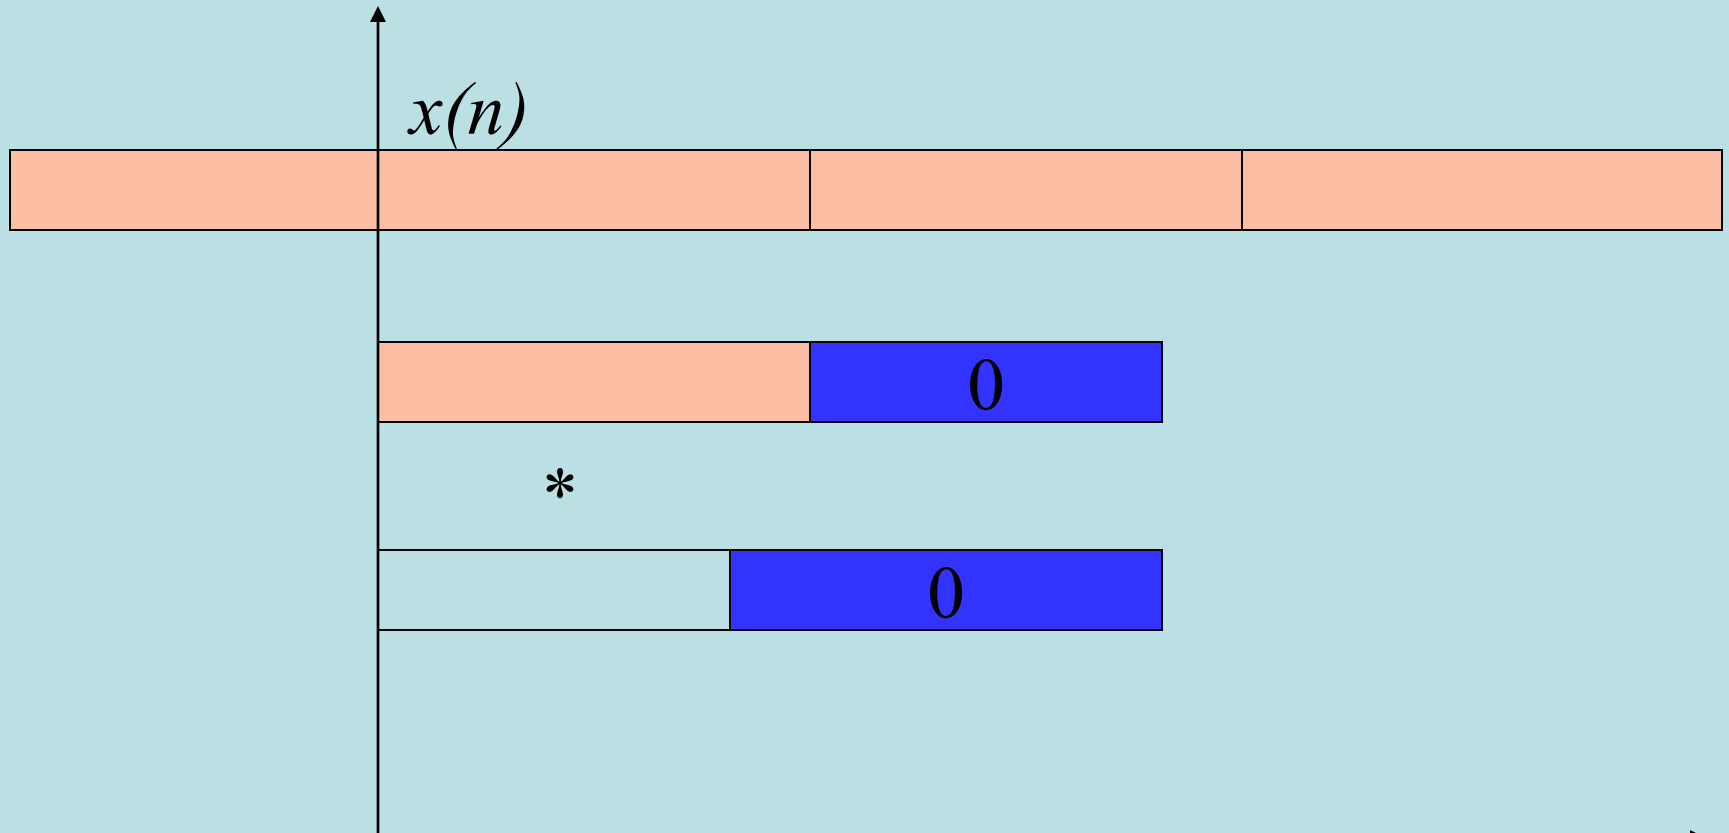


The first  $M-1$  and the last  $M-1$  samples will not be correct; only the  $N-M$  samples are correct;

# Convolution of long sequences

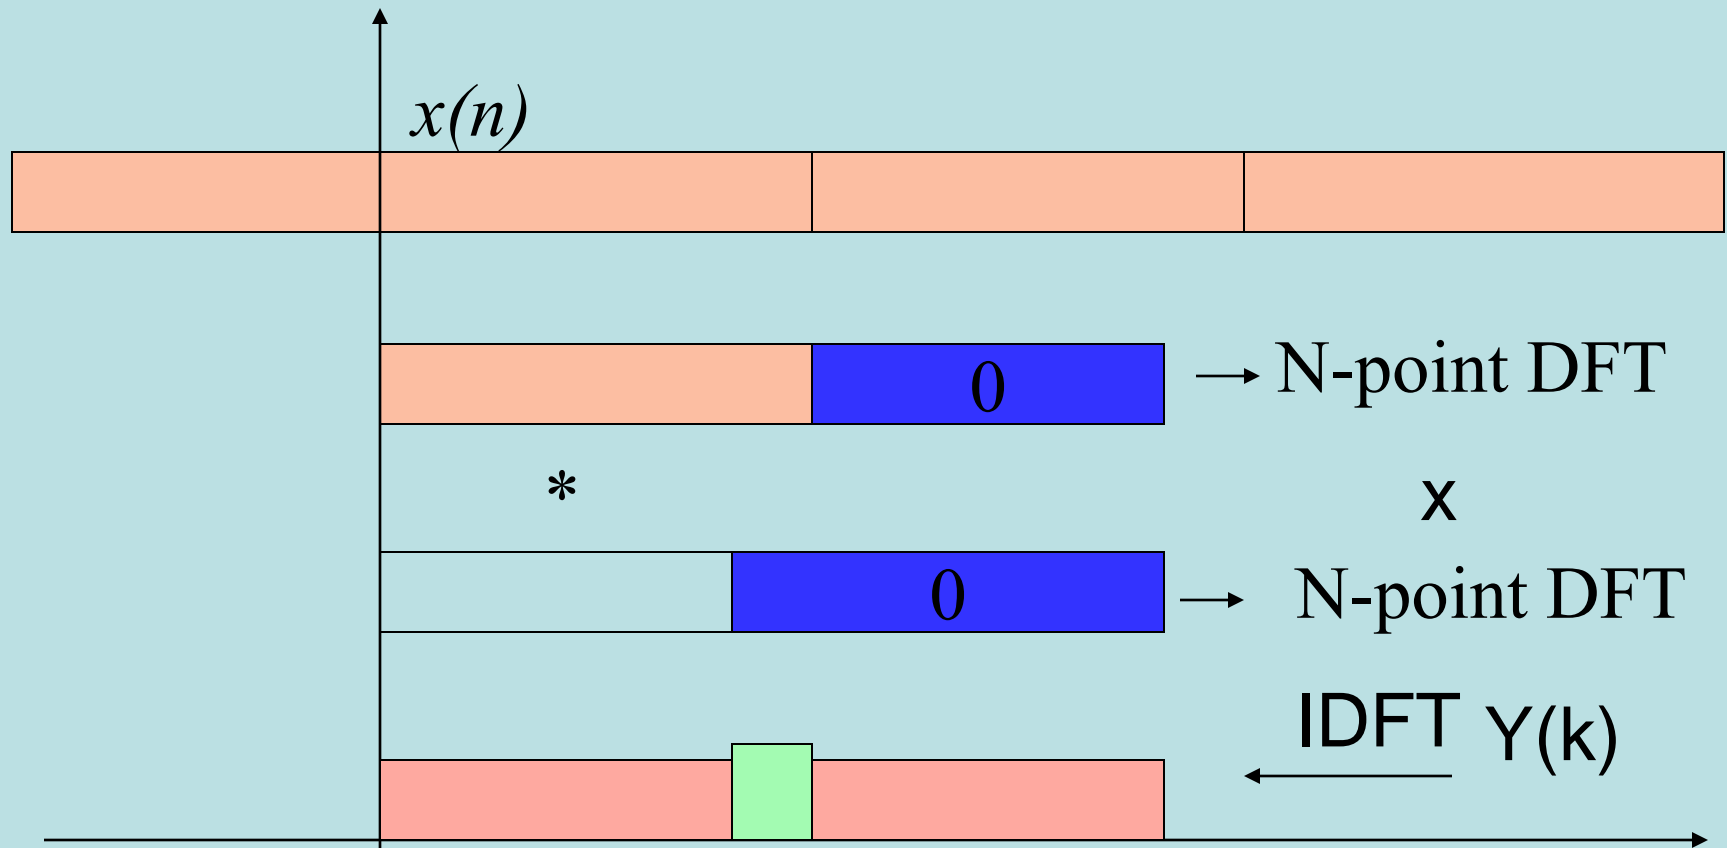


The first  $M-1$  and the last  $M-1$  samples will not be correct; only the  $N-M+1$  samples are correct;


# Convolution of long sequences

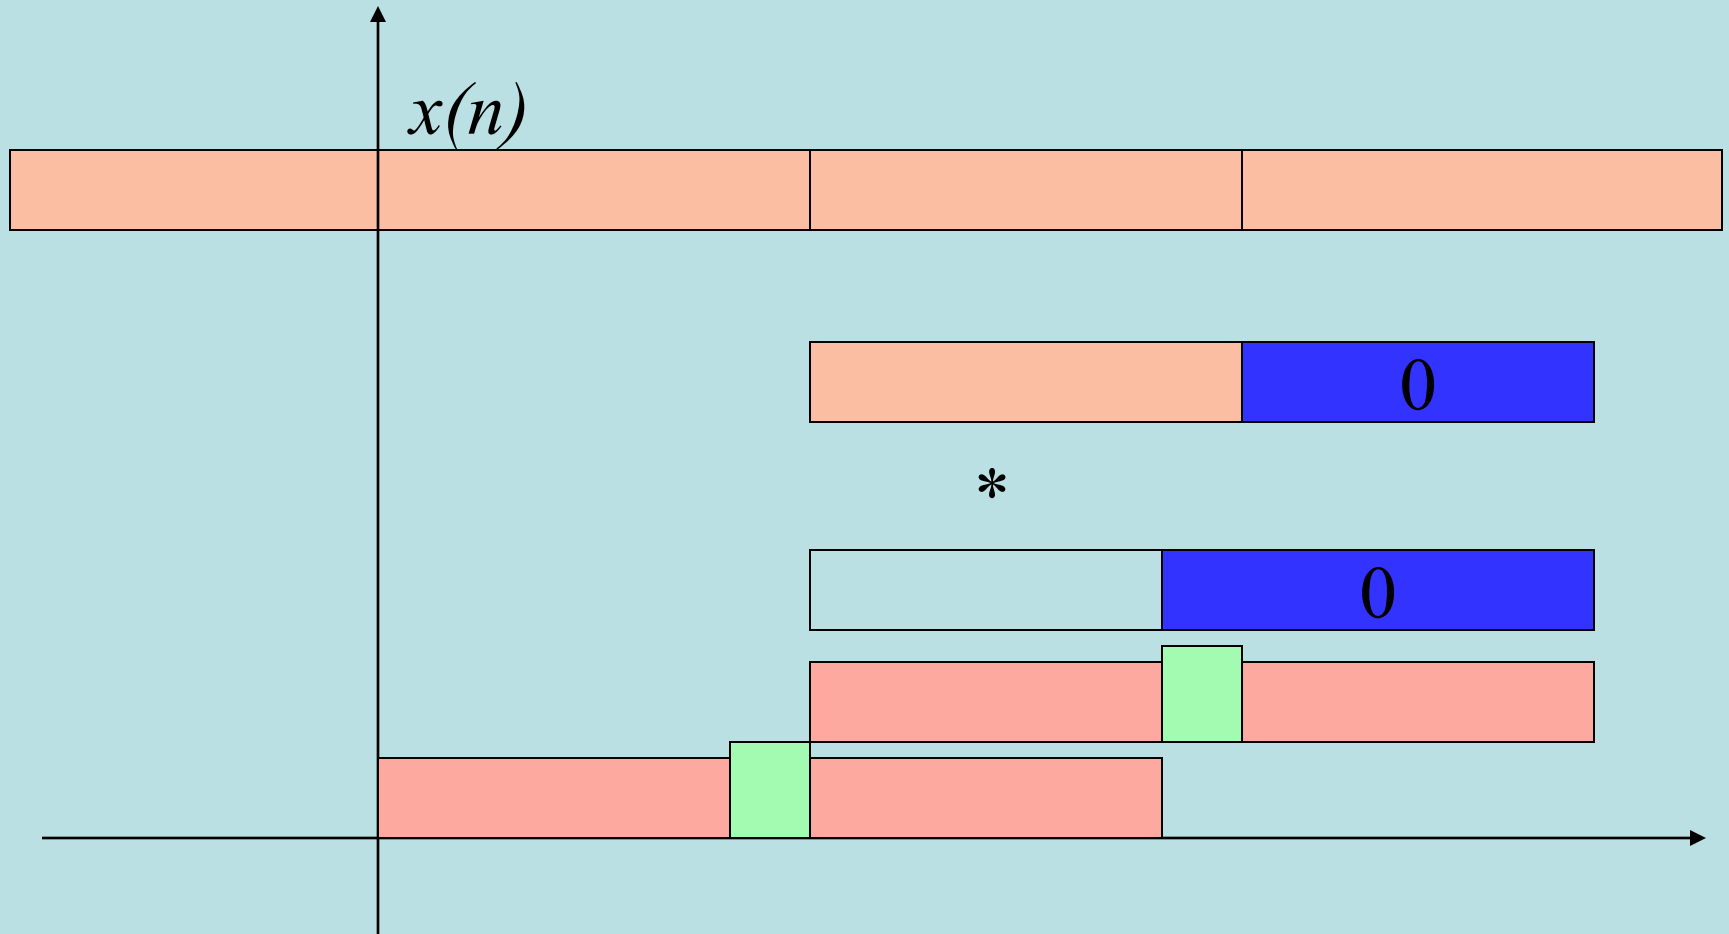

# Convolution of long sequences

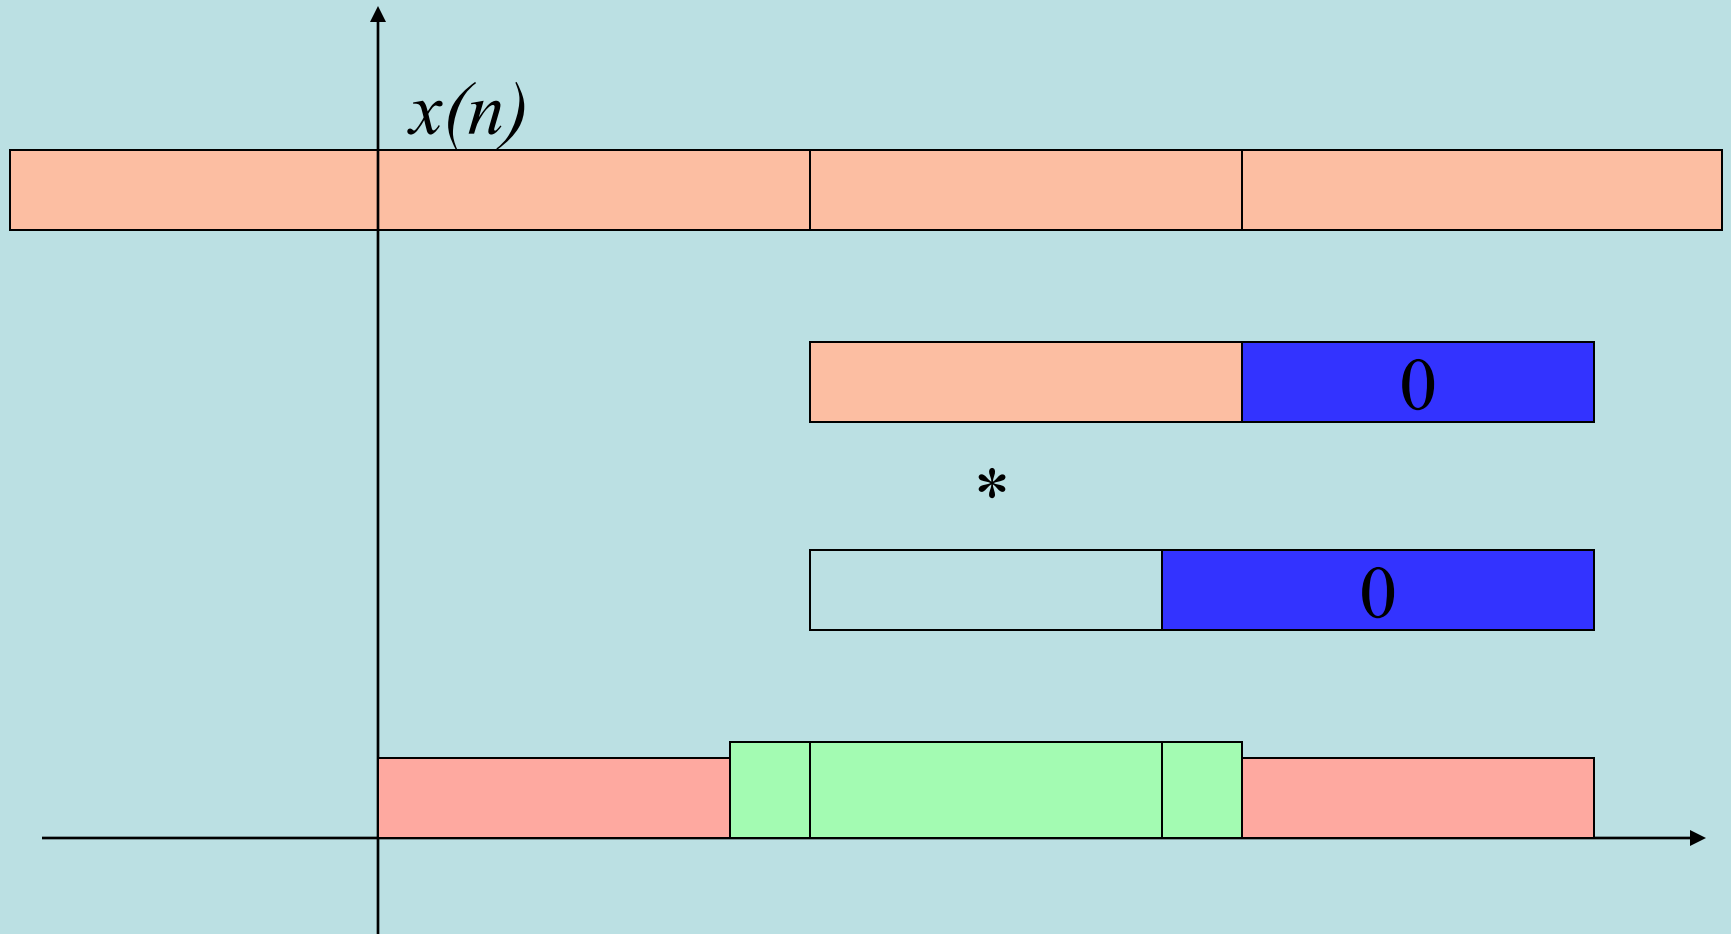

# Convolution of long sequences

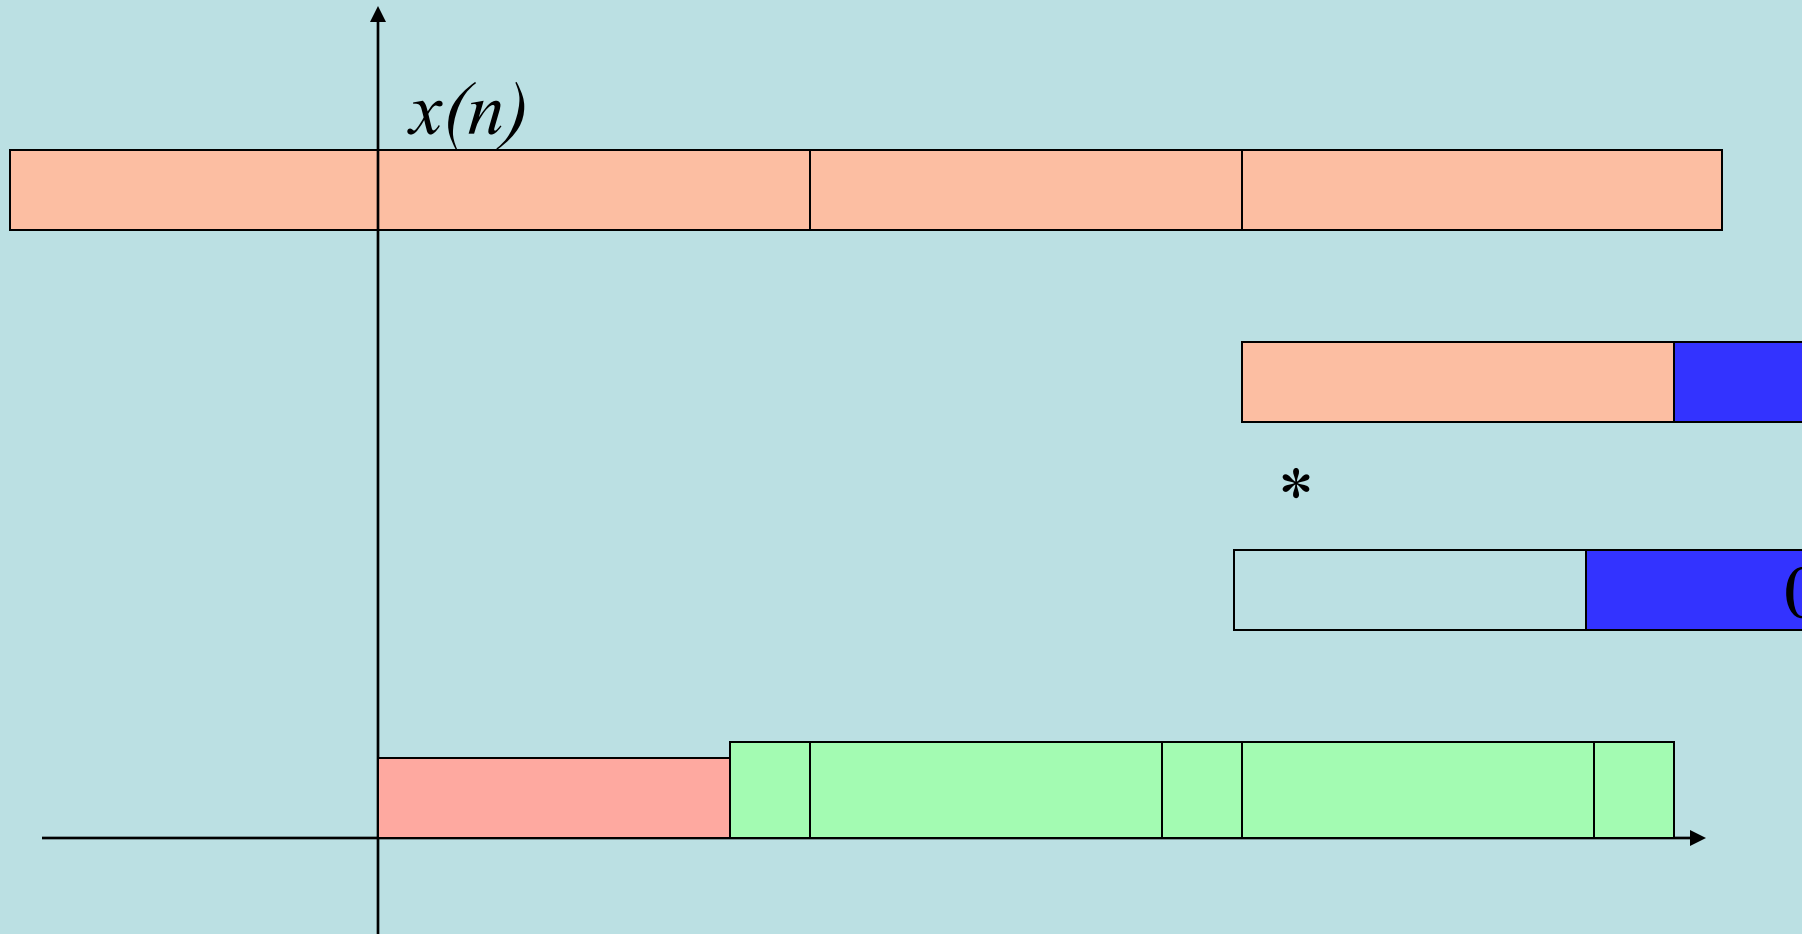

# Convolution of Long Sequences --- Overlap-Add Method

- Construct the mth block  $x_b(n)$  as:  
 $\{x(mL), x(mL+1), \dots, x(mL+L-1), 0, \dots, 0\} \rightarrow$  Length N
- Take the N-point DFTs of  $x_b(n)$  and  $h(n)$ ;
- Multiplication  $Y_m(k) = X_b(k)H(k)$
- IDFT:  $y(n) = \text{IDFT}(Y(k))$
- Repeat the operation for next block  
 $\{x((m+1)L), x((m+1)L+1), \dots, x((m+1)L+L-1), 0, \dots, 0\}$   
.....

# Convolution of Long Sequences --- Overlap-Add Method

- The last  $(M-1)$  points for the first  $y(n)$  are overlapped and added to the first  $(M-1)$  points of the second  $y(n)$ ;
- The last  $(M-1)$  points for the second  $y(n)$  are overlapped and added to the first  $(M-1)$  points of the third  $y(n)$ ;
- .....
- The above process will result in the convolution of  $h(n)$  and  $x(n)$



# Summary

- Fast convolution of short sequences
  - Linear convolution
  - Circular convolution
  - When they can be equal?
- Fast convolution of short sequences
  - Overlap-saving (block overlapping, discard some results)
  - Overlap-adding(block separate, overlap and add some results)