



# **Information Security System**

## **EC-415-F**

6/30/2015



# Lecture 6

## Web Security

# Topics Covered

- Cryptographic algorithms
  - symmetric ciphers
  - asymmetric encryption
  - hash functions
- Mutual Trust
- Network Security
- Computer Security


# Standards Organizations

- National Institute of Standards & Technology (NIST)
- Internet Society (ISOC)
- International Telecommunication Union  
Telecommunication Standardization Sector (ITU-T)
- International Organization for Standardization (ISO)
- RSA Labs (de facto)

# Computer Security

- the protection afforded to an automated information system in order to attain the applicable objectives of preserving the integrity, availability and confidentiality of information system resources (includes hardware, software, firmware, information/data, and telecommunications)

# Key Security Concepts

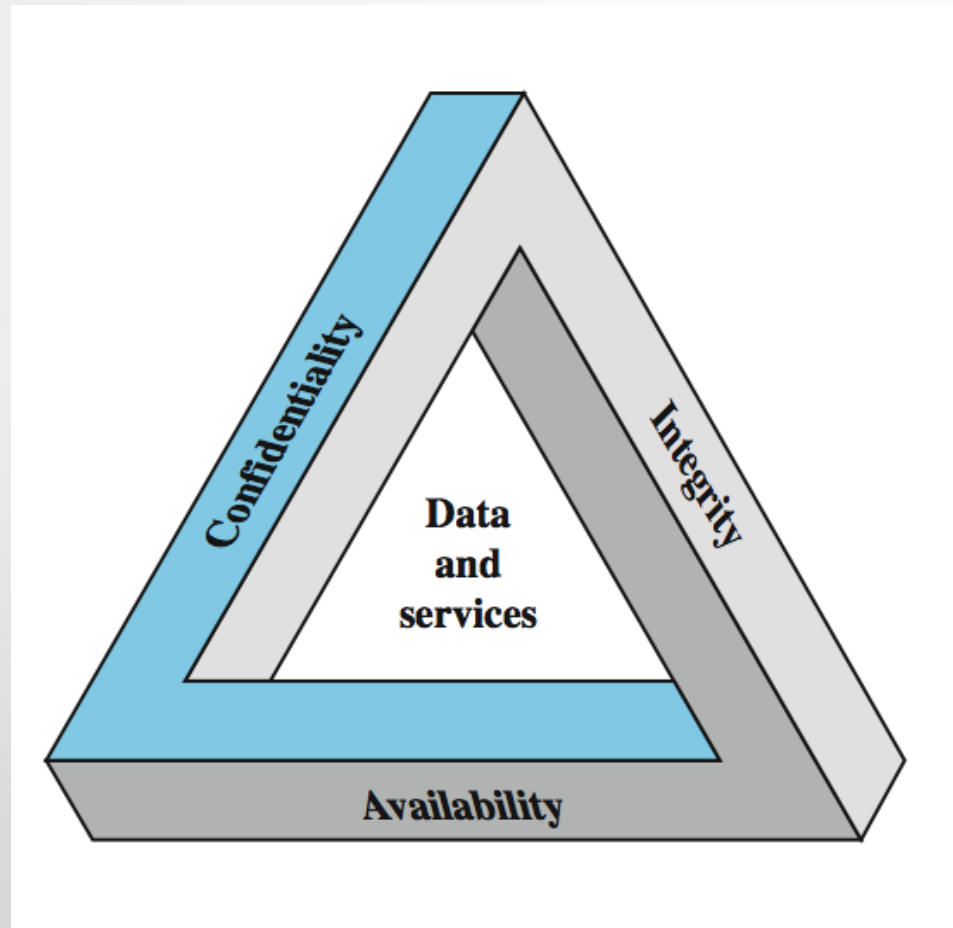

# Levels of Impact

- can define 3 levels of impact from a security breach
  - Low
  - Moderate
  - High

# Low Impact

- The loss could be expected to have a limited adverse effect on organizational operations, organizational assets, or individuals.
- A limited adverse effect means that, for example, the loss of confidentiality, integrity, or availability might
  - (i) cause a degradation in mission capability to an extent and duration that the organization is able to perform its primary functions, but the effectiveness of the functions is noticeably reduced;
  - (ii) result in minor damage to organizational assets;
  - (iii) result in minor financial loss; or
  - (iv) result in minor harm to individuals.



# Moderate Impact

- The loss could be expected to have a serious adverse effect on organizational operations, organizational assets, or individuals.
- A serious adverse effect means that, for example, the loss might
  - (i) cause a significant degradation in mission capability to an extent and duration that the organization is able to perform its primary functions, but the effectiveness of the functions is significantly reduced;
  - (ii) result in significant damage to organizational assets;
  - (iii) result in significant financial loss; or
  - (iv) result in significant harm to individuals that does not involve loss of life or serious, life-threatening injuries.

# High Impact

- The loss could be expected to have a severe or catastrophic adverse effect on organizational operations, organizational assets, or individuals.
- A severe or catastrophic adverse effect means that, for example, the loss might
  - (i) cause a severe degradation in or loss of mission capability to an extent and duration that the organization is not able to perform one or more of its primary functions;
  - (ii) result in major damage to organizational assets;
  - (iii) result in major financial loss; or
  - (iv) result in severe or catastrophic harm to individuals involving loss of life or serious life threatening injuries.

# Examples of Security Requirements


- **authenticity – admission ticket**  
confidentiality – student grades
- **non-repudiation – stock sell order**  
integrity – patient information
- availability – authentication service

# Computer Security Challenges

1. not simple – easy to get it wrong
  2. must consider potential attacks
  3. procedures used counter-intuitive
  4. involve algorithms and secret info
  5. must decide where to deploy mechanisms
  6. battle of wits between attacker / admin
  7. not perceived on benefit until fails
  8. requires regular monitoring  
a process, not an event
  9. too often an after-thought
  10. regarded as impediment to using system
- “Unusable security is not secure”**

# OSI Security Architecture


- ITU-T X.800 “Security Architecture for OSI”
- defines a systematic way of defining and providing security requirements
- for us it provides a useful, if abstract, overview of concepts we will study

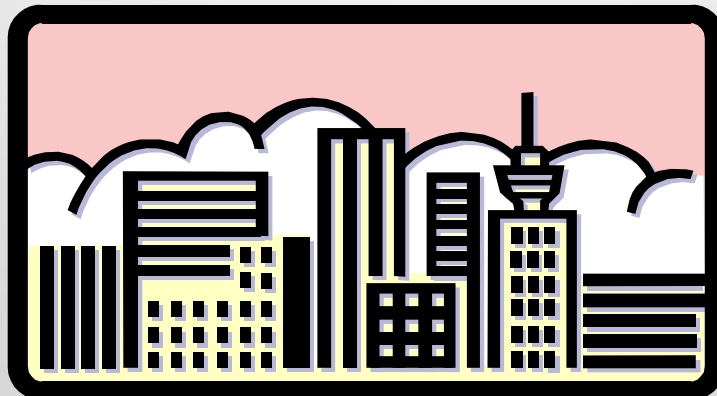


# Aspects of Security

- consider 3 aspects of information security:
  - **security attack**
  - **security mechanism (control)**
  - **security service**
- note terms
  - *threat* – a potential for violation of security
  - *vulnerability* – a way by which loss can happen
  - *attack* – an assault on system security, a deliberate attempt to evade security services

# Passive Attack - Interception

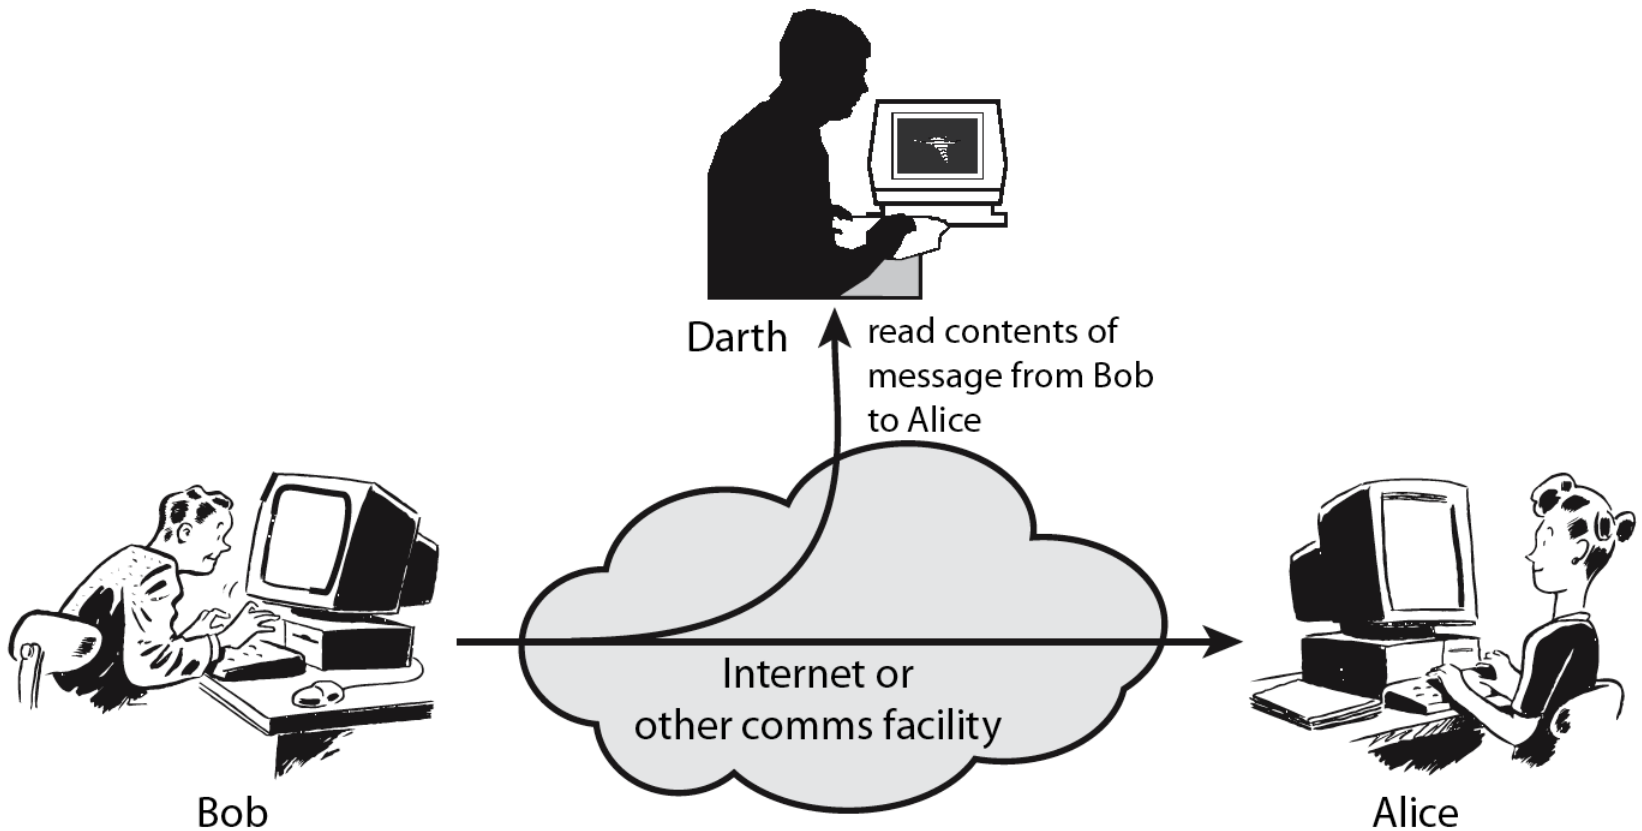


# Passive Attack: Traffic Analysis

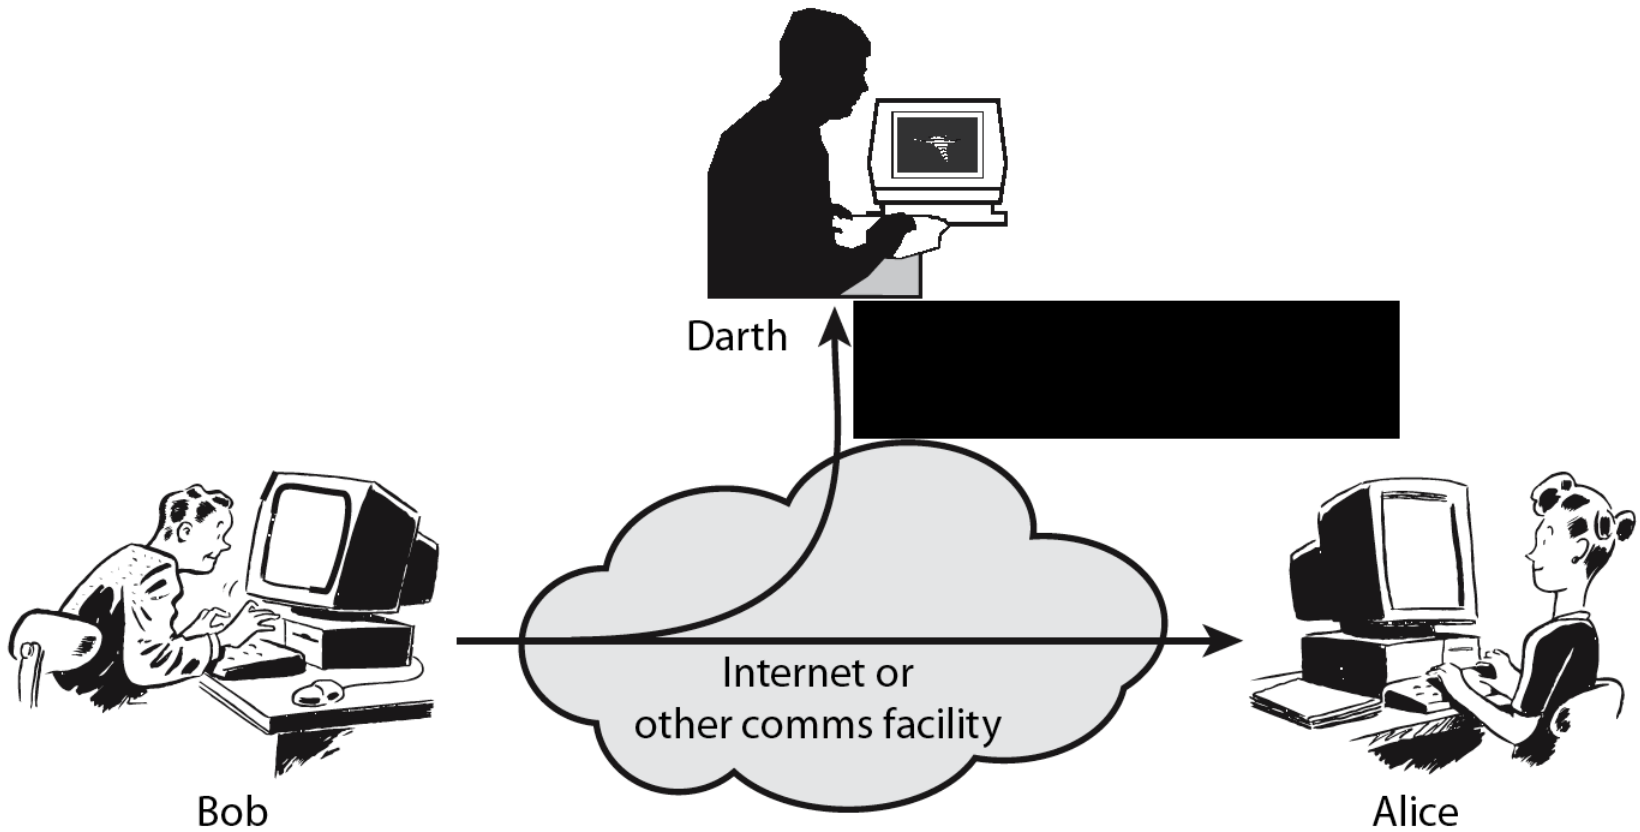





# Active Attack: Interruption

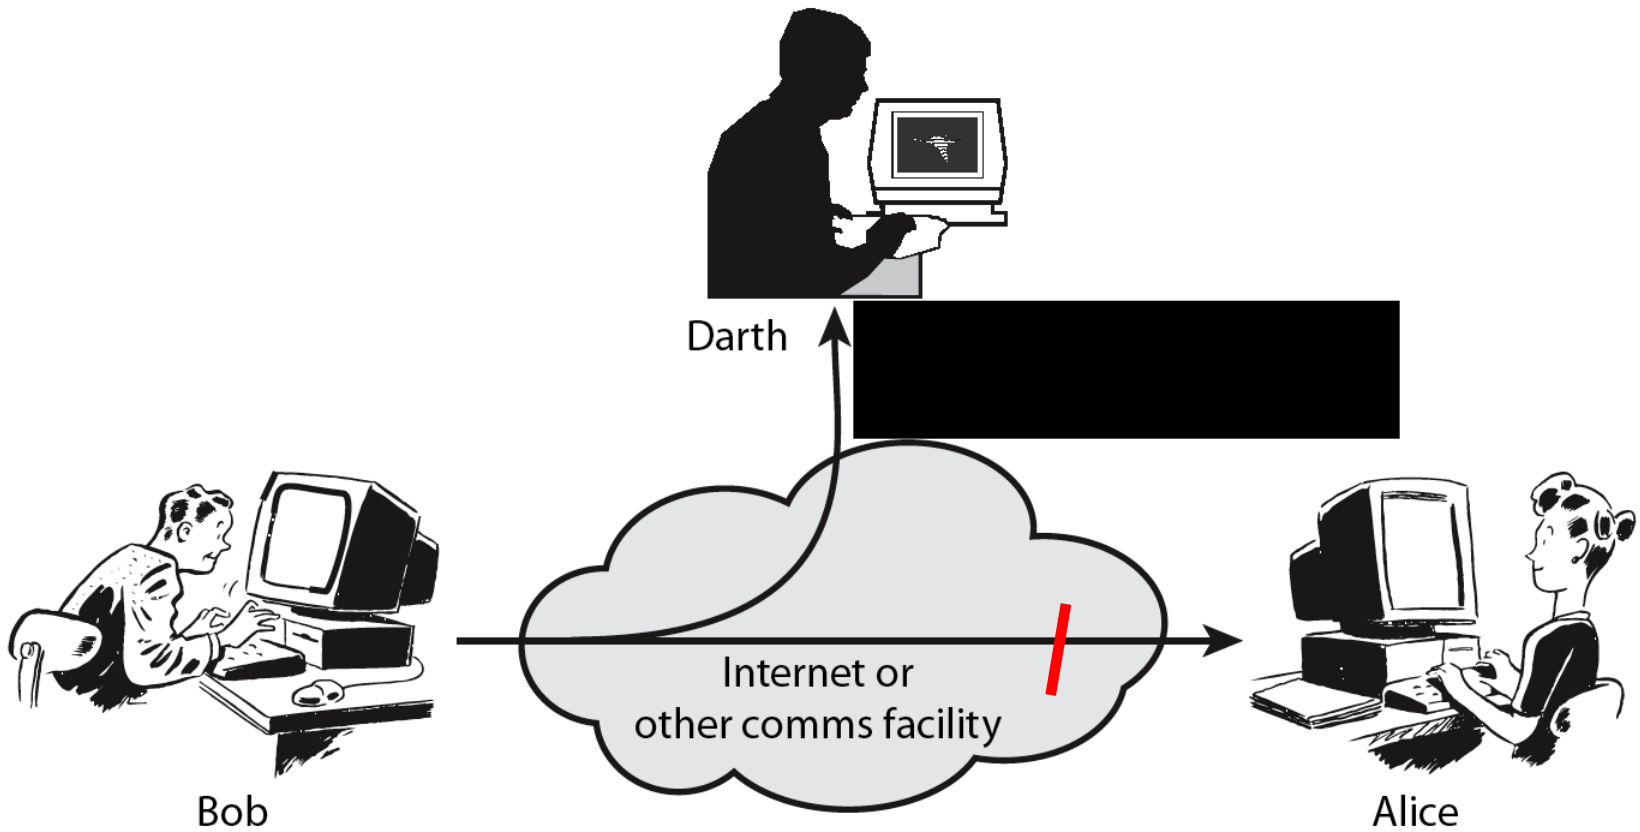


# Active Attack: Fabrication

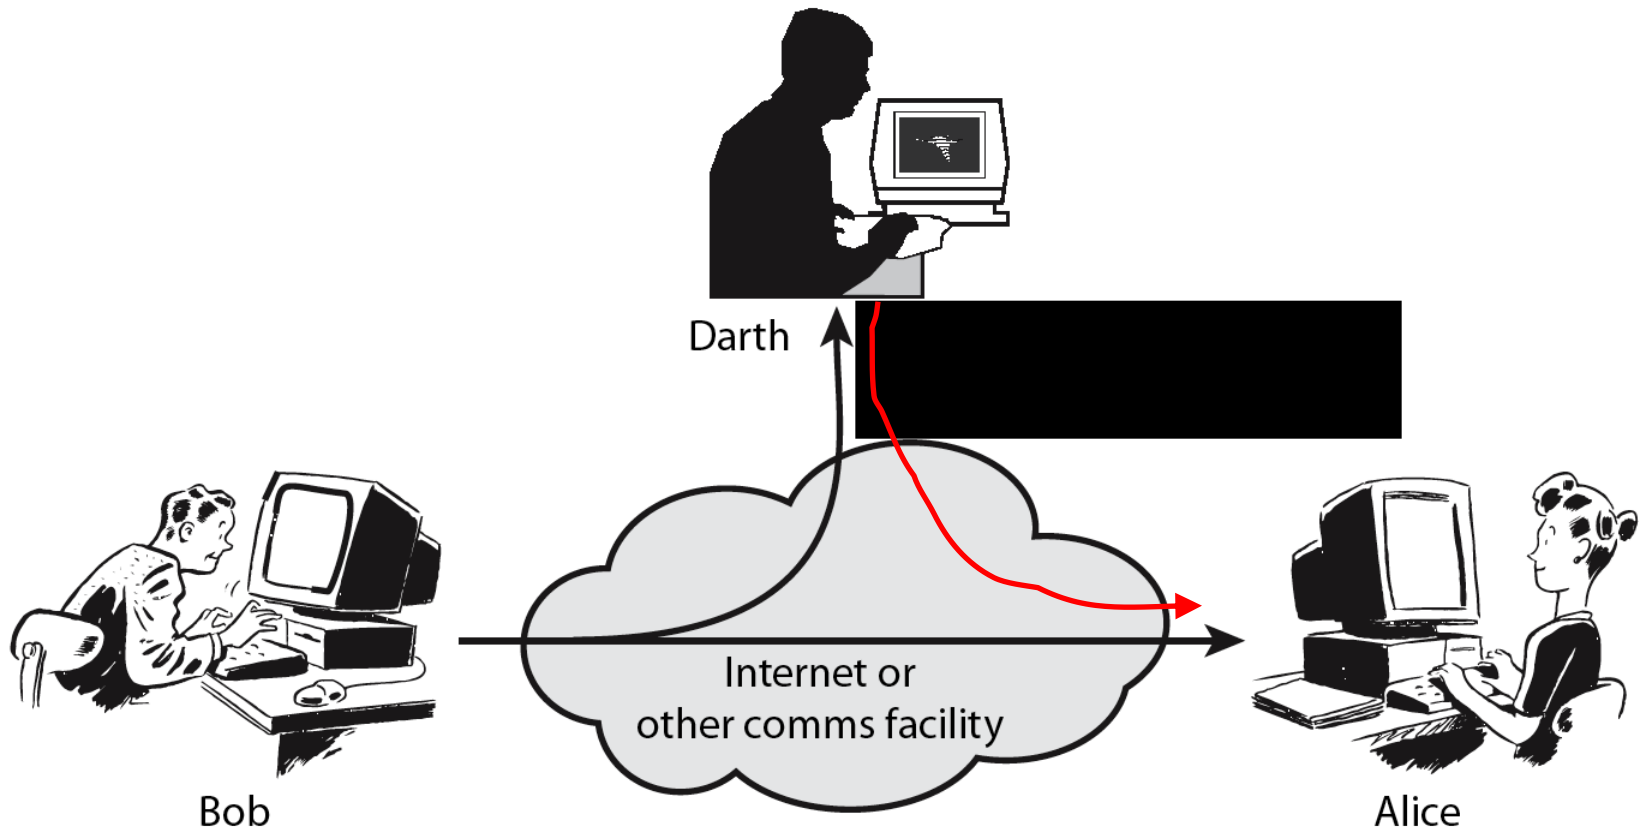

# Active Attack: Replay

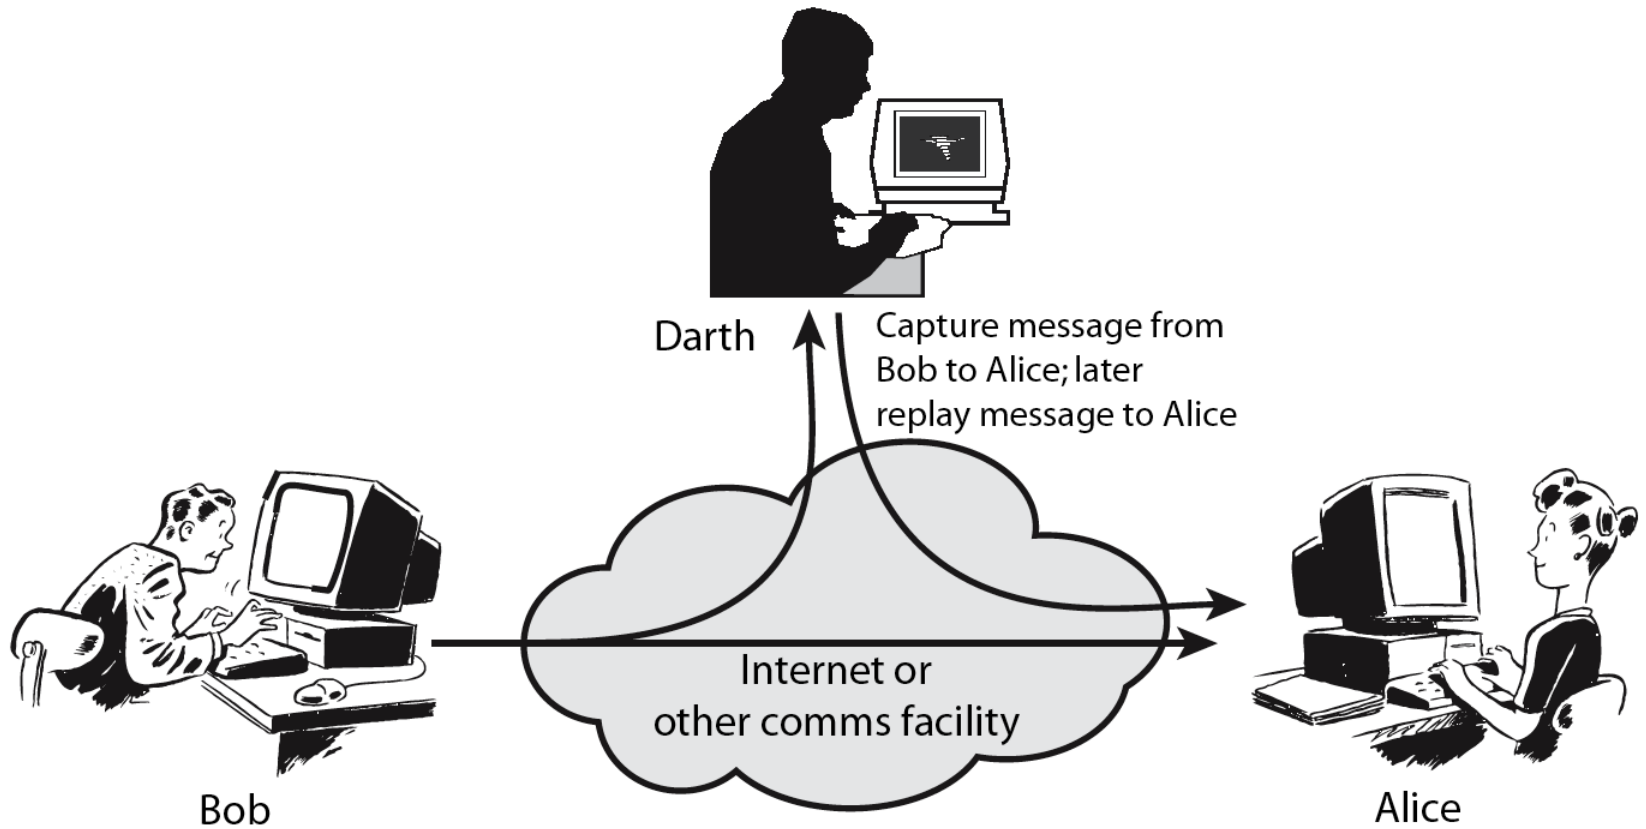

# Active Attack: Modification

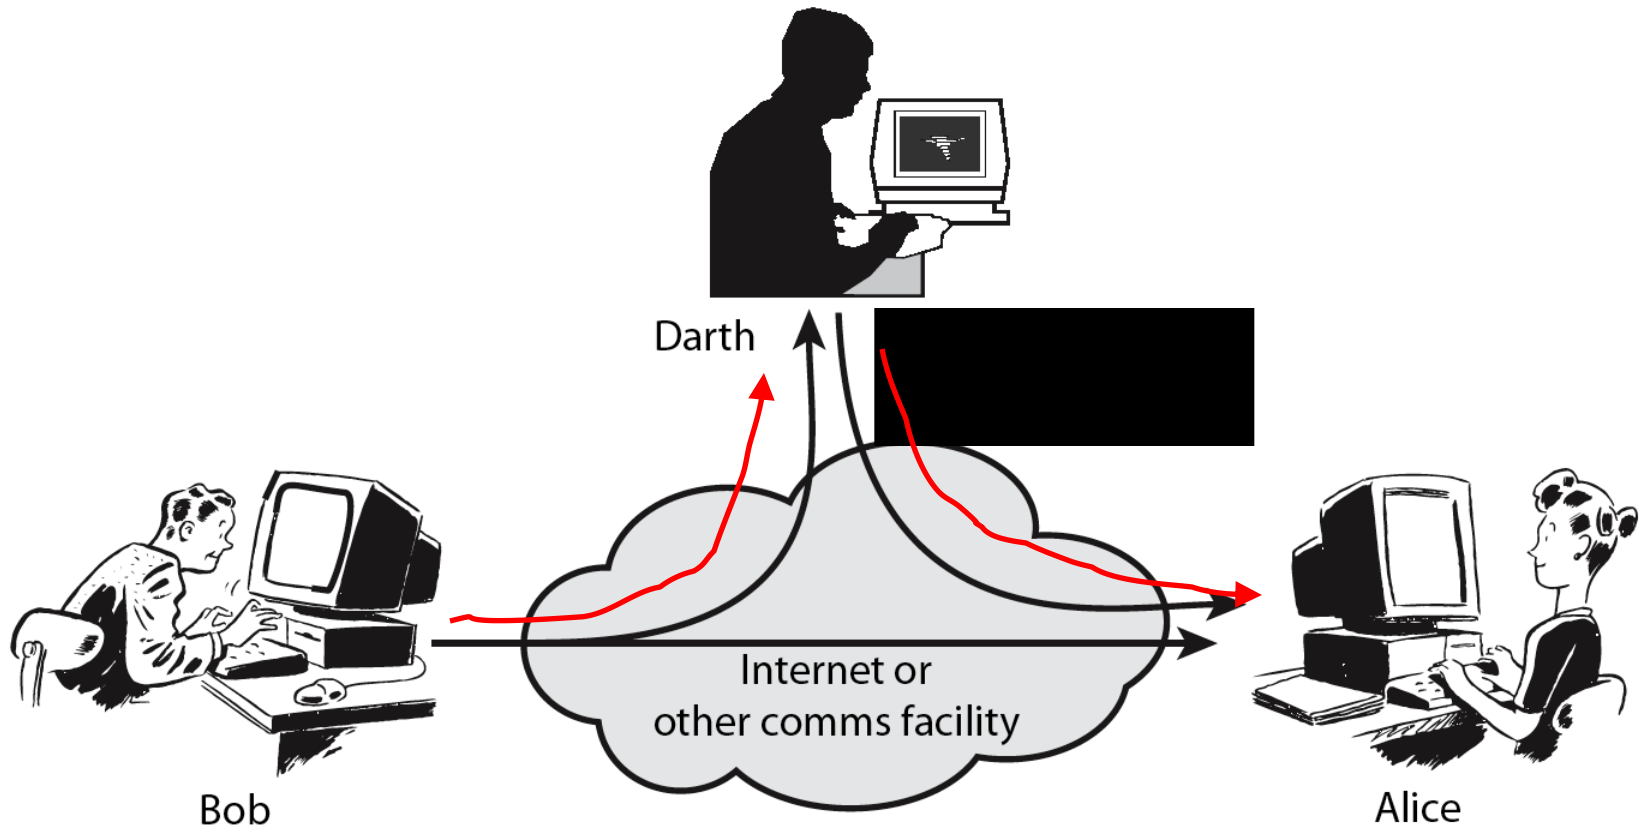

# Handling Attacks

- Passive attacks – focus on Prevention
  - Easy to stop
  - Hard to detect
- Active attacks – focus on Detection and Recovery
  - Hard to stop
  - Easy to detect

# Security Service

- enhance security of data processing systems and information transfers of an organization
- intended to counter security attacks
- using one or more security mechanisms
- often replicates functions normally associated with physical documents
  - which, for example, have signatures, dates; need protection from disclosure, tampering, or destruction; be notarized or witnessed; be recorded or licensed

# Security Services

- X.800:  
“a service provided by a protocol layer of communicating open systems, which ensures adequate security of the systems or of data transfers”
- RFC 2828:  
“a processing or communication service provided by a system to give a specific kind of protection to system resources”

# Security Services (X.800)

- **Authentication** - Assurance that a communicating entity is the one claimed
  - have both peer-entity & data origin authentication
- **Access Control** - prevention of the unauthorized use of a resource
- **Data Confidentiality** –protection of data from unauthorized disclosure
- **Data Integrity** - assurance that data received is as sent by an authorized entity
- **Non-Repudiation** - protection against denial by one of the parties in a communication
- **Availability** – resource accessible/usable



# Security Mechanism

- a.k.a. control
- feature designed to detect, prevent, or recover from a security attack
- no single mechanism that will support all services required
- however one particular element underlies many of the security mechanisms in use:
  - **cryptographic techniques**
- hence our focus on this topic

# Security Mechanisms (X.800)


- specific security mechanisms:

- encipherment, digital signatures, access controls, data integrity, authentication exchange, traffic padding, routing control, notarization

- pervasive security mechanisms:

- trusted functionality, security labels, event detection, security audit trails, security recovery


# Model for Network Security

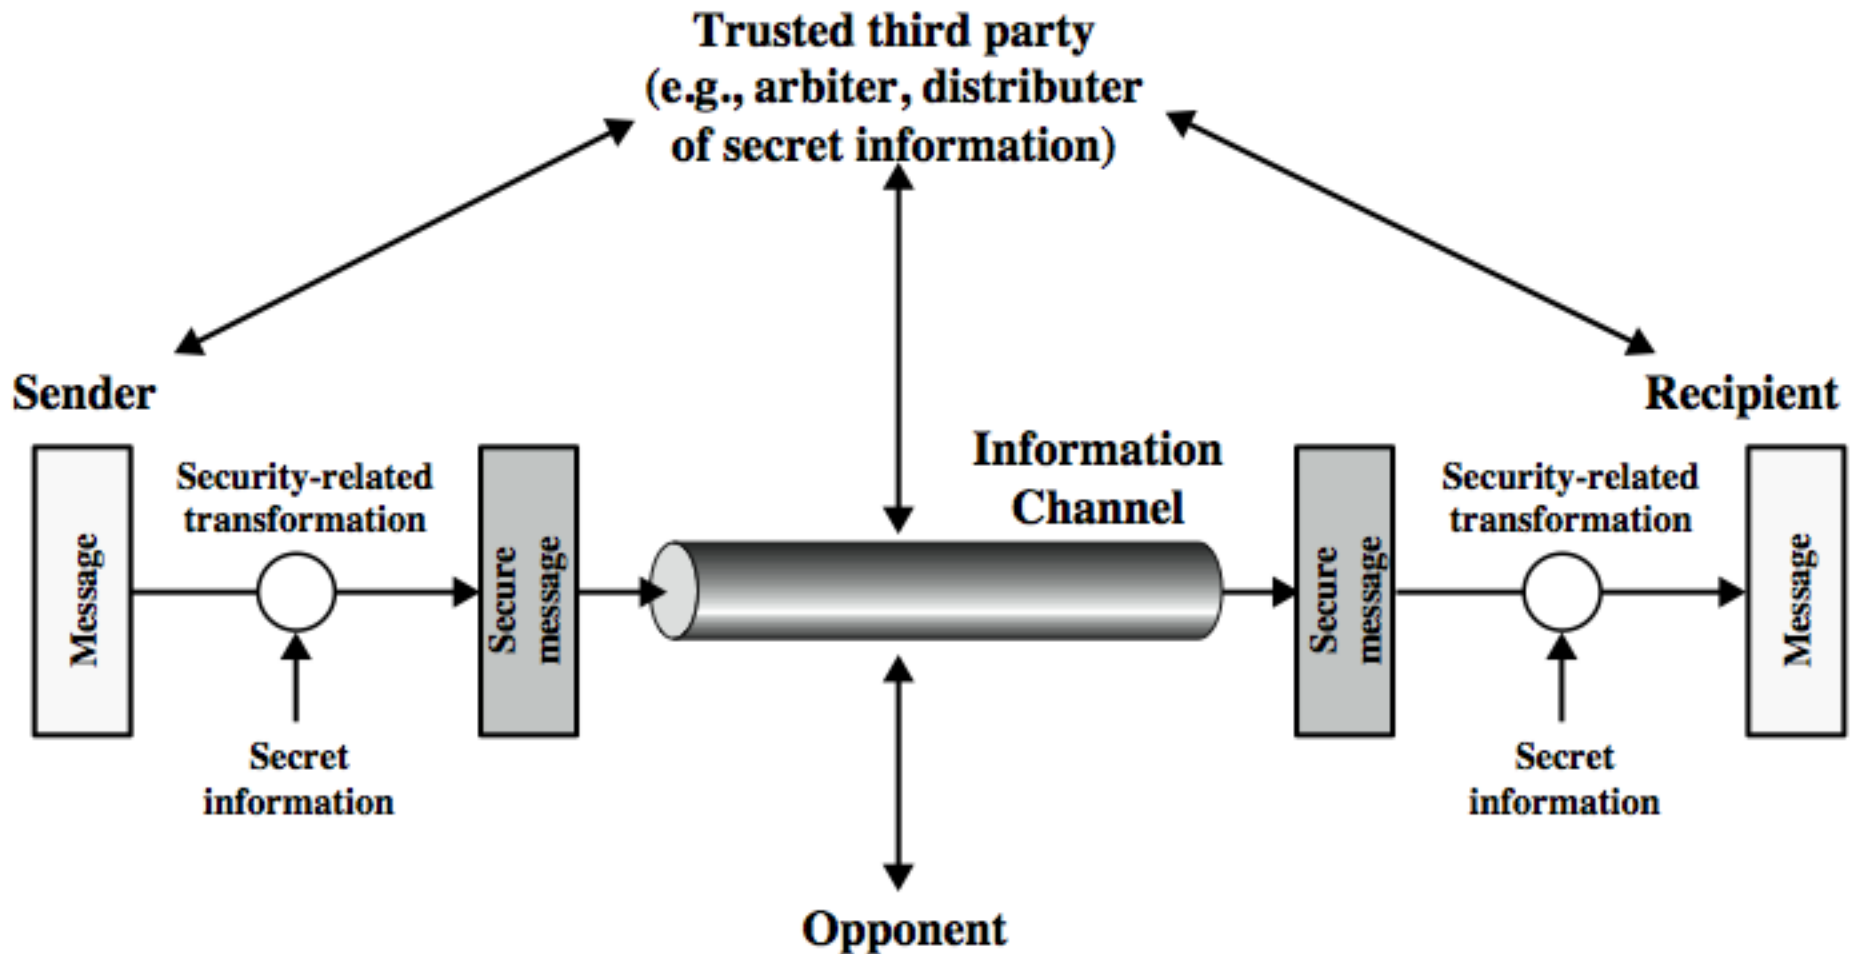

# Model for Network Security

- using this model requires us to:
  1. design a suitable **algorithm for the security transformation**
  2. **generate the secret information** (keys) used by the algorithm
  3. develop methods to **distribute and share the secret information**
  4. specify a **protocol** enabling the principals to use the transformation and secret information for a security service

# Model for Network Access Security

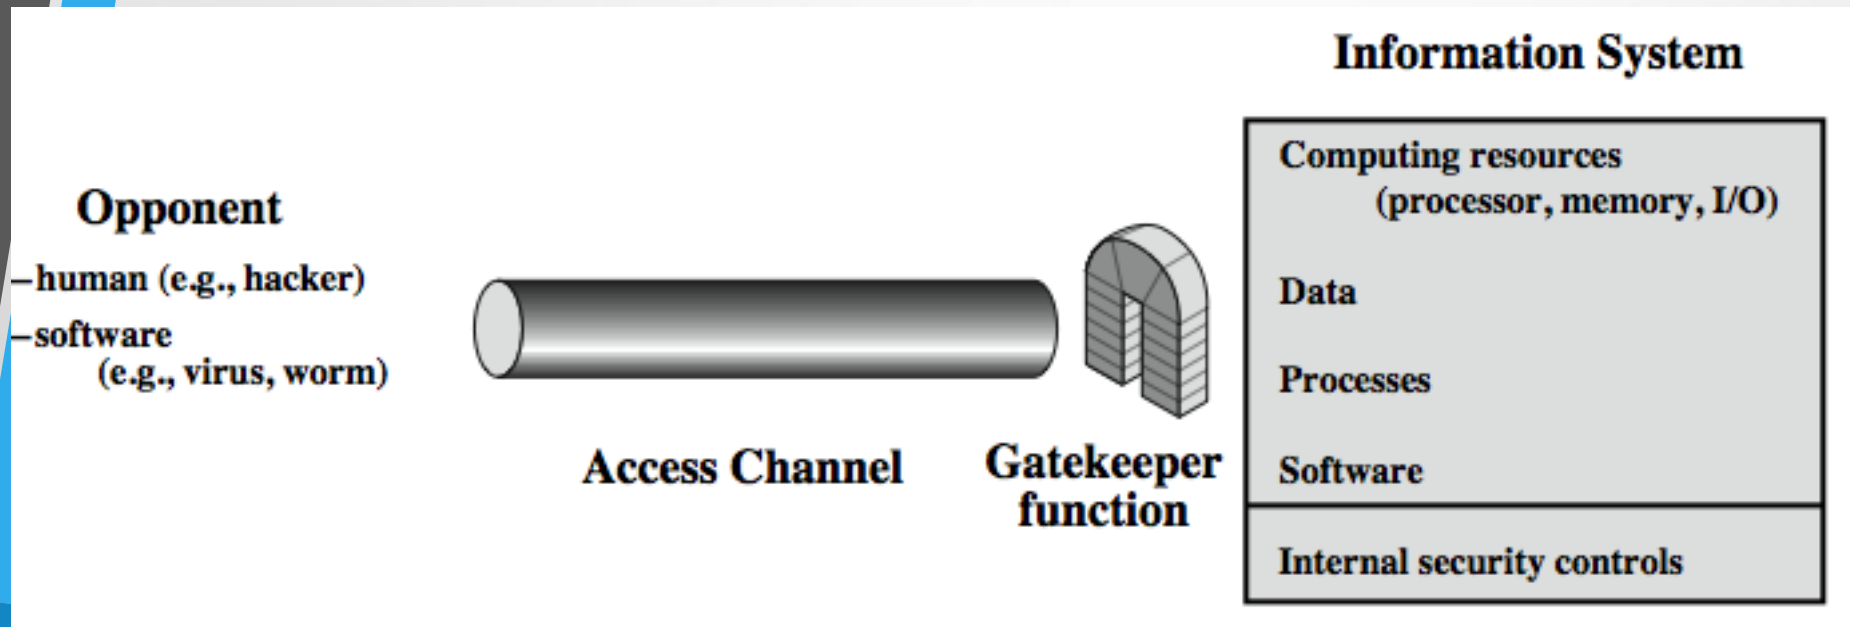

# Model for Network Access Security

- using this model requires us to:

1. select appropriate gatekeeper functions to identify users

➤ **note that model does not include:**

1. implement security controls to ensure only authorized users access designated information or resources

1. **monitoring of system for successful penetration**

2. **monitoring of authorized users for misuse**

3. **audit logging for forensic uses, etc.**

# Summary

- topic roadmap & standards organizations
- security concepts:
  - confidentiality, integrity, availability
- X.800 security architecture
- security attacks, services, mechanisms
- models for network (access) security